MICRO ELECTRONICS

ULTRA HIGH BRIGHTNESS RED LED LAMP

DESCRIPTION

MSB58TA-B is an ultra high brightness output red AlGaInp LED lamp encapsulated in a 5mm diameter clear transparent lens. 3 brightness grouping is provided for customer's selection.

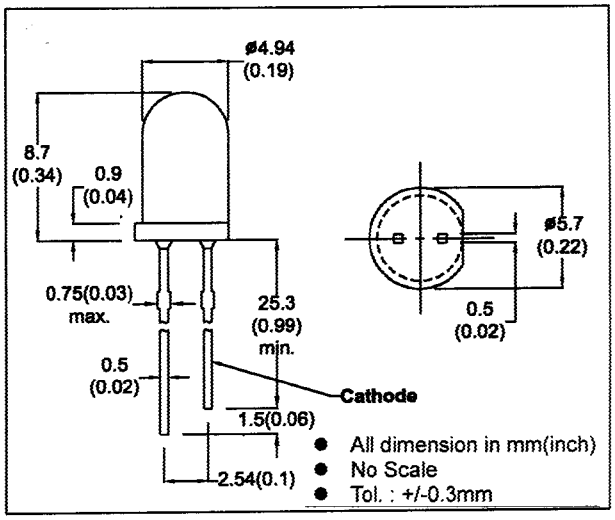

ABSOLUTE MAXIMUM RATINGS

Power Dissipation @Ta=25°C	100mW
Forward Current, DC (IF)	40mA
Reverse Voltage	5V
Operating & Storage Temperature	-55 to +100°C
Lead Soldering Temperature (1/16" from body)	260°C for 5 sec.

ELECTRO-OPTICAL CHARACTERISTICS (Ta=25°C)

PARAMETER	SYMBOL	MIN	TYP	MAX	UNIT	CONDITIONS
Forward Voltage	VF			2.6	V	IF=20mA
Emission Peak Wave Length	BVR	5			V	IR=100μA
Luminous Intensity	IV				mcd	IF=20mA
-3B		600	900		mcd	IF=20mA
-4B		900	1200		mcd	IF=20mA
-5B		1200	1500		mcd	IF=20mA
Peak Wavelength	λρ		645		mA	IF=20mA
Spectral Line Half Width	Δλ		22	25	Hz	IF=20mA
Viewing Angle	2θ 1/2		25		degree	IF=20mA

MICRO ELECTRONICS LTD.
38, Hung To Road, Microtron Bulding, Kwun Tong, Kowloon, Hong Kong.
Kwun Tong P.O. Box 69477 Hong Kong. Fax No. 2341 0321 Telex:43510 Micro Hx. Tel: 2343 0181-5

Downloaded from Elcodis.com electronic components distributor