


A suffix of "-C" specifies halogen & lead-free

## FEATURES


- RoHS Compliant Product
- Low Turn-on Voltage
- Fast Switching
- PN Junction Guard Ring for Transient and ESD Protection

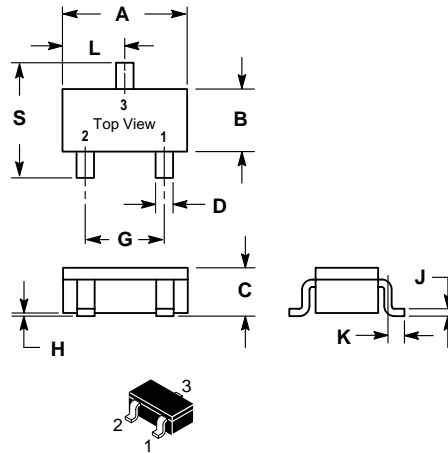

SC-59		
Dim	Min	Max
A	2.70	3.10
B	1.30	1.70
C	1.00	1.30
D	0.35	0.50
G	1.70	2.30
H	0.00	0.10
J	0.10	0.26
K	0.20	0.60
L	1.25	1.65
S	2.25	3.00
All Dimension in mm		

## MECHANICAL DATA

- Case: SOT-346 (SC-59), Molded Plastic
- Terminals: Solderable per MIL-STD-202, Method 208
- Polarity: See Diagrams Below
- Weight: 0.008 grams (approx.)
- Mounting Position: Any



SCS495D Marking : D3Q, 04F

## ABSOLUTE MAXIMUM RATINGS ( Ta = 25 °C )

PARAMETER	SYMBOL	LIMITS	UNIT
Peak Reverse Voltage	$V_{RM}$	40	V
DC Reverse Voltage	$V_R$	25	V
Mean Rectifying Current <sup>1</sup>	$I_O$	0.4	A
Peak Forward Surge Current <sup>2</sup>	$I_{FSM}$	2	A
Junction Temperature	$T_J$	125	°C
Operating Temperature	$T_{OPR}$	- 30 ~ + 85	°C
Storage Temperature	$T_{STG}$	25 ± 5	°C
Storage Humidity	RH	45 ± 5	%

\*1 Mean Output Current Per Element:  $I_O / 2$

\*2 60Hz for 1

## ● ELECTRICAL CHARACTERISTICS ( Ta = 25 °C )

PARAMETER	SYMBOL	Min.	Typ.	Max.	UNIT	CONDITIONS
Forward Voltage	$V_{F1}$	-	-	0.30	V	$I_F = 10 \text{ mA}$
	$V_{F2}$	-	-	0.50	V	$I_F = 200 \text{ mA}$
Reverse Current	$I_R$	-	-	70	µA	$V_R = 25 \text{ V}$

Note) ESD Sensitive Product Handling Required.

● RATING AND CHARACTERISTIC CURVES (  $T_a = 25\text{ }^\circ\text{C}$  )

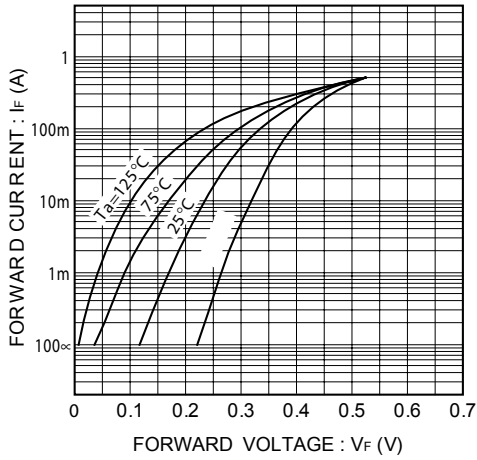


Fig.1 Forward characteristics

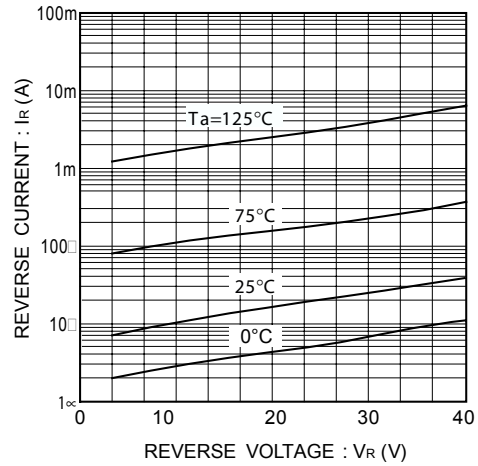


Fig.2 Reverse characteristics

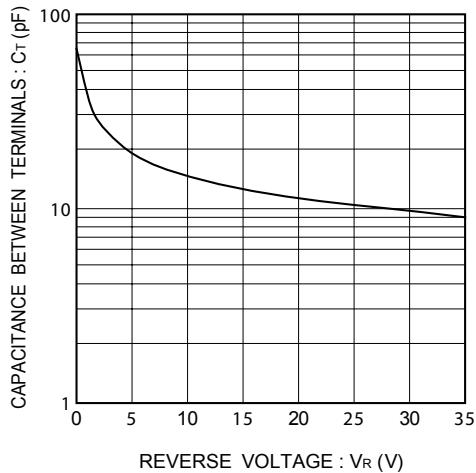


Fig.3 Capacitance between terminals characteristics