




Shielded SMD Power Inductor – PS



PS1608

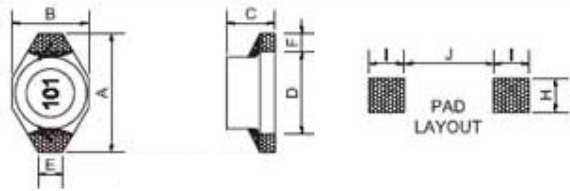

PS3316 / 5022

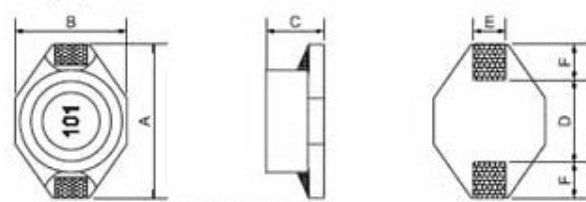

Features

- With magnetically shielded against radiation
- PS1608 can help to achieve longer battery life significantly in handheld communication devices.
- PS3316 / 5022 designed for the higher current requirements of portable computers.
- PS1608 used ceramic base with gold-plating
- PS3316 / 5022 used LCP plastic base

Applications

- Portable Telephones
- Personal Computers
- Other Various Electronic Appliances
- DC/DC Converters, etc.

Characteristics

- Saturation Rated Current (IDC): The DC current when the inductance becomes 10% lower than its initial value. (Ta=25°C)
- Temperature Rise Current (I rms): The actual current when temperature of coil becomes $\Delta 40^\circ\text{C}$. (Ta=25°C)
- Operating temperature range: $-40 \sim 85^\circ\text{C}$

Dimensions

Unit: mm

Type	A max.	B max.	C max.	D	E	F	H	I	J
PS1608	6.60	4.45	2.92	4.32	1.27	1.02	3.56	1.40	4.06
PS3316	12.95	9.40	5.21	7.62	2.54	2.54	2.79	2.92	7.37
PS5022	18.54	15.24	7.62	12.70	2.54	2.54	2.79	2.92	12.45

Inductance and rated current ranges

- PS1608 1.0~10000 μH 3.0~0.02A
- PS3316 1.0~1000 μH 5.0~0.17A
- PS5022 10~1000 μH 3.9~0.53A
- Test equipment:
L: HP4284A LCR meter
DCR: Milli-ohm meter
- Electrical specifications at 25°C

Product Identification

PS	1608	M	T	101
Product Type	Dimensions (AxBxC)	Inductor Tolerance	Packaging Style	Inductance
	1608: 6.60×4.45×2.92 3316: 12.95×9.4×5.21 5022: 18.54×15.24×7.62	K: $\pm 10\%$ M: $\pm 20\%$	T: Tape and Reel	1R1: 1.1 μH 470: 47 μH 101: 100 μH

Electrical Characteristics

PS1608 Type

Codes	L (μ H)	Tolerance	Test Condition		DCR (Ω) max.	SRF ref (MHz)	Q min.	I rms (A) max.
			L	Q				
1R0	1.0	M	100KHz, 0.1V	200KHz, 0.1V	0.040	250	30	3.00
1R5	1.5	M	100KHz, 0.1V	200KHz, 0.1V	0.045	125	30	2.30
2R2	2.2	M	100KHz, 0.1V	200KHz, 0.1V	0.050	120	40	1.80
3R3	3.3	M	100KHz, 0.1V	200KHz, 0.1V	0.055	120	40	1.60
4R7	4.7	M	100KHz, 0.1V	200KHz, 0.1V	0.060	105	40	1.40
6R8	6.8	M	100KHz, 0.1V	200KHz, 0.1V	0.065	50	40	1.20
100	10	M	100KHz, 0.1V	200KHz, 0.1V	0.075	38	40	1.00
150	15	M	100KHz, 0.1V	100KHz, 0.1V	0.090	33	40	0.80
220	22	M	100KHz, 0.1V	100KHz, 0.1V	0.11	25	40	0.70
330	33	M	100KHz, 0.1V	100KHz, 0.1V	0.19	20	40	0.60
470	47	M	100KHz, 0.1V	100KHz, 0.1V	0.23	20	40	0.50
680	68	M	100KHz, 0.1V	100KHz, 0.1V	0.29	15	40	0.40
101	100	K	100KHz, 0.1V	100KHz, 0.1V	0.48	10	40	0.30
151	150	K	100KHz, 0.1V	100KHz, 0.1V	0.59	9	40	0.26
221	220	K	100KHz, 0.1V	100KHz, 0.1V	0.90	6	40	0.22
331	330	K	100KHz, 0.1V	100KHz, 0.1V	1.40	5	40	0.20
471	470	K	100KHz, 0.1V	100KHz, 0.1V	1.80	4	40	0.19
681	680	K	100KHz, 0.1V	100KHz, 0.1V	2.20	3	40	0.18
102	1000	K	100KHz, 0.1V	100KHz, 0.1V	3.40	2	40	0.15
152	1500	K	100KHz, 0.1V	100KHz, 0.1V	4.20	2	50	0.12
222	2200	K	100KHz, 0.1V	100KHz, 0.1V	8.50	2	50	0.10
332	3300	K	100KHz, 0.1V	100KHz, 0.1V	11.0	1	50	0.08
472	4700	K	100KHz, 0.1V	100KHz, 0.1V	13.9	1	50	0.06
682	6800	K	100KHz, 0.1V	100KHz, 0.1V	25.0	1	50	0.04
103	10000	K	100KHz, 0.1V	100KHz, 0.1V	32.8	0.8	50	0.02

PS3316 Type

Codes	L (μ H)	Tolerance	Test Condition	DCR (Ω) max.	SRF ref (MHz)	IDC (A) max.	I rms (A) max.
1R0	1.0	M	100KHz, 0.1V	0.021	140	5.6	5.0
1R5	1.5	M	100KHz, 0.1V	0.022	120	5.2	4.5
2R2	2.2	M	100KHz, 0.1V	0.032	80	5.0	3.8
3R3	3.3	M	100KHz, 0.1V	0.039	70	3.9	3.3
4R7	4.7	M	100KHz, 0.1V	0.054	40	3.2	2.7
6R8	6.8	M	100KHz, 0.1V	0.075	38	2.8	2.2
100	10	M	100KHz, 0.1V	0.101	35	2.4	2.0
150	15	M	100KHz, 0.1V	0.150	25	2.0	1.5
220	22	M	100KHz, 0.1V	0.207	19	1.6	1.3
330	33	M	100KHz, 0.1V	0.334	15	1.4	1.1
470	47	M	100KHz, 0.1V	0.472	13	1.0	0.8
680	68	M	100KHz, 0.1V	0.660	10	0.9	0.7
101	100	M	100KHz, 0.1V	1.110	7	0.8	0.6
151	150	M	100KHz, 0.1V	1.550	6	0.6	0.5
221	220	M	100KHz, 0.1V	2.000	5	0.5	0.37
102	1000	M	100KHz, 0.1V	8.300	2	0.32	0.17

PS5022 Type

Codes	L (μ H)	Tolerance	Test Condition	DCR (Ω) max.	SRF ref (MHz)	IDC (A) max.	I rms (A) max.
100	10	M	100KHz, 0.1V	0.040	30	8.0	3.9
150	15	M	100KHz, 0.1V	0.048	20	7.00	3.4
220	22	M	100KHz, 0.1V	0.059	18	6.00	3.1
330	33	M	100KHz, 0.1V	0.075	14	5.00	2.8
470	47	M	100KHz, 0.1V	0.097	10	4.00	2.4
680	68	M	100KHz, 0.1V	0.138	9.0	3.00	2.0
101	100	M	100KHz, 0.1V	0.207	7.0	2.40	1.7
151	150	M	100KHz, 0.1V	0.293	6.0	2.10	1.3
221	220	M	100KHz, 0.1V	0.470	5.0	1.90	1.1
331	330	M	100KHz, 0.1V	0.780	4.0	1.10	0.86
471	470	M	100KHz, 0.1V	1.080	3.0	1.10	0.73
681	680	M	100KHz, 0.1V	1.400	2.5	0.96	0.64
102	1000	M	100KHz, 0.1V	2.010	2.0	0.80	0.53