

DIRECTIONAL COUPLER

C13-0150

The C13-0150 is an ultra broadband 1-50 GHz, 13 dB directional coupler. The multisection tri-plate stripline design exhibits excellent coupling flatness and VSWR at all ports. Custom designs are also available, contact the factory for details.



Features


- Ultra Broadband Performance
- Excellent Coupling Flatness
- High Directivity
- Low VSWR

Electrical Specifications

Parameter ¹	Frequency Range (GHz)	Min	Typ	Max
Mean Coupling (dB)			13	
Amplitude Flatness (dB) ²			±0.75	±1.75
Direct Line Insertion Loss (dB)				3
VSWR	1 to 40			1.35
	40 to 50			1.6
Directivity (dB)	1 to 30	13	16	
	30 to 50	8	12	
Weight (g)			45	

¹Specifications guaranteed when operated in a 50Ω system.

²Deviation from average coupling.

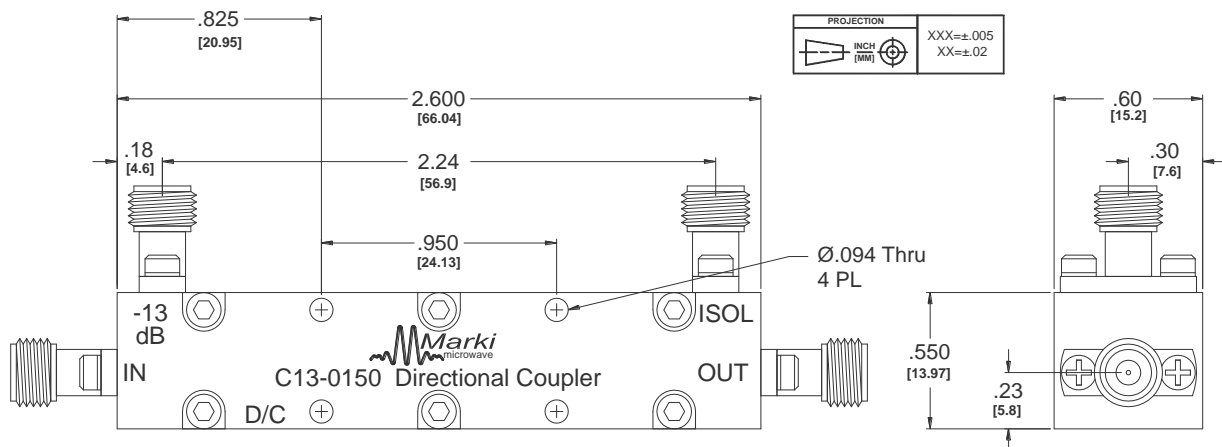

Typical Performance

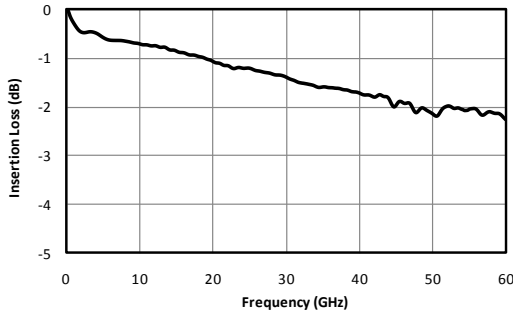


Fig. 1. Direct line insertion loss.

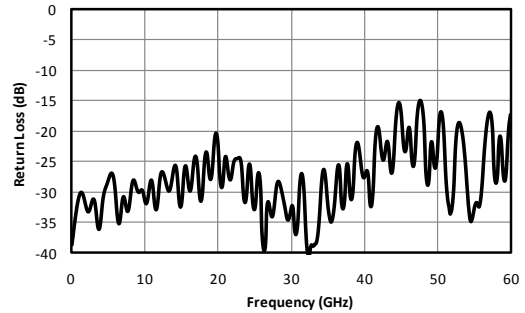


Fig. 2. Typical port return loss.

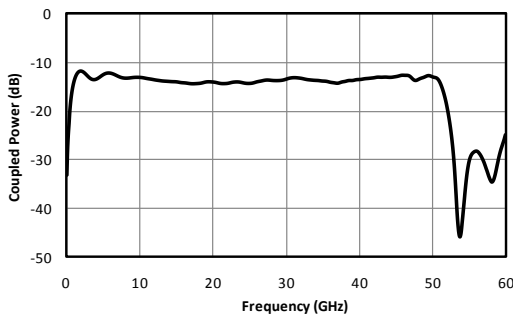


Fig. 3. Coupled port power.

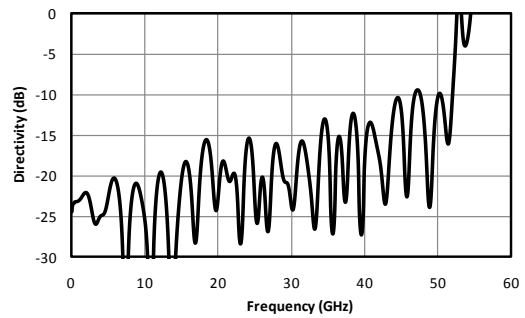


Fig. 4. Typical directivity.

Model Number	Description
C13-0150	1-50 GHz 13 dB Directional Coupler with 2.4 mm Female connectors

Marki Microwave reserves the right to make changes to the product(s) or information contained herein without notice. Marki Microwave makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Marki Microwave assume any liability whatsoever arising out of the use of or application of any product.

© Marki Microwave, Inc.

