



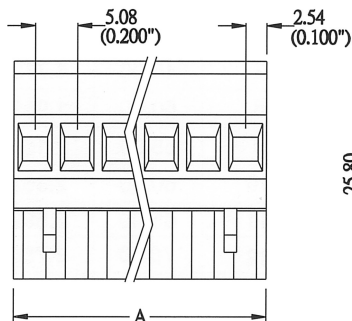

# Printed Circuit Board Connectors

Plugs • 90° • Pitch:5.08 mm



## Material

Cage clamp:	Brass, Ni plated
Contact:	Phosphor bronze, Tin plated, 0.4t
Insulating Body:	Polyamide66 (UL94V-0)
Screw:	M2.6, steel, Zinc plated
Color:	Green

## Environmental

Operation temperature:	-55°C to +105°C
Short-time temperature:	Up to 250°C (+482°F)

## Electrical

Current rating:	16 amp AC300V
Insulation withstanding volt:	AC2000V min
Insulation resistance:	>5000Ω at DC500V
Wire strip length:	4 mm - 5 mm
Wire range:	14 - 24 AWG
Screws torque:	4.5 lb-inch

## Item No.

## Poles

## A (mm)

## A (inch)

P-200-50802	2	10.16	0.400
P-200-50803	3	15.24	0.600
P-200-50804	4	20.32	0.800
P-200-50805	5	25.40	1.000
P-200-50806	6	30.48	1.200
P-200-50807	7	35.56	1.400
P-200-50808	8	40.64	1.600
P-200-50809	9	45.72	1.800
P-200-50810	10	50.80	2.000
P-200-50811	11	55.88	2.200
P-200-50812	12	60.96	2.400
P-200-50824	24	121.92	4.800