



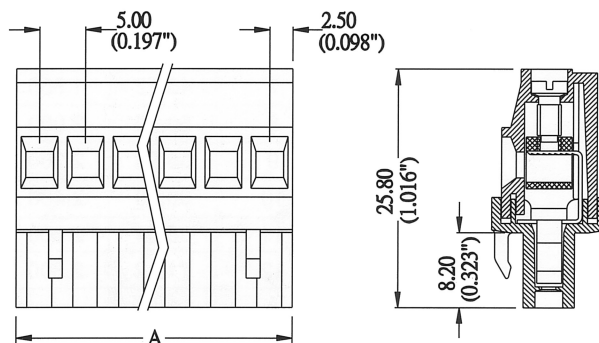

Printed Circuit Board Connectors

Plugs • 90° • Pitch:5.00 mm

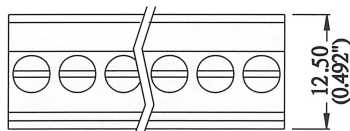

Material

Cage clamp:	Brass, Ni plated
Contact:	Phosphor bronze, Tin plated, 0.4t
Insulating Body:	Polyamide66 (UL94V-0)
Screw:	M2.6, steel, Zinc plated
Color:	Green

Environmental

Operation temperature:	-55°C to +105°C
Short-time temperature:	Up to 250°C (+482°F)

Electrical

Current rating:	16 amp AC300V
Insulation withstanding volt:	AC2000V min
Insulation resistance:	>5000Ω at DC500V
Wire strip length:	7 mm
Wire range:	14 - 24 AWG
Screws torque:	4.5 lb-inch

Item No.	Poles	A (mm)	A (inch)
P-200-50002	2	10.00	0.394
P-200-50003	3	15.00	0.591
P-200-50004	4	20.00	0.787
P-200-50005	5	25.00	0.984
P-200-50006	6	30.00	1.181
P-200-50007	7	35.00	1.378
P-200-50008	8	40.00	1.575
P-200-50009	9	45.00	1.772
P-200-50010	10	50.00	1.969
P-200-50011	11	55.00	2.165
P-200-50012	12	60.00	2.362
P-200-50024	24	120.00	4.724