
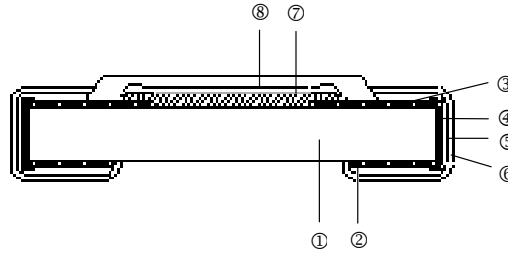


# Thin Film Array Chip Resistor – TFAN Series

## Construction

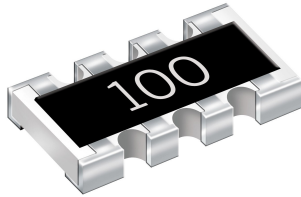


① Alumina Substrate	④ Edge Electrode (Ag)	⑦ Resistor Layer (NiCr)
② Bottom Electrode (Ag)	⑤ Barrier Layer (Ni)	⑧ Overcoat (Epoxy)
③ Top Electrode (Ag-Pd)	⑥ External Electrode (Sn)	

## Features

- Advanced thin film technology
- Very tight tolerance down to  $\pm 0.1\%$
- Extremely low TCR down to  $\pm 25\text{PPM}/^\circ\text{C}$
- RoHS compliant component, compatible with lead (Pb)-free


## Derating Curve

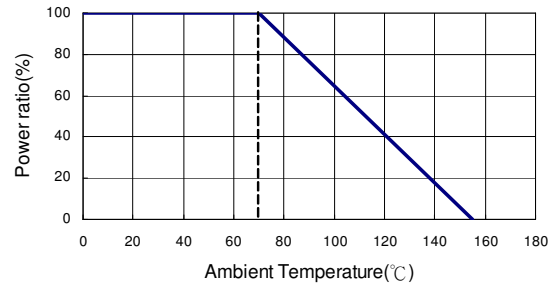

## Applications

- Voltage divider
- Feedback circuits
- Signal conditioning

## Dimensions

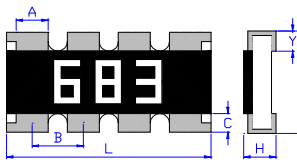

Type	Number of Resistors	L	W	H	A	B	C	Y
TFAN43	4	3.2 $\pm$ 0.15	1.6 $\pm$ 0.15	0.55 $\pm$ 0.10	0.5 $\pm$ 0.15	0.8 $\pm$ 0.05	0.3 $\pm$ 0.15	0.3 $\pm$ 0.15

## Part Numbering

TFAN	43	B	T	C	Y	1001	N
Product Type	Dimensions	Resistance Tolerance	Packaging Code	TCR (PPM/°C)	Power Rating	Resistance	Marking Code
	43: 0603X4	B: $\pm 0.1\%$ C: $\pm 0.25\%$ D: $\pm 0.5\%$ F: $\pm 1\%$	T: Taping Reel B: Bulk	C: $\pm 25$ D: $\pm 50$	: Standard Y: 1/16W	0010: 1 $\Omega$ 4R70: 4.7 $\Omega$ 1001: 1K $\Omega$ 1004: 1M $\Omega$	: Standard Marking for E96 N: No Marking

## Electrical Specifications

Item Type	Power Rating at 70°C	Operating Temp. Range	Max. Operating Voltage	Max. Overload Voltage	Resistance Range				TCR (PPM/°C)
					$\pm 0.1\%$	$\pm 0.25\%$	$\pm 0.5\%$	$\pm 1\%$	
TFAN43	1/16	-55 ~ +155°C	50V	100V	100 - 20K				$\pm 25$ $\pm 50$

Operating Voltage= $\sqrt{(P^*R)}$  or Max. operating voltage listed above, whichever is lower.  
 Overload Voltage= $2.5^*\sqrt{(P^*R)}$  or Max. overload voltage listed above, whichever is lower.

## Environmental Characteristics

Item	Requirement		Test Method
	Tol. $\leq 0.25\%$	Tol. $> 0.25\%$	
Temperature Coefficient of Resistance (T.C.R.)	As Spec.		+25/-55/+25/+125/+25°C
Short Time Overload	$\Delta R \pm 0.25\%$	$\Delta R \pm 0.5\%$	RCWV*2.5 or Max. overload voltage for 5 seconds
Insulation Resistance	$> 1000 \text{ M}\Omega$		Apply $100V_{DC}$ for 1 minute
Endurance	$\Delta R \pm 0.25\%$	$\Delta R \pm 0.5\%$	$70 \pm 2^\circ\text{C}$ , Max. working voltage for 1000 hrs with 1.5 hrs "ON" and 0.5 hrs "OFF"
Damp Heat with Load	$\Delta R \pm 0.25\%$	$\Delta R \pm 0.5\%$	$40 \pm 2^\circ\text{C}$ , 90~95% R.H. Max. working voltage for 1000 hrs with 1.5 hrs "ON" and 0.5 hrs "OFF"
Bending Strength	$\Delta R \pm 0.25\%$	$\Delta R \pm 0.5\%$	Bending amplitude 3 mm for 10 seconds
Solderability	95% min. coverage		$245 \pm 5^\circ\text{C}$ for 3 seconds
Resistance to Soldering Heat	$\Delta R \pm 0.25\%$	$\Delta R \pm 0.5\%$	$260 \pm 5^\circ\text{C}$ for 10 seconds
Dielectric Withstand Voltage	100V		Max. overload voltage for 1 minute
Thermal Shock	$\Delta R \pm 0.25\%$	$\Delta R \pm 0.5\%$	$-55^\circ\text{C} \sim 150^\circ\text{C}$ , 100 cycles
Low Temperature Operation	$\Delta R \pm 0.25\%$	$\Delta R \pm 0.5\%$	1 hour, $-65^\circ\text{C}$ , followed by 45 minutes of RCWV

Reference Standards: MIL-STD-202F; JIS-C 5201-1


Storage Temperature:  $25 \pm 3^\circ\text{C}$ ; Humidity  $< 80\%RH$

## Packaging


Reel Specifications & Packaging Quantity

Unit: mm

Type	Packaging Quantity	Tape Width	Reel Diameter	$\Phi A$	$\Phi B$	$\Phi C$	W	T
TFAN43	Paper 5K	8mm	7 inch	$178.5 \pm 1.5$	$60^{+1/-0}$	$13.0 \pm 0.2$	$9.0 \pm 0.5$	$12.5 \pm 0.5$

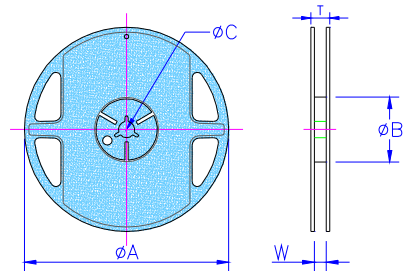

Paper Tape Specifications

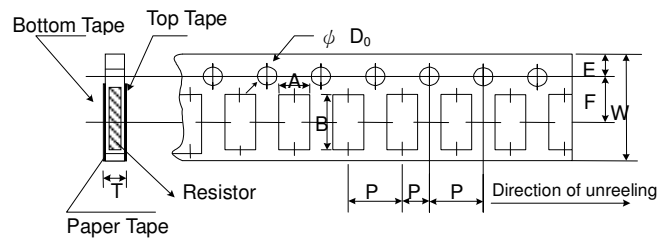

Unit: mm


Type	A	B	W	E	F	$P_0$	$P_1$	$P_2$	$\Phi D_0$	T
TFAN43	$1.95 \pm 0.1$	$3.50 \pm 0.1$	$8.0 \pm 0.2$	$1.75 \pm 0.1$	$3.5 \pm 0.05$	$4.0 \pm 0.1$	$4.0 \pm 0.05$	$2.0 \pm 0.05$	$1.5_{-0}^{+0.1}$	$0.85 \pm 0.1$

## Marking

TFAN43: 4 digits marking for example

Resistance	100Ω	2.2KΩ	10KΩ	49.9KΩ	100KΩ
marking	1000	2201	1002	4992	1003

## Recommend Land Pattern

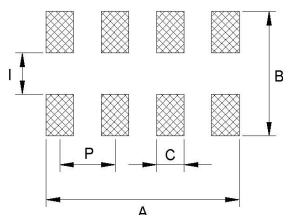

Unit: mm

Type	A	B	C	C1	I	I1	P	P1
TFAN43	2.85	3.10	0.45	--	0.80	--	0.80	--