

**TMA-4-0502**

# Low Noise Amplifier

## 0.5 GHz - 4 GHz

This Low Noise Amplifier offers low Noise figure performance of 3 dB over the band 0.5 GHz to 4 GHz with 17 dB Gain.

Teledyne Microwave amplifiers are balanced or feedback designs and manufactured with the latest MIC & MMIC technology. The GaAs FET's used in these amplifiers are well established proven devices from multiple sources.

Teledyne Microwave offers a complete line of Narrow and broadband Amplifiers covering the frequency range 500 MHz to 40 GHz. These products are available in either connectorized packages or as modules. For a complete list of these products and more, please visit our website.

Other products from Teledyne Microwave include: Transceivers, Synthesizers, and YIG Products



---

### Specifications:

Model Number: TMA-4-0502

Frequency Range: 0.5 GHz - 4 GHz

Gain (min): 17 dB

Gain Vs Temp at any Frequency: This Amplifier is not Temperature Compensated

Noise Figure (max): 3 dB

Output Power @ 1dB Compression: 18 dBm

Gain Flatness Vs Frequency: +/-1.0 dB

3<sup>rd</sup> Order Intercept (Typ): 27 dBm

Power Supply:

Input Voltage: 11.5 to 15 VDC

Current @ 12 VDC (typ): 140 mA

Current @ 12 VDC (max): 155 mA

Case Type (See attached Outline): SC2

Temperature Range: +25



**TELEDYNE  
MICROWAVE**

**ISO 9001:2000**

1274 Terra Bella Avenue, Mountain View, CA 94043 • PHN# 800.832.6869 or +1.650.962.6944 • FAX# 650.962.6845  
www.teledynemicrowave.com • microwave@teledyne.com


All Specifications are subject to change. Please contact Teledyne Microwave for the latest information on this product

08/05

TMA-4-0502

# Low Noise Amplifier

## 0.5 GHz - 4 GHz

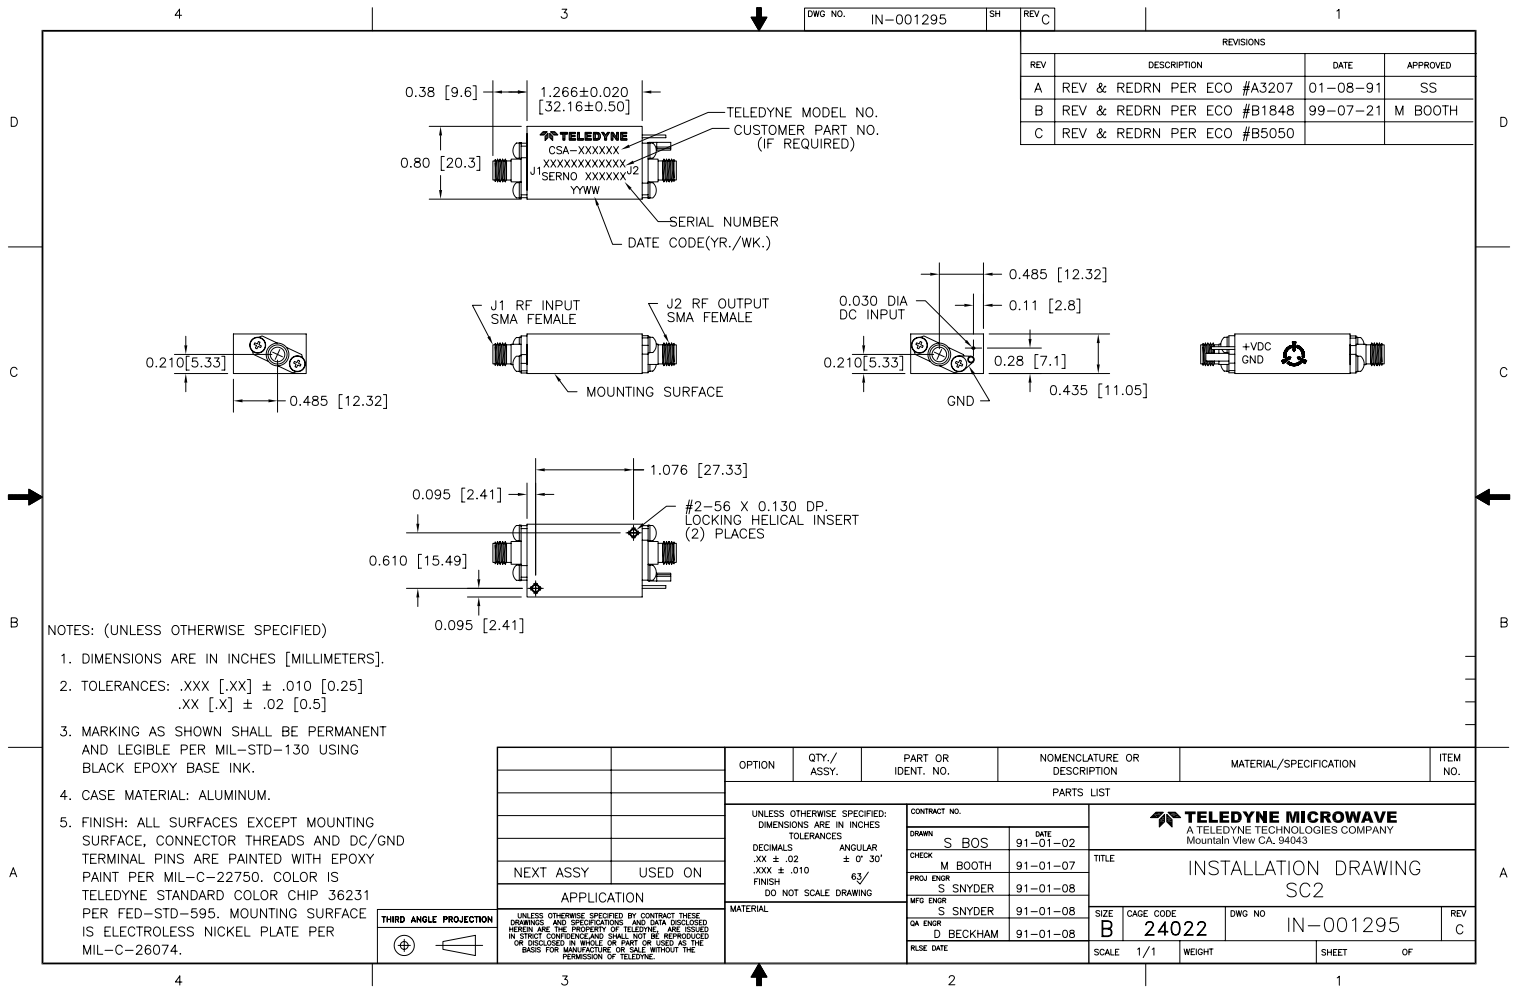

ISO 9001:2000

1274 Terra Bella Avenue, Mountain View, CA 94043 • PHN# 800.832.6869 or +1.650.962.6944 • FAX# 650.962.6845  
www.teledynemicrowave.com • microwave@teledyne.com

All Specifications are subject to change. Please contact Teledyne Microwave for the latest information on this product

08/05