

Slide Potentiometers for Fader Control of Mixers

Motor-driven Master Type(Motor N Fader, Motor K Fader)


RS N1 M/RSA0K1 V Series



Provides a superior operational feel with high-speed tracking in motor drive mode.

Rotary Potentiometers

Slide Potentiometers

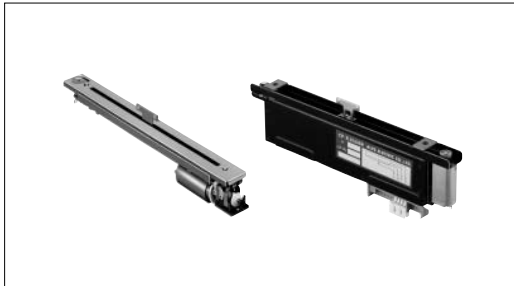

Typical Specifications

Items	Specifications	
	Motor N fader	Motor K fader
Total resistance tolerance	± 20%	
Maximum operating voltage	10V DC, 200V AC(Travel : 60mm) 10V DC, 500V AC(Travel : 100mm)	
Operating force	0.3 to 1.3N	0.15 to 0.65N
Operating life	30,000cycles	CP type : 300,000cycles
Operating temperature range	- 10 to + 60	
Rated voltage of motor	10V DC	
Maximum current of motor	800mA or less(at 10V DC)	

General-use

Mixer

Product Line

Number of resistor elements	Travel (mm)	Type	Lever type	Length of lever (mm)	Total resistance (kΩ)	Resistance taper	Terminal style	Touch sense track	Minimum packing unit (pcs.)	Products No.	Drawing No.
Single-unit	60	Motor N Fadar	9-T (T-bar)	8.2	10	1B	Lead	With	100	RS60N11M9A05	1
							For PC board			RS60N11M9A08	2
	Lead						RSA0N11M9A06			3	
	For PC board						RSA0N11M9A07			4	
	Connector						RSA0K11V900S			5	
	100	Motor K Fadar (CP type)									

Note

Products other than those listed in above products are also available. Please contact us for details.

Refer to P.441 for product varieties.

Dimensions

Unit:mm

No.	Style	
1		<p>Rotary Potentiometers</p> <p>Slide Potentiometers</p> <p>General-use</p> <p>Mixer</p>
2		<p>PC board mounting hole dimensions</p>
3		

Dimensions

Unit:mm

Rotary Potentiometers
Slide Potentiometers

General-use
Mixer

No.	Style	PC board mounting hole dimensions
4		
5		

Product Varieties

In addition to the recommended products, the following specifications can also be accommodated.

Products Specifications

Type	Travel (mm)	Model	Touch sense track	Terminal
Single-unit	60	RS60N11M	Available	For PC board for auto dipping Lead
		RSA0N11M		
	100	RSA0K11V		Fader Terminal : Connector Motor Terminal : Lead
		Motor N fader		60
Motor K fader CP type	100	RSA0N12M		
Dual-unit (Servo + Audio track)			Motor N fader	100
	Motor K fader CP type			

Rotary Potentiometers

Slide Potentiometers

Lever Types

Unit:mm

Configuration code	9-T (T-Bar)
Dimensions	<p>t=1.2</p>

General-use

Mixer

Total Resistance Variety


Total resistance(k)	10※	50	100	250

※ Motor K fader: Only 10k

Resistance Taper

Resistance taper	Servo	1B		
	Audio	15A	1B	10A

Circuit Diagram

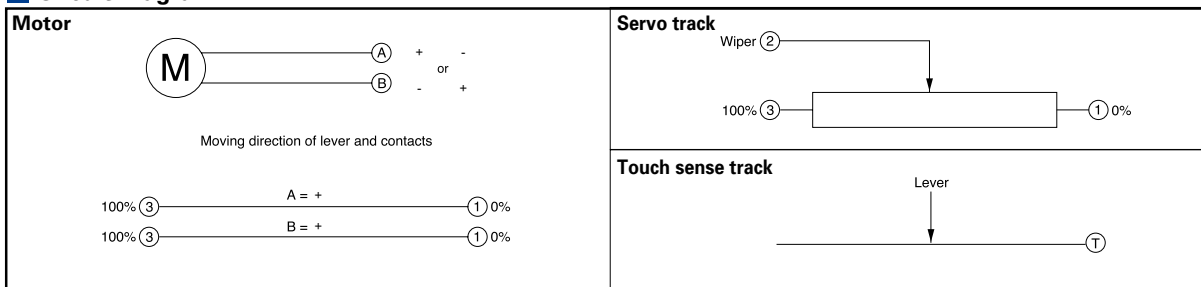

Notes

1. [] marked are specifications recommended by ALPS.
2. Products other than those listed in the above list are also available. Please contact us for details.

Refer to P.442, 443, 502 for resistance taper.

Orders Other Than Recommended Products

When ordering product varieties that are not listed in the Product Line, please specify by referring to the below example.

Sample Part Number

R S 6 0 N 1 1 M **T 0** **B 1 0 3**

Travel (mm)

60	60
A0	100

Number of resistor elements

Single-unit	1
Dual-unit	2


Touch sense track

Code	Touch sense track
T0	Without
T1	With

Resistance taper

Code	Resistance taper
B	1B
A	15A
D	10A

For dual-units specify the taper of the audio track. Servo track will always be 1B taper.



Total resistance

Code	Total resistance(kΩ)
103	10
503	50
104	100
254	250

Note

marked are specifications recommended by ALPS.

Rotary
Potentiometers

Slide
Potentiometers

General-use

Mixer

Orders Other Than Recommended Products

When ordering product varieties that are not listed in the Product Line, please specify by referring to the below example.

Sample part number

R S A 0 K 1 2 V - T 1 - A 1 0 3

Number of resistor elements

Single-unit	1
Dual-unit	2

Type

CP type	V
---------	---


Touch sense track

Code	Touch sense track
T0	Without
T1	With

Resistance taper

Code	Resistance taper
B	1B
A	15A
D	10A

Appoint the taper of audio track in the case of dual-unit.
Servo track is surely 1B taper.

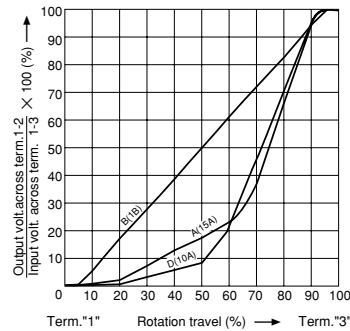

Total resistance

Code	Total resistance(kΩ)
103	10

Note

marked are specifications recommended by ALPS.







Rotary
Potentiometers

Slide
Potentiometers

General-use

Mixer

List of Varieties

Item	Master type		Low-profile master type				Motor-driven master type							
	RS	K	RS	N1	RS	N1S	RS6011	Y	RSA0K1	V	RS	N1	M	
Photo														
Outlined specifications	Travel (mm)		60 (RS60N11) 100 (RSA0N11) 100 (RSA0K12)		60 (RS60N11) 100 (RSA0N11) 60 (RS60N12) 100 (RSA0N12)		60 (RS60N11S) 100 (RSA0N11S)		60 (RS6011SY) 60 (RS6011DY)		100 (RSA0K11V)		60 (RS60N11M) 100 (RSA0N11M)	
	Number of resistor elements		Single-unit	Dual-unit	Single-unit	Dual-unit	Single-unit		Dual-unit	Single-unit (CP type)		Single-unit		
Electrical Performance	Total resistance (k)		10, 50, 100, 250				RS N1 : 10, 50, 100, 250 RS N1S : 10, 50, 100, 250 RS6011 Y : 10, 20, 50		RS N1 M : 10, 50, 100, 250 RSA0K1 V : 10					
	Resistance taper		15A, 1B				RS N1 : 15A, 1B, 10A RS N1 S : 15A, 1B, 10A RS6011 Y : 15A, 1B, 10A		Single-unit : 1B Dual-unit : Servo 1B Audio 15A, 1B, 10A					
Mechanical Performance	Operating force		Standard : 0.1 to 0.6N				RS N1 Single-unit : 0.05 to 0.8N Dual-unit : 0.05 to 0.9N RS6011 Y 0.1 to 2.0N RS N1S 0.05 to 0.8N		RS N1 M 0.3 to 1.3N RSA0K1 V, Single-unit : 0.15 to 0.65N					
	Stopper strength		100N											
	Lever push-pull strength		100N				50N							
	Lever deviation (mm) Both Side		$\frac{2(2 \times L)}{25}$											
	Lever deviation		0.5mm max. (One side)											
Soldering	Manual soldering		350 max. 3s max.											
	Dip soldering		—————				260 max. 5s max. RS N1 M (Lead type), RSA0K1 V : not available							
Environmental Performance	Cold		- 30 ± 2 for 96h											
	Dry heat		70 ± 2 for 240h											
	Damp heat		40 ± 2 , 90 to 95%RH for 96h											
Page		424		428		434		435		438				

Rotary Potentiometers

Slide Potentiometers

General-use

Mixer

Slide Volume Control Operations Cautions444, 445

Notes

1. Attenuation is specified for residual resistance.
2. "L" in the "Lever Wobble" column of the above table indicates the length of lever.
3. Products other than those listed in the above list are also available. Please contact us for details.