


OM3015 Series

Specifications:

Parameters	Units	OM3015GF443BS
Directivity	-	Omni-Directional
Sensitivity (0dB=1V/pa at 1kHz)	dB	-44 ± 3
Impedance	-	Low Impedance
Frequency Range	Hz	100 - 10000
Max Operating Voltage	V	5
Standard Operation Voltage (Vs)	V	3
Resistance Loading (RL)	Ω	2.2k
Max Current Consumption	mA	0.5
S/N Ratio	dB	>60
Operating Temperature	°C	-20 - +60



Unit: mm • Tolerance: ±0.5mm

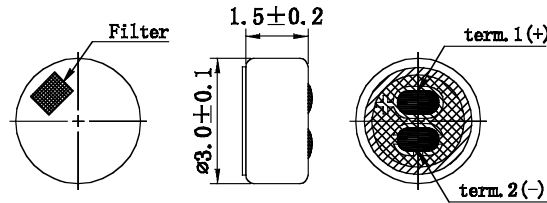


OM4015 Series

Specifications:

Parameters	Units	OM4015GF423BB
Directivity	-	Omni-Directional
Sensitivity (0dB=1V/pa at 1kHz)	dB	-42 ± 3
Impedance	-	Low Impedance
Frequency Range	Hz	100 - 10000
Max Operating Voltage	V	10
Standard Operation Voltage (Vs)	V	3
Resistance Loading (RL)	Ω	2.2k
Max Current Consumption	mA	0.5
S/N Ratio	dB	>60
Operating Temperature	°C	-20 - +60



Unit: mm • Tolerance: ±0.5mm

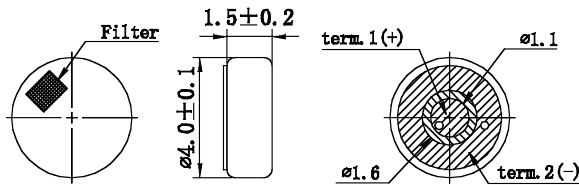


OM6027 Series

Specifications:

Parameters	Units	OM6027GF423P
Directivity	-	Omni-Directional
Sensitivity (0dB=1 V/pa at 1kHz)	dB	-42 ± 3
Impedance	-	Low Impedance
Frequency Range	Hz	50 - 16000
Max Operating Voltage	V	10
Standard Operation Voltage (Vs)	V	3
Resistance Loading (RL)	Ω	2.2k
Max Current Consumption	mA	0.5
S/N Ratio	dB	>60
Operating Temperature	°C	-20 - +60



Unit: mm • Tolerance: ±0.5mm

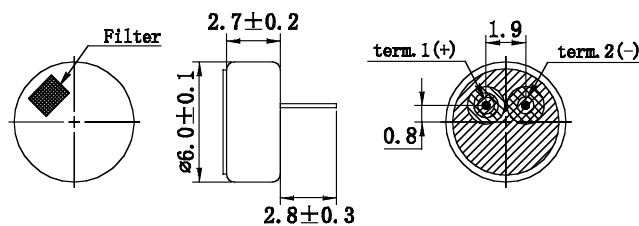


OM8050 Series

Specifications:

Parameters	Units	OM8050GF483S
Directivity	-	Omni-Directional
Sensitivity (0dB=1V/pa at 1kHz)	dB	-48 ± 3
Impedance	-	Low Impedance
Frequency Range	Hz	50 - 16000
Max Operating Voltage	V	10
Standard Operation Voltage (Vs)	V	3
Resistance Loading (RL)	Ω	2.2k
Max Current Consumption	mA	0.5
S/N Ratio	dB	>60
Operating Temperature	°C	-20 - +60



Unit: mm • Tolerance: ±0.5mm

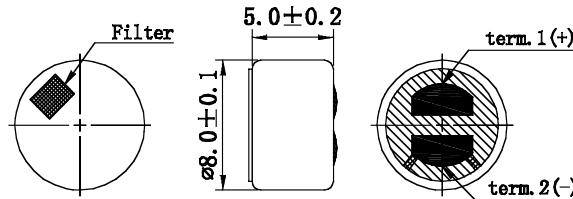


OM9745 Series

Specifications:

Parameters	Units	OM9745GF463P
Directivity	-	Omni-Directional
Sensitivity (0dB=1V/pa at 1kHz)	dB	-46 ± 3
Impedance	-	Low Impedance
Frequency Range	Hz	50 - 16000
Max Operating Voltage	V	10
Standard Operation Voltage (Vs)	V	3
Resistance Loading (RL)	Ω	2.2k
Max Current Consumption	mA	0.5
S/N Ratio	dB	>60
Operating Temperature	°C	-20 - +60



Unit: mm • Tolerance: ±0.5mm

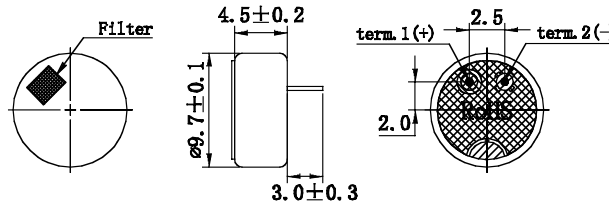

OM1050 Series

Specifications:

Parameters	Units	OM1050GF383FS
Directivity	-	Omni-Directional
Sensitivity (0dB=1 V/pa at 1kHz)	dB	-38 ± 3
Impedance	-	Low Impedance
Frequency Range	Hz	50 - 16000
Max Operating Voltage	V	10
Standard Operation Voltage (Vs)	V	3
Resistance Loading (RL)	Ω	2.2k
Max Current Consumption	mA	0.5
S/N Ratio	dB	>60
Operating Temperature	°C	-20 - +60



Unit: mm • Tolerance: ±0.5mm

