



NPN General Purpose Transistors

* “G” Lead(Pb)-Free


SOT-23
MAXIMUM RATINGS

Rating	Symbol	Value	Unit
Collector-Emitter Voltage	V_{CEO}	18	Vdc
Collector-Base Voltage	V_{CBO}	25	Vdc
Emitter-Base Voltage	V_{EBO}	4.0	Vdc
Collector Current-Continuous	I_C	50	mAdc

THERMAL CHARACTERISTICS

Characteristics	Symbol	Max	Unit
Total Device Dissipation FR-5 Board (1) $T_A=25^{\circ}\text{C}$ Derate above 25°C	P_D	225	mW
Thermal Resistance, Junction to Ambient	$R_{\theta JA}$	1.8	$\text{mW}/^{\circ}\text{C}$
Total Device Dissipation Alumina Substrate, (2) $T_A=25^{\circ}\text{C}$ Derate above 25°C	P_D	200	mW
Thermal Resistance, Junction to Ambient	$R_{\theta JA}$	1.14	$\text{mW}/^{\circ}\text{C}$
Junction and Storage, Temperature	T_J, T_{stg}	-55 to +150	$^{\circ}\text{C}$

DEVICE MARKING

S9018LT1=J8

ELECTRICAL CHARACTERISTICS

Characteristics	Symbol	Min	Max	Unit
-----------------	--------	-----	-----	------

OFF CHARACTERISTICS

Collector-Emitter Breakdown Voltage ($I_C=100\mu\text{Adc}, I_B=0$)	$V_{(BR)CEO}$	18	-	Vdc
Collector-Base Breakdown Voltage ($I_C=100\mu\text{Adc}, I_E=0$)	$V_{(BR)CBO}$	25	-	Vdc
Emitter-Base Breakdown Voltage ($I_E=100\mu\text{Adc}, I_C=0$)	$V_{(BR)EBO}$	4.0	-	Vdc
Collector Cutoff Current ($V_{CE}=15\text{Vdc}, I_E=0$)	I_{CEO}	-	0.1	μAdc
Collector Cutoff Current ($V_{CB}=20\text{Vdc}, I_E=0$)	I_{CBO}	-	0.1	μAdc
Emitter Cutoff Current ($V_{EB}=3.0\text{Vdc}, I_C=0$)	I_{EBO}	-	0.1	μAdc

1.FR-5=1.0 x 0.75 x 0.062 in

2.Alumina=0.4 x 0.3 x 0.024 in. 99.5% alumina

S9018LT1



ELECTRICAL CHARACTERISTICS ($T_A=25^\circ\text{C}$ unless otherwise noted) (Continued)

Characteristics	Symbol	Min	Max	Unit
-----------------	--------	-----	-----	------


ON CHARACTERISTICS

DC Current Gain ($I_C=1.0\text{ mAdc}, V_{CE}=5.0\text{ Vdc}$)	$h_{FE}^{(1)}$	70	190	-
Collector-Emitter Saturation Voltage ($I_C=10\text{ mAdc}, I_B=1.0\text{ mAdc}$)	$V_{CE(sat)}$	-	0.5	Vdc
Base-Emitter Saturation Voltage ($I_C=10\text{ mAdc}, I_B=1.0\text{ mAdc}$)	$V_{BE(sat)}$	-	1.4	Vdc

SMALL-SIGNAL CHARACTERISTICS


Current-Gain-Bandwidth Product ($I_C=5.0\text{ mAdc}, V_{CE}=5.0\text{ Vdc}, f=400\text{ MHz}$)	f_T	600	-	MHz
--	-------	-----	---	-----

Typical Characteristics

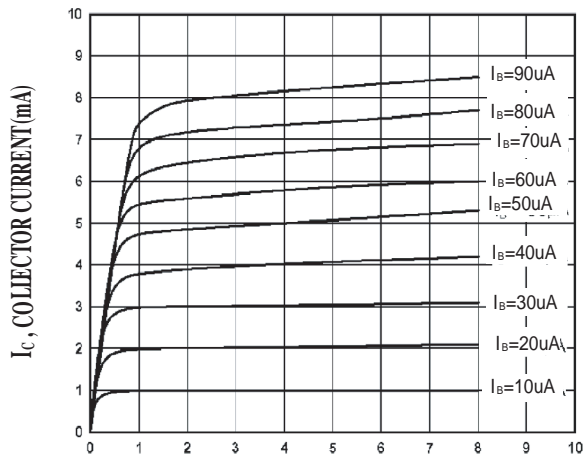


V_{CE} , COLLECTOR-EMITTER VOLTAGE (VOLTS)

FIG1. Static Characteristic

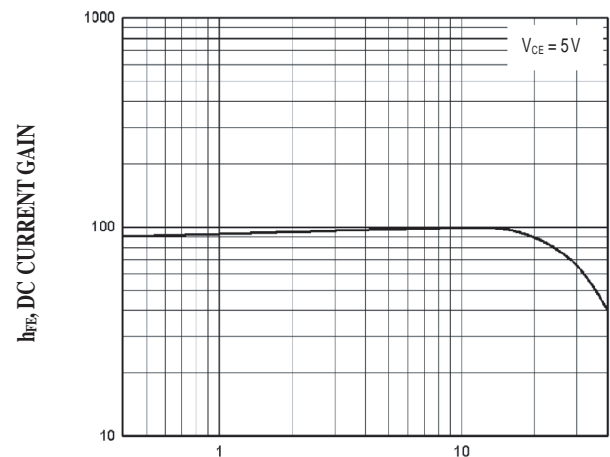


I_C , COLLECTOR CURRENT (mA)

FIG2. DC Current Gain

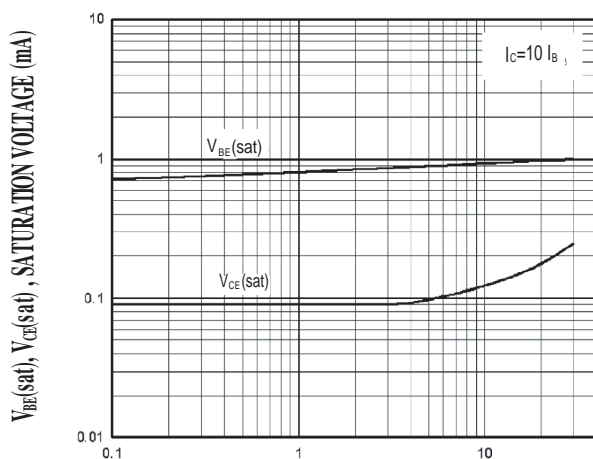

I_C , COLLECTOR CURRENT (mA)

**FIG3. Base-Emitter Saturation Voltage
Collector-Emitter Saturation Voltage**

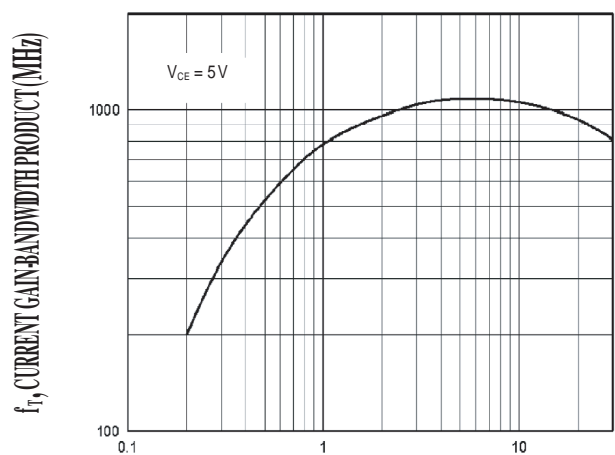

I_C , COLLECTOR CURRENT

FIG4. Current Gain Bandwidth Product