


FEATURES

- **LOW POWER CONSUMPTION:**
15 mW ($V_{CC} = 3.4$ V, $I_{CC} = 4.5$ mA)
- **HIGH POWER GAIN:** 20 dB (UPC2715T)
- **WIDE FREQUENCY RESPONSE:**
2 GHz (UPC2714T)
- **INTERNAL CURRENT REGULATION MINIMIZES GAIN CHANGE OVER TEMPERATURE**
- **SUPER SMALL PACKAGE**
- **TAPE AND REEL PACKAGING OPTION AVAILABLE**

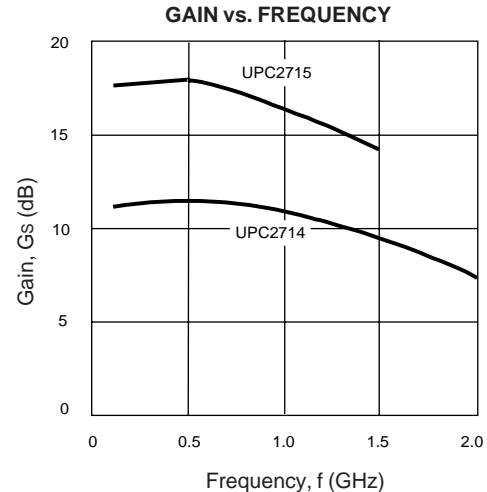

DESCRIPTION

The UPC2714T and UPC2715T are Silicon Monolithic integrated circuits manufactured using the NESAT III process. These devices are suitable for applications which require low power consumption and wide frequency operation. They are designed for low cost, low power consumption gain stages in cellular radios, GPS receivers, and PCN applications.

NEC's stringent quality assurance and test procedures ensure the highest reliability and performance.

ELECTRICAL CHARACTERISTICS ($T_A = 25^\circ\text{C}$, $f = 0.5$ GHz, $V_{CC} = 3.4$ V)

PART NUMBER PACKAGE OUTLINE			UPC2714T T06			UPC2715T T06		
SYMBOLS	PARAMETERS AND CONDITIONS	UNITS	MIN	TYP	MAX	MIN	TYP	MAX
I_{CC}	Circuit Current	mA	3.3	4.5	5.7	3.3	4.5	5.7
G_s	Small Signal Gain	dB	8.5	11.5	15.5	16	19	23
f_u	Upper Limit Operating Frequency (The gain at f_u is 3 dB down from the gain at 0.1 GHz)	GHz	1.4	1.8		0.9	1.2	
ΔG_s	Gain Flatness, $f = 0.1 \sim 0.6$ GHz	dB		± 1.0			± 1.0	
P_{SAT}	Saturated Output Power	dBm	-10	-7		-9	-6	
NF	Noise Figure	dB		5.0	6.5		4.5	6.0
RLIN	Input Return Loss	dB	10	13		12	17	
RLOUT	Output Return Loss	dB	5	8		5	8	
ISOL	Isolation	dB	22	27		28	33	
ΔG_T	Gain-Temperature Coefficient	dB/ $^\circ\text{C}$		+0.006			+0.006	
RTH	Thermal Resistance (Junction to Ambient)	$^\circ\text{C}/\text{W}$			200			200

UPC2714T, UPC2715T

ABSOLUTE MAXIMUM RATINGS¹ (T_A = 25°C)

SYMBOLS	PARAMETERS	UNITS	RATINGS
V _{CC}	Supply Voltage	V	4.0
P _{IN}	Input Power	dBm	-5
P _T	Total Power Dissipation ²	mW	200
T _{OP}	Operating Temperature	°C	-40 to +85
T _{STG}	Storage Temperature	°C	-55 to +150





Notes:

1. Operation in excess of any one of these parameters may result in permanent damage.
2. Mounted on 50 x 50 x 1.6 mm epoxy glass PWB (T_A = 85°C).

RECOMMENDED OPERATING CONDITIONS


SYMBOL	PARAMETER	UNITS	MIN	TYP	MAX
V _{CC}	Supply Voltage	V	3.06	3.4	3.74

TYPICAL PERFORMANCE CURVES (T_A = 25°C)

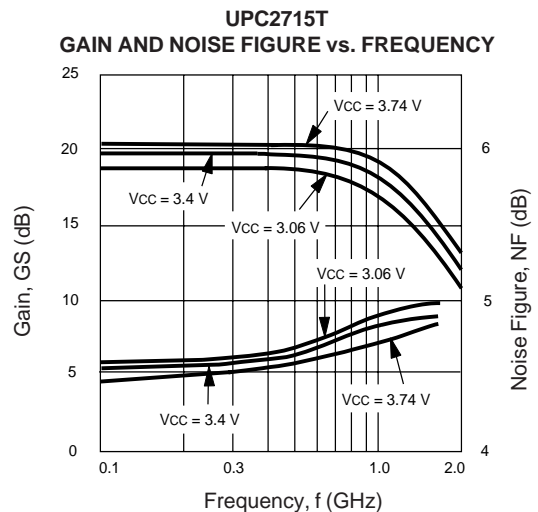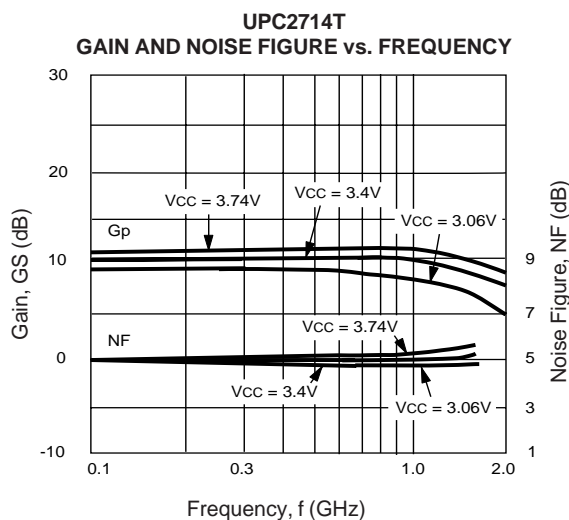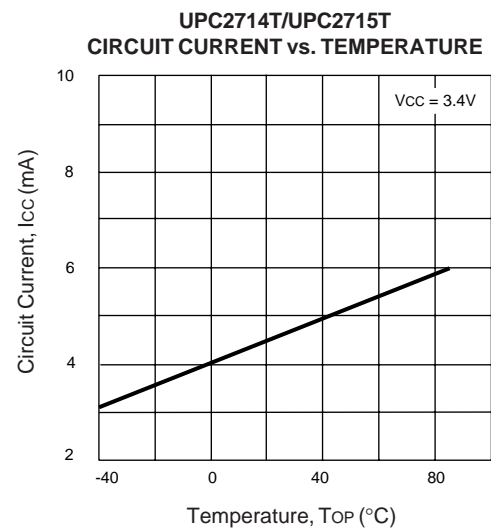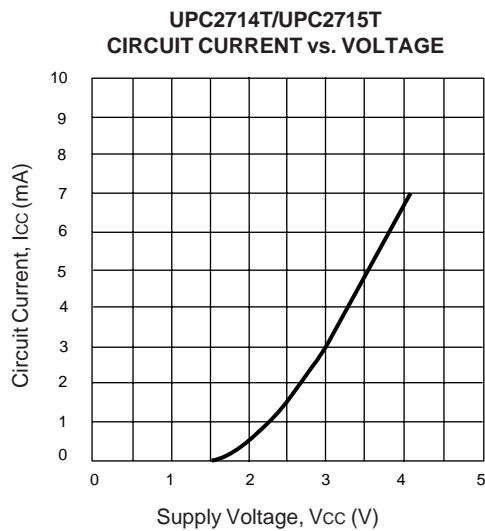


TYPICAL PERFORMANCE CURVES (TA = 25°C, VCC = 3.4 V)


UPC2714T
INPUT RETURN LOSS AND
OUTPUT RETURN LOSS vs. FREQUENCY

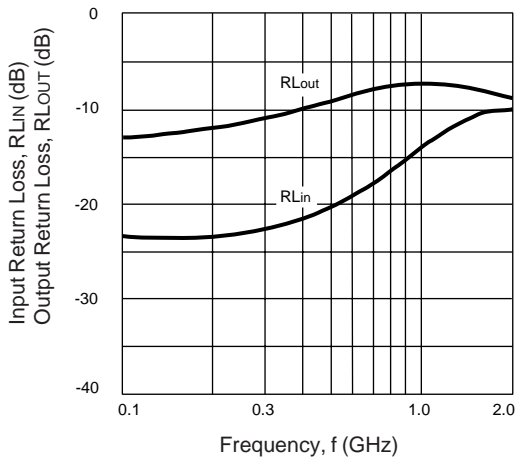


UPC2715T
INPUT RETURN LOSS AND
OUTPUT RETURN LOSS vs. FREQUENCY

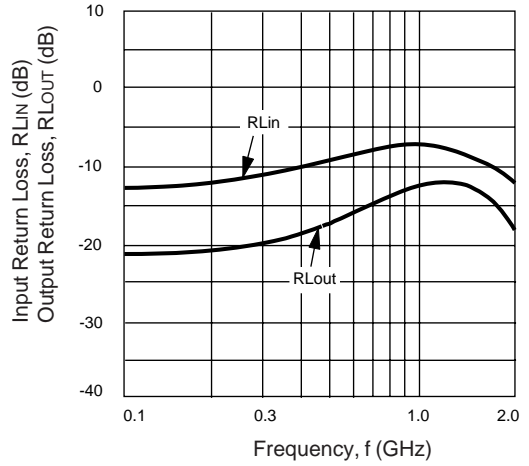


UPC2714T
ISOLATION vs. FREQUENCY

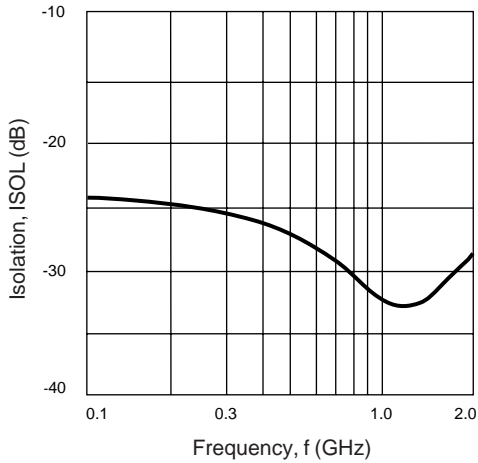


UPC2715T
ISOLATION vs. FREQUENCY

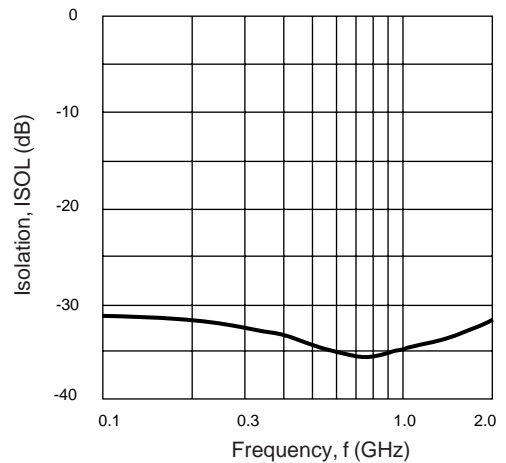

UPC2714T
POWER vs. FREQUENCY

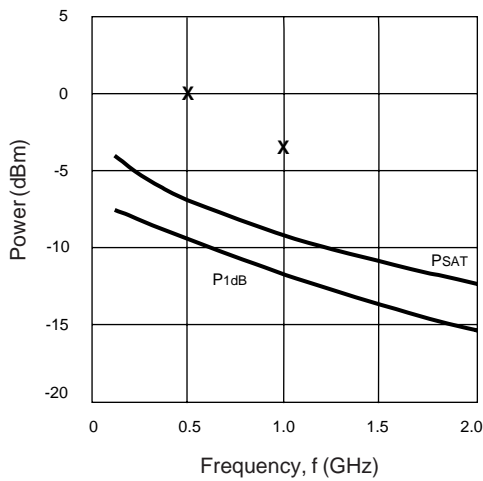






UPC2715T
POWER vs. FREQUENCY

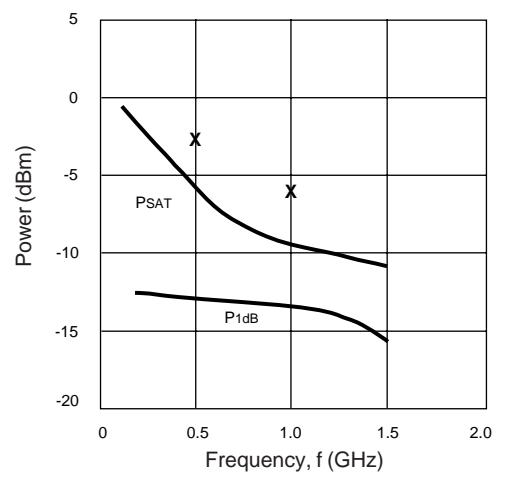


X: Typical SSB Third Order Intercept Point

X: Typical SSB Third Order Intercept Point

TYPICAL PERFORMANCE CURVES (TA = 25°C)

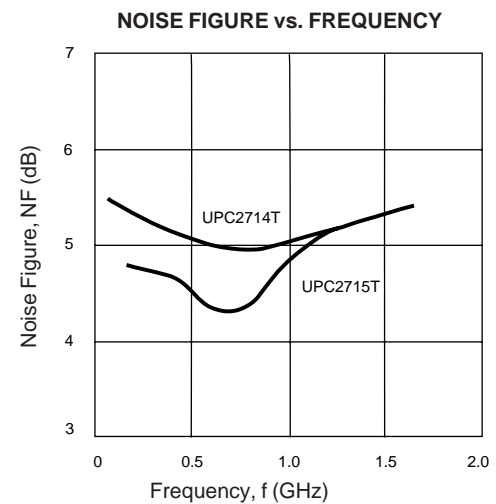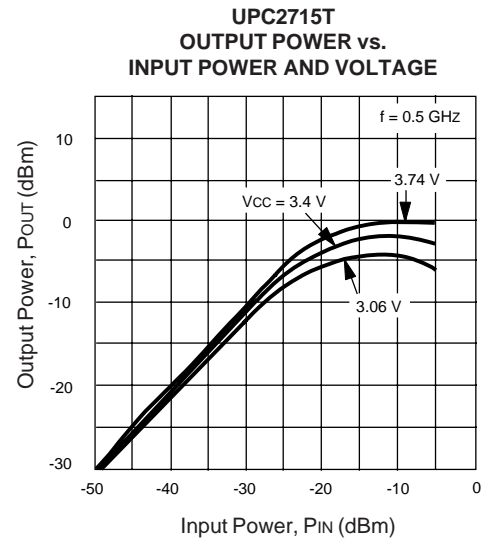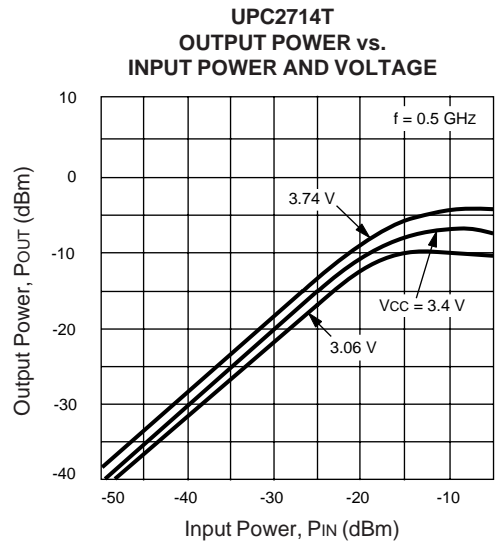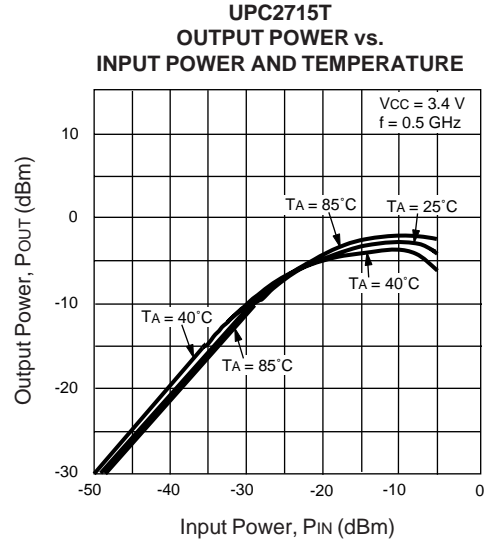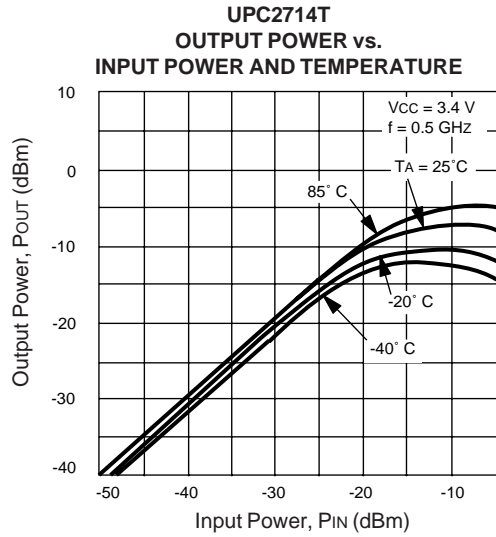

TEST CIRCUIT

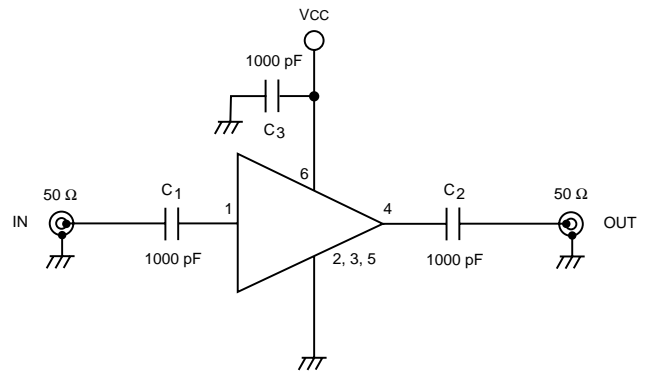

UPC2714T, UPC2715T

TYPICAL SCATTERING PARAMETERS (T_A = 25°C)

UPC2714T

V_{CC} = 3.4 V, I_{CC} = 4.5 mA

FREQUENCY (GHz)	S ₁₁		S ₂₁		S ₁₂		S ₂₂		K ¹	S ₂₁ (dB)
	MAG	ANG	MAG	ANG	MAG	ANG	MAG	ANG		
0.10	0.123	-169.9	3.6	-6.4	0.069	-12.0	0.190	13.3	2.04	11.2
0.20	0.133	167.3	3.7	-19.2	0.061	-24.5	0.266	8.7	2.17	11.3
0.30	0.139	150.5	3.7	-30.6	0.056	-32.7	0.326	2.9	2.25	11.4
0.40	0.151	135.1	3.8	-41.8	0.048	-42.9	0.366	-4.0	2.49	11.5
0.50	0.165	120.6	3.8	-53.2	0.040	-48.8	0.394	-11.1	2.86	11.5
0.60	0.176	105.6	3.7	-64.7	0.035	-53.4	0.414	-19.4	3.19	11.4
0.70	0.187	91.5	3.7	-76.3	0.031	-52.7	0.429	-27.3	3.55	11.4
0.80	0.197	77.8	3.7	-87.9	0.025	-51.7	0.436	-35.3	4.36	11.3
0.90	0.205	64.6	3.6	-99.5	0.024	-47.1	0.439	-43.2	4.60	11.1
1.00	0.215	51.9	3.5	-111.1	0.022	-43.5	0.439	-50.6	5.08	11.0
1.10	0.219	39.2	3.4	-122.5	0.023	-38.2	0.432	-58.0	5.00	10.8
1.20	0.225	28.3	3.3	-133.8	0.024	-32.0	0.422	-64.8	4.96	10.5
1.30	0.228	17.3	3.2	-145.0	0.025	-31.8	0.412	-71.4	4.97	10.2
1.40	0.231	6.6	3.1	-156.1	0.026	-31.7	0.400	-77.8	5.01	9.8
1.50	0.231	-2.8	3.0	-166.8	0.028	-31.4	0.387	-83.4	4.90	9.5
1.60	0.232	-12.7	2.9	-177.4	0.029	-34.1	0.374	-88.9	4.97	9.1
1.70	0.231	-21.3	2.7	172.2	0.030	-36.7	0.359	-94.1	5.11	8.7
1.80	0.229	-29.4	2.6	162.0	0.032	-37.1	0.348	-98.5	5.08	8.3
1.90	0.226	-38.0	2.5	151.9	0.033	-40.2	0.335	-103.2	5.20	7.9
2.00	0.223	-44.8	2.4	142.3	0.035	-41.0	0.322	-107.4	5.21	7.5
2.10	0.216	-51.3	2.2	132.3	0.036	-47.1	0.311	-111.5	5.39	7.0
2.20	0.212	-57.8	2.1	122.8	0.037	-49.4	0.298	-115.3	5.57	6.6
2.30	0.208	-63.4	2.0	113.7	0.039	-52.7	0.287	-118.9	5.61	6.2
2.40	0.204	-68.2	1.9	104.6	0.040	-58.2	0.276	-122.2	5.81	5.7
2.50	0.201	-72.9	1.8	95.6	0.041	-58.7	0.270	-125.7	5.97	5.3

UPC2715T

V_{CC} = 3.4 V, I_{CC} = 4.5 mA


FREQUENCY (GHz)	S ₁₁		S ₂₁		S ₁₂		S ₂₂		K ¹	S ₂₁ (dB)
	MAG	ANG	MAG	ANG	MAG	ANG	MAG	ANG		
0.10	0.052	33.7	7.7	-8.4	0.031	-7.8	0.254	8.1	2.07	17.7
0.20	0.087	21.3	7.8	-25.7	0.028	-12.6	0.279	3.6	2.20	17.8
0.30	0.121	9.5	7.9	-40.9	0.025	-17.8	0.311	-1.0	2.35	17.9
0.40	0.141	-2.1	7.9	-55.9	0.022	-20.3	0.351	-6.4	2.54	18.0
0.50	0.159	-12.4	7.9	-69.5	0.020	-21.2	0.383	-13.0	2.68	18.0
0.60	0.175	-27.8	7.7	-84.9	0.019	-19.7	0.409	-21.3	2.79	17.7
0.70	0.181	-40.7	7.4	-98.4	0.019	-15.7	0.426	-30.2	2.82	17.4
0.80	0.184	-52.3	7.2	-112.0	0.019	-13.3	0.432	-39.1	2.87	17.2
0.90	0.187	-66.1	6.9	-125.6	0.020	-12.3	0.432	-48.1	2.83	16.8
1.00	0.187	-78.4	6.6	-138.9	0.021	-11.2	0.426	-56.3	2.85	16.4
1.10	0.186	-89.3	6.3	-150.8	0.022	-11.6	0.412	-64.2	2.87	16.0
1.20	0.182	-101.5	6.1	-162.7	0.023	-12.1	0.394	-71.2	2.93	15.6
1.30	0.178	-113.8	5.7	-174.5	0.024	-14.5	0.377	-77.5	3.06	15.0
1.40	0.173	-125.4	5.3	174.3	0.025	-16.3	0.359	-83.4	3.22	14.4
1.50	0.167	-137.1	4.9	163.7	0.026	-18.3	0.343	-88.3	3.35	13.9
1.60	0.163	-148.4	4.6	153.2	0.027	-20.6	0.328	-93.1	3.53	13.2
1.70	0.157	-160.0	4.2	143.1	0.028	-22.2	0.315	-97.2	3.72	12.5
1.80	0.152	-171.6	3.9	133.2	0.029	-23.9	0.306	-100.8	3.90	11.9
1.90	0.148	176.8	3.7	123.5	0.030	-25.6	0.296	-104.7	4.07	11.3
2.00	0.142	164.7	3.4	114.5	0.031	-27.1	0.286	-108.9	4.28	10.6

Note:

1. K factor calculations:
$$K = \frac{1 + |\Delta|^2 - |S_{11}|^2 - |S_{22}|^2}{2 |S_{12} S_{21}|}$$
, $\Delta = S_{11} S_{22} - S_{21} S_{12}$


UPC2714T, UPC2715T

EQUIVALENT CIRCUIT

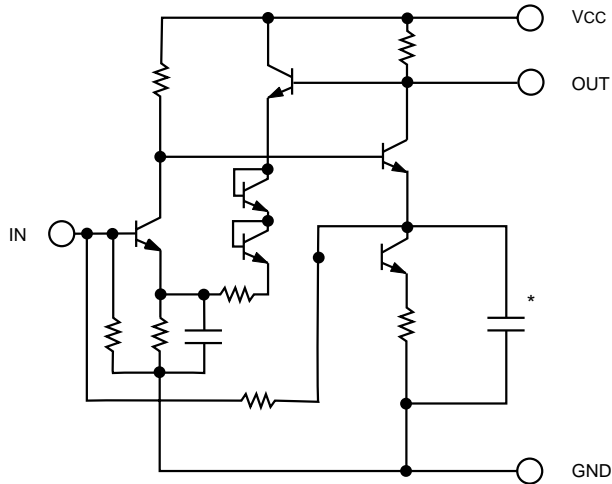

*Used in UPC2714T only


LEAD CONNECTIONS

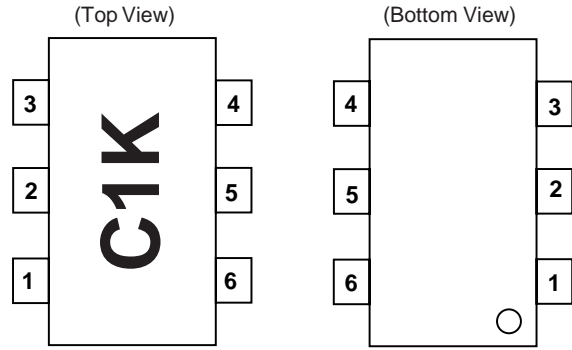

1. INPUT
2. GND
3. GND
4. OUTPUT
5. GND
6. Vcc

Note: Package Markings:
C1K - UPC2714T
C1L - UPC2715T

OUTLINE DIMENSIONS (Units in mm)

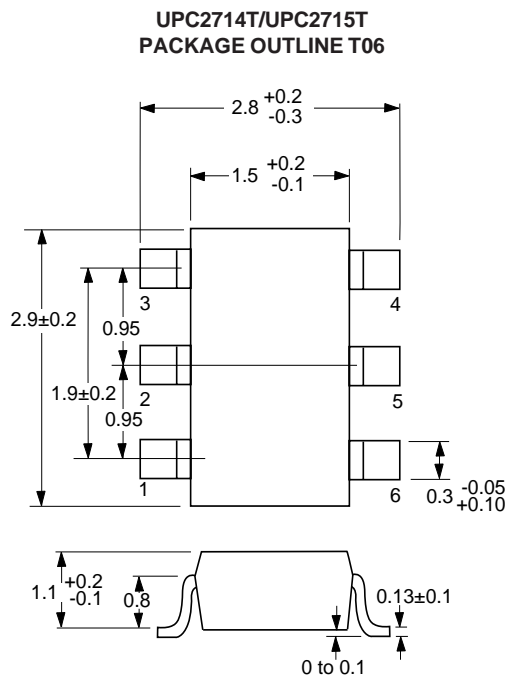


Note:
All dimensions are typical unless otherwise noted.

ORDERING INFORMATION

PART NUMBER	QTY
UPC2714T-E3	3K/Reel
UPC2715T-E3	3K/Reel

Embossed Tape, 8 mm wide.
Pins 1, 2, 3 are in tape pull-out direction.

RECOMMENDED P.C.B. LAYOUT (Units in mm)

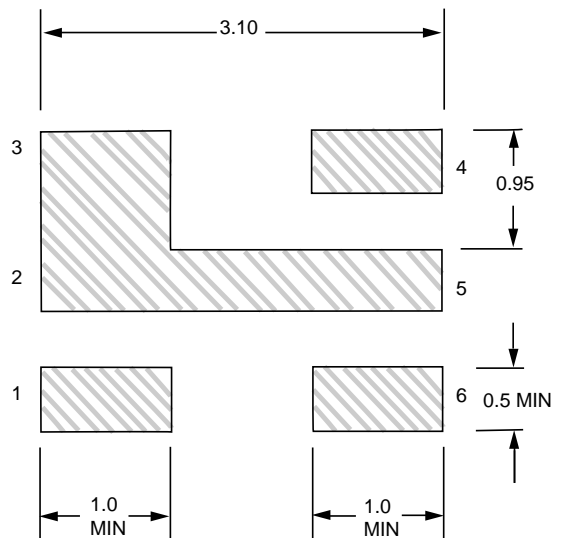

EXCLUSIVE NORTH AMERICAN AGENT FOR **NEC** RF, MICROWAVE & OPTOELECTRONIC SEMICONDUCTORS

CEL CALIFORNIA EASTERN LABORATORIES • Headquarters • 4590 Patrick Henry Drive • Santa Clara, CA 95054-1817 • (408) 988-3500 • Telex 34-6393 • FAX (408) 988-0279

24-Hour Fax-On-Demand: 800-390-3232 (U.S. and Canada only) • Internet: <http://WWW.CEL.COM>

DATA SUBJECT TO CHANGE WITHOUT NOTICE

PRINTED IN USA ON RECYCLED PAPER -11/97