



## Surface Mount End-Banded Chip Thermistors 1206 Style

### Company Information

- [About U. S. Sensor](#)
- [Mission Statement](#)
- [Newsletter](#)
- [Employment Opportunities](#)

### Product Guide

- [NTC Thermistors](#)
- [NTC Probes & Assemblies](#)
- [RTD's](#)
- [RTD's Probes & Assemblies](#)

### Technical Data

- [What is a thermistor](#)
- [Terminology](#)
- [Manufacturing Quality](#)

### Markets and Applications

### Find a Sales Rep/ Distributor

### Contact Us

### Home

### U.S. Sensor

1832 W. Collins Ave  
Orange, CA 92867  
Tel: 800-777-6467  
Tel: 714-639-1000  
Fax: 714-639-1220

Email: [sales@ussensor.com](mailto:sales@ussensor.com)


U.S. Sensor's surface mount end-banded thermistor elements are designed for use on hybrid substrates, integrated circuits or printed circuit boards. They have a solder coated metallization which is suitable for various contact techniques including wire bond, epoxy or solder. Since they are manufactured using the most advanced equipment and technology available, their dimensional parameters are extremely uniform making the devices especially suitable for use with automatic handling and placement equipment.

### Features

- Surface mountable
- Small size
- Low cost
- Nickel Barrier
- Rated to 125°C operating temperature

### Options

- Non-standard resistance values and tolerances
- Special electrode materials
- Special dimensions
- Tape and reel packaging
- Solder coated metallization

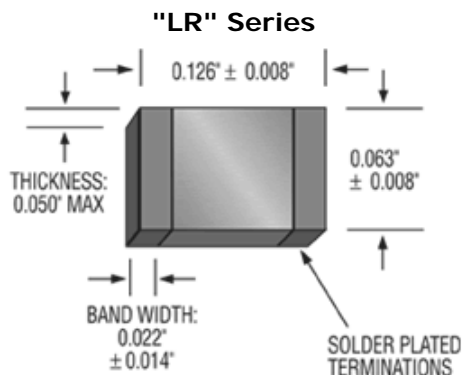

[View Photo](#)

### Specifications

- Thermal time constant: 10 seconds max
- Dissipation constant: 1 mW/°C

### SURFACE MOUNT END BANDED CHIP THERMISTORS 1206 STYLE (125°C)

Part Number	Resistance Ohms @25°C	* Resistance Tol. ± %	Beta (K) 0-50°C	View R-T Chart
LR501D0J	500	5	3250	<a href="#">View R-T Chart</a>
LR102D0J	1000	5	3250	<a href="#">View R-T Chart</a>
LR252L0J	2500	5	4100	<a href="#">View R-T Chart</a>
LR502F0J	5000	5	3550	<a href="#">View R-T Chart</a>
LR103G0J	10000	5	3750	<a href="#">View R-T Chart</a>
LR303K0J	30000	5	4000	<a href="#">View R-T Chart</a>
LR503K0J	50000	5	4000	<a href="#">View R-T Chart</a>
LR104R0J	100000	5	4250	<a href="#">View R-T Chart</a>
LR204R0J	200000	5	4250	<a href="#">View R-T Chart</a>
LR504V0J	500000	5	4350	<a href="#">View R-T Chart</a>

\* Resistance tolerances ± 1%, 2%, 3% and 10% are available upon request