




- ▼ Simple Drive Requirement
- ▼ Low On-resistance
- ▼ Fast Switching Characteristic




$BV_{DSS}$	-30V
$R_{DS(ON)}$	14mΩ
$I_D$	-10.7A

## Description

The Advanced Power MOSFETs from APEC provide the designer with the best combination of fast switching, ruggedized device design, low on-resistance and cost-effectiveness.

The SO-8 package is universally preferred for all commercial-industrial surface mount applications and suited for low voltage applications such as DC/DC converters.



## Absolute Maximum Ratings

Symbol	Parameter	Rating	Units
$V_{DS}$	Drain-Source Voltage	-30	V
$V_{GS}$	Gate-Source Voltage	$\pm 25$	V
$I_D @ T_A=25^\circ C$	Continuous Drain Current <sup>3</sup>	-10.7	A
$I_D @ T_A=70^\circ C$	Continuous Drain Current <sup>3</sup>	-8.6	A
$I_{DM}$	Pulsed Drain Current <sup>1</sup>	-50	A
$P_D @ T_A=25^\circ C$	Total Power Dissipation	2.5	W
	Linear Derating Factor	0.02	W/ $^\circ C$
$T_{STG}$	Storage Temperature Range	-55 to 150	$^\circ C$
$T_J$	Operating Junction Temperature Range	-55 to 150	$^\circ C$

## Thermal Data

Symbol	Parameter	Value	Unit
$R_{thj-a}$	Thermal Resistance Junction-ambient <sup>3</sup>	Max. 50	$^\circ C/W$



### Electrical Characteristics@ $T_j=25^\circ\text{C}$ (unless otherwise specified)

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Units
$\text{BV}_{\text{DSS}}$	Drain-Source Breakdown Voltage	$V_{\text{GS}}=0\text{V}$ , $I_{\text{D}}=-250\mu\text{A}$	-30	-	-	V
$\Delta \text{BV}_{\text{DSS}}/\Delta T_j$	Breakdown Voltage Temperature Coefficient	Reference to $25^\circ\text{C}$ , $I_{\text{D}}=-1\text{mA}$	-	-0.015	-	$\text{V}/^\circ\text{C}$
$R_{\text{DS(ON)}}$	Static Drain-Source On-Resistance <sup>2</sup>	$V_{\text{GS}}=-10\text{V}$ , $I_{\text{D}}=-10\text{A}$	-	-	14	$\text{m}\Omega$
		$V_{\text{GS}}=-4.5\text{V}$ , $I_{\text{D}}=-5\text{A}$	-	-	20	$\text{m}\Omega$
$V_{\text{GS(th)}}$	Gate Threshold Voltage	$V_{\text{DS}}=V_{\text{GS}}$ , $I_{\text{D}}=-250\mu\text{A}$	-1	-	-3	V
$g_{\text{fs}}$	Forward Transconductance	$V_{\text{DS}}=-10\text{V}$ , $I_{\text{D}}=-10\text{A}$	-	13	-	S
$I_{\text{DSS}}$	Drain-Source Leakage Current ( $T_j=25^\circ\text{C}$ )	$V_{\text{DS}}=-30\text{V}$ , $V_{\text{GS}}=0\text{V}$	-	-	-1	$\text{uA}$
	Drain-Source Leakage Current ( $T_j=70^\circ\text{C}$ )	$V_{\text{DS}}=-24\text{V}$ , $V_{\text{GS}}=0\text{V}$	-	-	-25	$\text{uA}$
$I_{\text{GSS}}$	Gate-Source Leakage	$V_{\text{GS}}= \pm 25\text{V}$	-	-	$\pm 100$	$\text{nA}$
$Q_g$	Total Gate Charge <sup>2</sup>	$I_{\text{D}}=-10.7\text{A}$	-	29	46	nC
$Q_{\text{gs}}$	Gate-Source Charge	$V_{\text{DS}}=-24\text{V}$	-	6	-	nC
$Q_{\text{gd}}$	Gate-Drain ("Miller") Charge	$V_{\text{GS}}=-4.5\text{V}$	-	14	-	nC
$t_{\text{d(on)}}$	Turn-on Delay Time <sup>2</sup>	$V_{\text{DS}}=-15\text{V}$	-	15	-	ns
$t_r$	Rise Time	$I_{\text{D}}=-1\text{A}$	-	12	-	ns
$t_{\text{d(off)}}$	Turn-off Delay Time	$R_G=3.3\Omega$ , $V_{\text{GS}}=-10\text{V}$	-	100	-	ns
$t_f$	Fall Time	$R_D=15\Omega$	-	70	-	ns
$C_{\text{iss}}$	Input Capacitance	$V_{\text{GS}}=0\text{V}$	-	2600	4100	pF
$C_{\text{oss}}$	Output Capacitance	$V_{\text{DS}}=-25\text{V}$	-	500	-	pF
$C_{\text{rss}}$	Reverse Transfer Capacitance	f=1.0MHz	-	370	-	pF

### Source-Drain Diode


Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Units
$V_{\text{SD}}$	Forward On Voltage <sup>2</sup>	$I_{\text{S}}=-10.7\text{A}$ , $V_{\text{GS}}=0\text{V}$	-	-	-1.2	V
$t_{\text{rr}}$	Reverse Recovery Time	$I_{\text{S}}=-10.7\text{A}$ , $V_{\text{GS}}=0\text{V}$ ,	-	31	-	ns
$Q_{\text{rr}}$	Reverse Recovery Charge	$dI/dt=100\text{A}/\mu\text{s}$	-	25	-	nC

### Notes:


- 1.Pulse width limited by Max. junction temperature.
- 2.Pulse width  $\leq 300\mu\text{s}$  , duty cycle  $\leq 2\%$ .
- 3.Surface mounted on 1 in<sup>2</sup> copper pad of FR4 board ;  $125^\circ\text{C}/\text{W}$  when mounted on min. copper pad.




**AP4407GM**

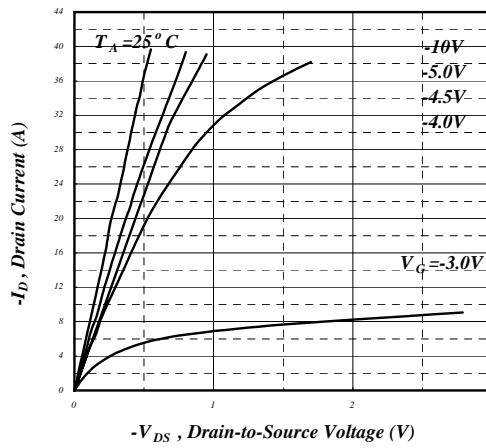


**Fig 1. Typical Output Characteristics**

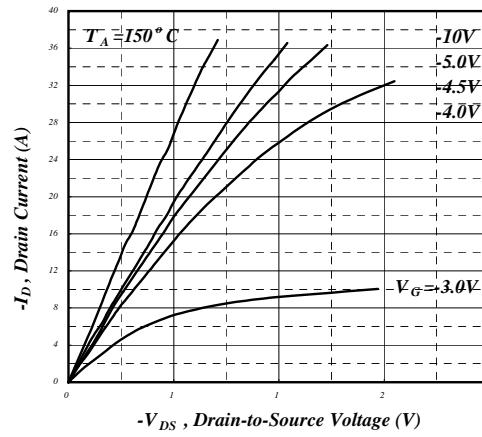


**Fig 2. Typical Output Characteristics**

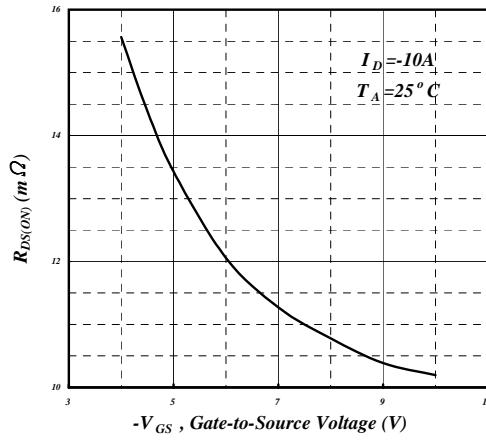


**Fig 3. On-Resistance v.s. Gate Voltage**

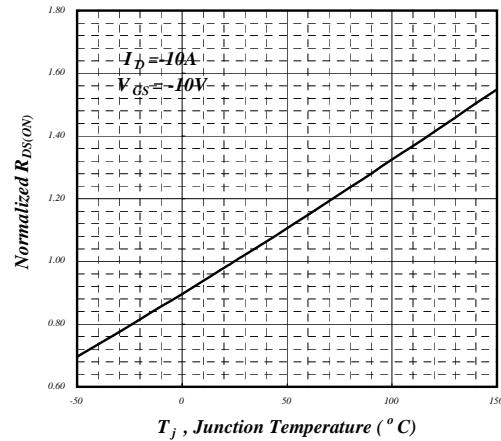

**Fig 4. Normalized On-Resistance v.s. Junction Temperature**

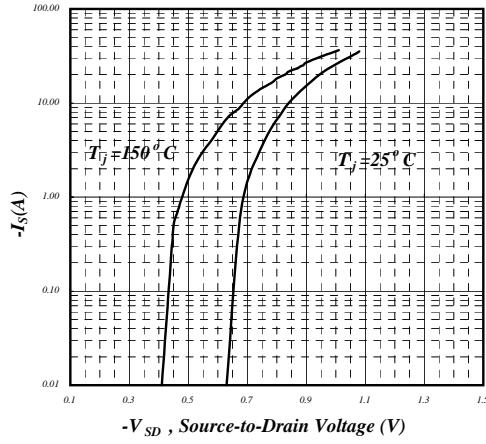

**Fig 5. Forward Characteristic of Reverse Diode**

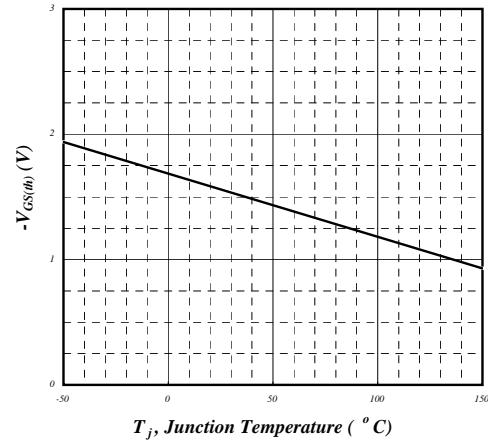

**Fig 6. Gate Threshold Voltage v.s. Junction Temperature**

# AP4407GM

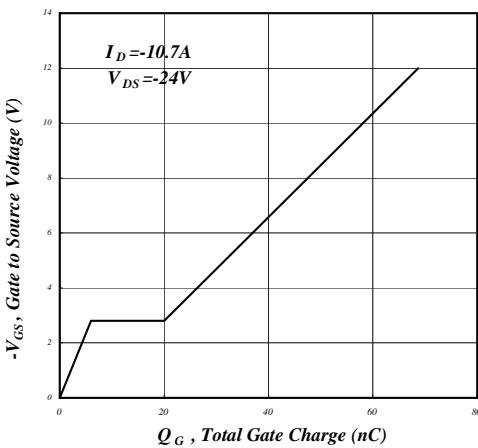


Fig 7. Gate Charge Characteristics

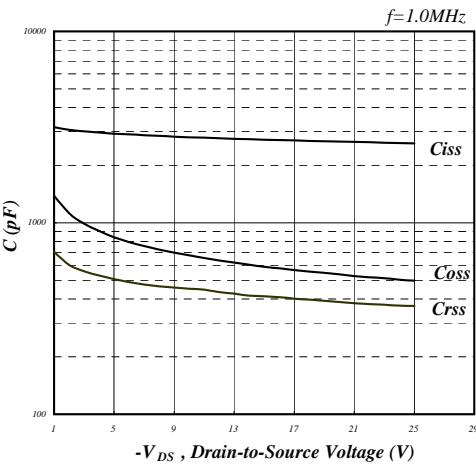


Fig 8. Typical Capacitance Characteristics

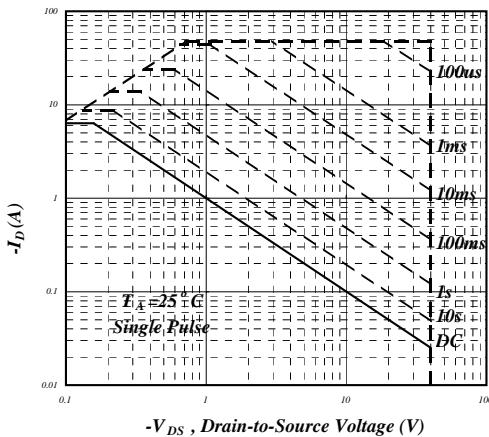


Fig 9. Maximum Safe Operating Area

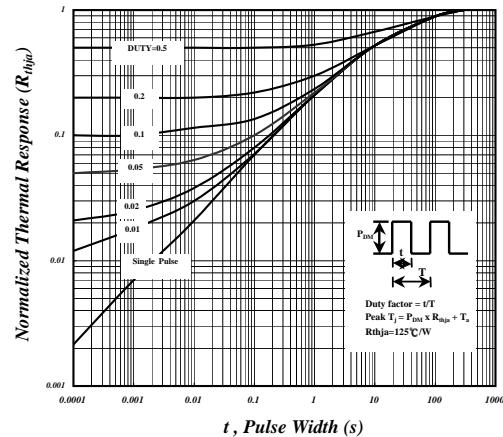


Fig 10. Effective Transient Thermal Impedance

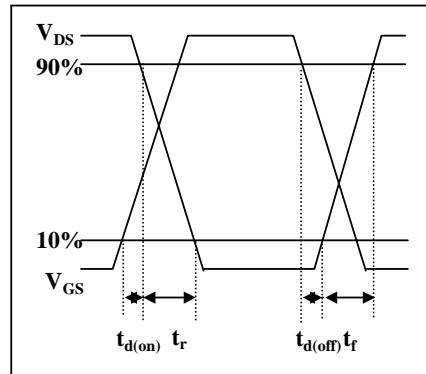


Fig 11. Switching Time Waveform

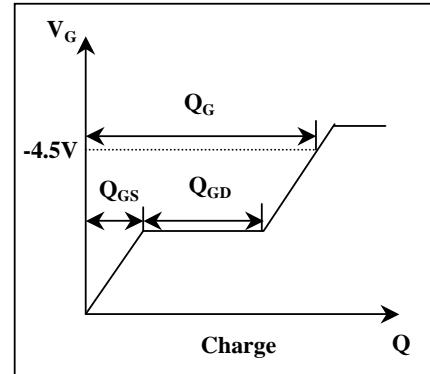


Fig 12. Gate Charge Waveform