



# TSC2411

## General Purpose NPN Transistor

SOT-23



Pin assignment:  
 1. Base  
 2. Emitter  
 3. Collector

**BV<sub>CBO</sub> = 40V****I<sub>c</sub> = 600mA****V<sub>CE(SAT)</sub> = 0.2V(typ.) @ I<sub>c</sub> / I<sub>b</sub> = 500mA / 50mA****Features**

- ✧ Driver stage of AF amplifier.
- ✧ General purpose switching application

**Structure**

- ✧ Epitaxial planar type.
- ✧ Complementary to TSA1036CX

**Ordering Information**

Part No.	Packing	Package	Marking
TSC2411CX	3kpcs / Reel	SOT-23	2X

**Absolute Maximum Rating (Ta = 25 °C unless otherwise noted)**

Parameter	Symbol	Limit	Unit
Collector-Base Voltage	V <sub>CBO</sub>	60V	V
Collector-Emitter Voltage	V <sub>CEO</sub>	40V	V
Emitter-Base Voltage	V <sub>EBO</sub>	6	V
Collector Current	I <sub>c</sub>	0.6	A
Collector Power Dissipation	P <sub>D</sub>	225	mW
Operating Junction Temperature	T <sub>J</sub>	+150	°C
Operating Junction and Storage Temperature Range	T <sub>STG</sub>	-55 to +150	°C

Note: 1. Single pulse, P<sub>w</sub> = 380uS, Duty <= 2%**Electrical Characteristics**

Ta = 25 °C unless otherwise noted

Parameter	Conditions	Symbol	Min	Typ	Max	Unit
<b>Static</b>						
Collector-Base Voltage	I <sub>c</sub> = 100uA, I <sub>e</sub> = 0	BV <sub>CBO</sub>	60	--	--	V
Collector-Emitter Breakdown Voltage	I <sub>c</sub> = 1mA, I <sub>b</sub> = 0	BV <sub>CEO</sub>	40	--	--	V
Emitter-Base Breakdown Voltage	I <sub>e</sub> = 10uA, I <sub>c</sub> = 0	BV <sub>EBO</sub>	6	--	--	V
Collector Cutoff Current	V <sub>CB</sub> = 20V, I <sub>e</sub> = 0	I <sub>CBO</sub>	--	--	0.1	uA
Emitter Cutoff Current	V <sub>EB</sub> = 4V, I <sub>c</sub> = 0	I <sub>EBO</sub>	--	--	0.1	uA
Collector-Emitter Saturation Voltage	I <sub>c</sub> / I <sub>b</sub> = 150mA / 15mA	V <sub>CE(SAT)1</sub>	--	--	0.4	V
Collector-Emitter Saturation Voltage	I <sub>c</sub> / I <sub>b</sub> = 500mA / 50mA	V <sub>CE(SAT)2</sub>	--	0.20	0.75	V
DC Current Transfer Ratio	V <sub>CE</sub> = 1V, I <sub>c</sub> = 0.15A	h <sub>FE</sub>	82	--	390	
Transition Frequency	V <sub>CE</sub> = 10V, I <sub>c</sub> = 20mA, f = 100MHz	f <sub>T</sub>	--	250	--	MHz
Output Capacitance	V <sub>CB</sub> = 5V, f = 1MHz	C <sub>OB</sub>	--	--	6.5	pF


Note : pulse test: pulse width &lt;= 380uS, duty cycle &lt;= 2%

**Classification Of h<sub>FE</sub>**


Rank	P	Q	R	
Range	82 - 180	120 - 270	180 - 390	

## Electrical Characteristics Curve


**Figure 1. Current Gain vs Collector Current**

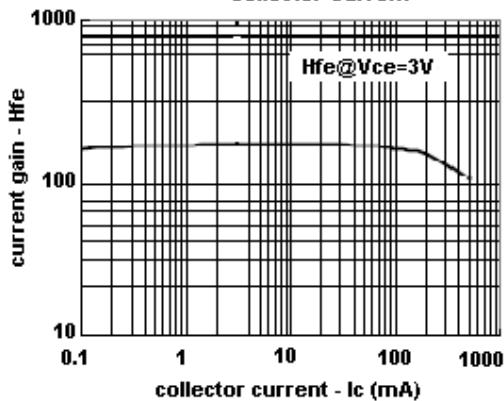


**Figure 2. Saturation Voltage vs Collector Current**

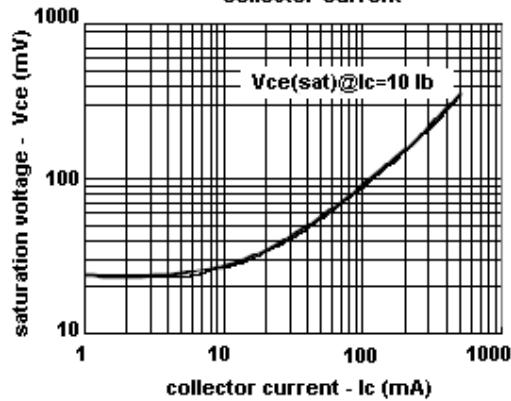


**Figure 3. Saturation Voltage vs Collector Current**

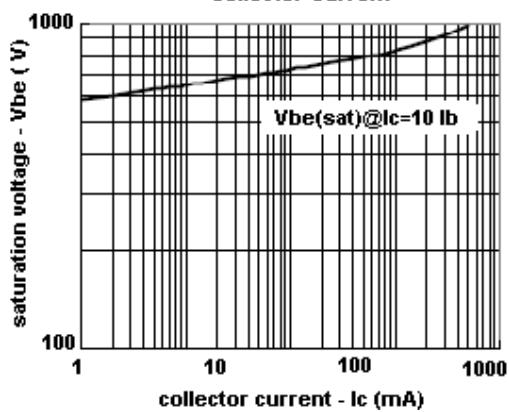


**Figure 4. Power Derating Curves**

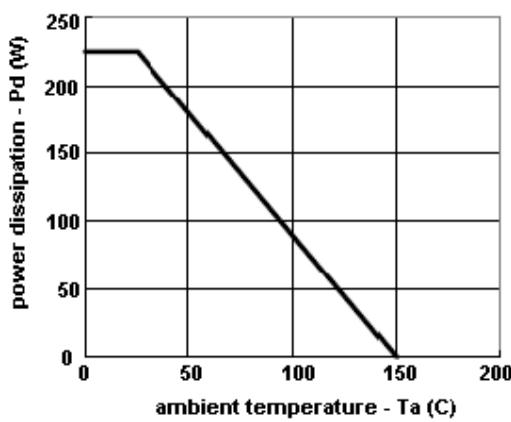

**Figure 5. Cutoff Frequency vs Collector Current**

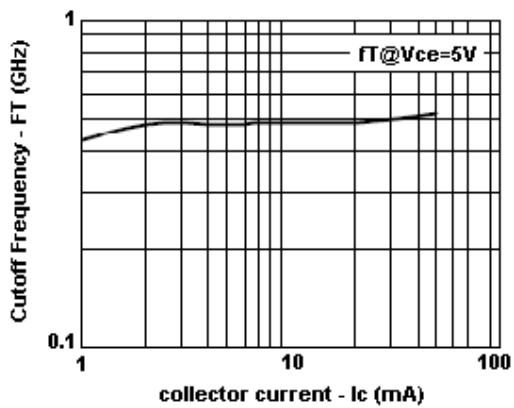

## SOT-23 Mechanical Drawing

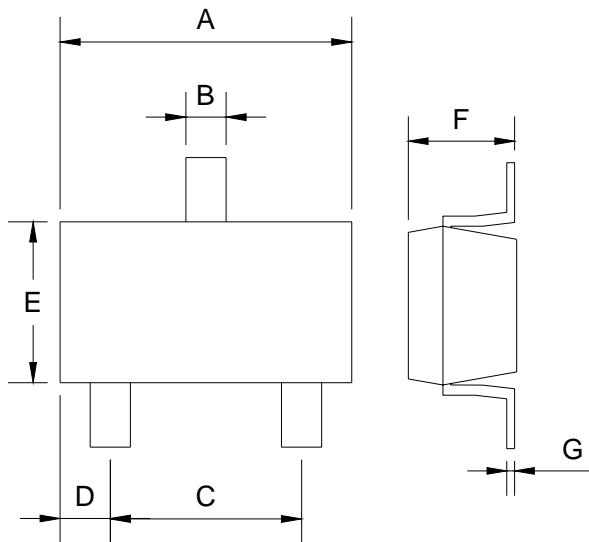

SOT-23 DIMENSION				
DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	2.80	3.04	0.110	0.120
B	0.30	0.50	0.012	0.020
C	1.70	2.30	0.067	0.091
D	0.25	0.65	0.010	0.026
E	1.2	1.60	0.047	0.063
F	0.89	1.30	0.035	0.051
G	0.08	0.17	0.003	0.006