
## EPM121 Series **Piezo Ceramic Transducers**

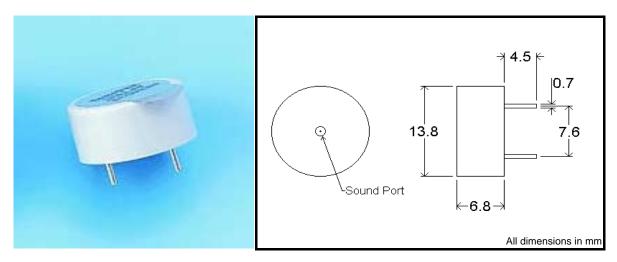

## **Features**

Small diameter piezo ceramic transducers **High output** Wide frequency response Low power consumption (2mA @ 5V p-p) Fully sealed on underside, with tape seal (WPT version)

## **Specification**

	EPM121A0A	EPM121A1AWPT
Operating Voltage Range	2 - 20 V p-p	
Min SPL @ 10cm, 5V p-p Sq. wave	80 dB	75 dB
Static Capacitance, +/- 30%	17000 pF	14000 pF
Resonant Frequency	4096 Hz	
Operating Temperature	-20 ~ +70 degC	
Storage Temperature	-30 ~ +80 degC	
Sealed for washing	No	Yes





## **Deltron Roxburgh Ltd**

Roxburgh House, Foxhills Ind. Park, Scunthorpe, N.Lincs, DN15 8QJ Sales tel. 01724 408899 Fax: 01724 281650 E-mail: sales@deltron-roxburgh.com

Visit us at: www.deltron-roxburgh.com