


10/100Base-TX Interface Module with Enhanced Common Mode Attenuation

EPF8188G




- Recommended for use with SSI578Q2120 Chip (when connected per appropriate schematic)
- Guaranteed to operate with 8 mA DC Bias at 70°C
- Complies with or exceeds IEEE 802.3, 10/100Base-TX Standards

Electrical Parameters @ 25° C


OCL @ 70°C	Insertion Loss (dB Max.)			Return Loss (dB Min.)			Common Mode Rejection (dB Min.)				Crosstalk* (dB Min.)
	1-80 MHz	80-100 MHz	150 MHz	1-30 MHz	30-60 MHz	60-80 MHz	1-30 MHz	30-100 MHz	100-200 MHz	200-500 MHz	
100 KHz, 0.1 Vrms 8 mA DC Bias	1-80 MHz	80-100 MHz	150 MHz	1-30 MHz	30-60 MHz	60-80 MHz	1-30 MHz	30-100 MHz	100-200 MHz	200-500 MHz	1-100 MHz
Cable Side	Xmit/Rcv	Xmit/Rcv	Xmit/Rcv	Xmit/Rcv	Xmit/Rcv	Xmit/Rcv	Xmit/Rcv	Xmit/Rcv	Xmit/Rcv	Xmit/Rcv	Xmit/Rcv
350 μH	-1/-1	-1/-1	-3.5/-3	-18/-18	-14/-14	-10/-10	-45/-45	-35/-35	-30/-20	-10/-10	-35

• Isolation : 1500 Vrms • Impedance : 100 Ω • Rise Time : 3.0 nS Max. • Crosstalk : Between Channels •

Schematic

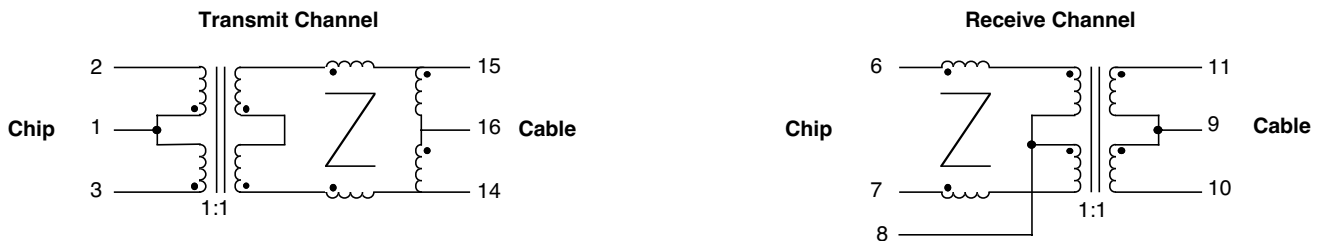

Package

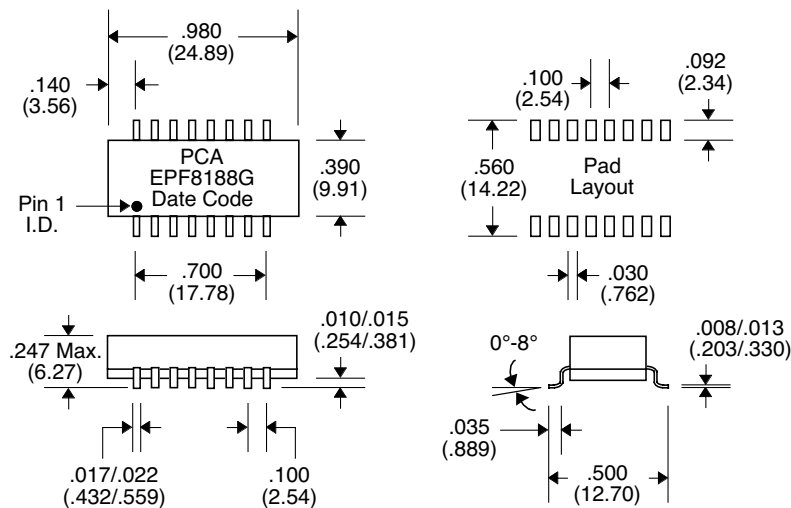

Unless Otherwise Specified Dimensions are in Inches /mm ±.010 /.25