


10/100Base-TX Module for Quad-Port Applications

EPF8124S




- Recommended for use with SEEQ 84220 Chip
- Designed for Dual Stacked RJ-45 Connector
- Significantly Improved Common Mode Attenuation
- Guaranteed to operate with 8 mA DC Bias at 70°C
- Complies with or exceeds IEEE 802.3, 10/100Base-TX Standards

Electrical Parameters @ 25° C


OCL @ 70°C	Insertion Loss (dB Max.)		Return Loss (dB Min.)			Common Mode Rejection (dB Min.)				Crosstalk (dB Min.)
	1-100 MHz	150 MHz	1-30 MHz	60 MHz	100 MHz	30-100 MHz	200 MHz	300 MHz	500 MHz	
100 KHz, 0.1 Vrms 8 mA DC Bias										
Media Side	Xmit/Rcv	Xmit/Rcv	Xmit/Rcv	Xmit/Rcv	Xmit/Rcv	Xmit/Rcv	Xmit/Rcv	Xmit/Rcv	Xmit/Rcv	
350 μ H	-1/-1	-3/-3	-18/-18	-12/-12	-10/-10	-30/-20	-20/-20	-20/-10	-10/---	-30

• Isolation : 1500 Vrms • Impedance : 100 Ω • Rise Time : 3.0 nS Max. •

Schematic

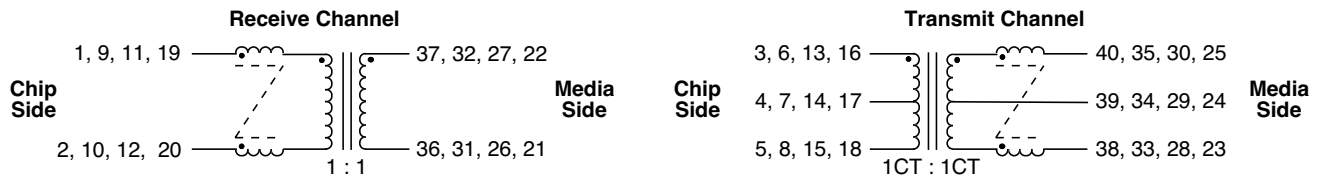

Package

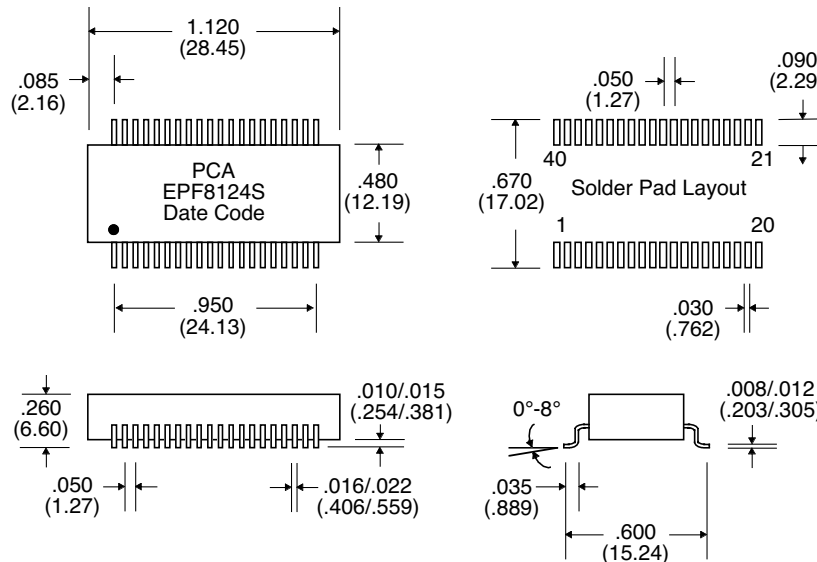

Unless Otherwise Specified Dimensions are in Inches /mm \pm .010 /.25