


# 10/100Base-TX Module for Quad-Port Applications

## EPF8223S




- Guaranteed to operate with 8 mA DC Bias at 70°C
- Complies with or exceeds IEEE 802.3, 10/100Base-TX Standards

### Electrical Parameters @ 25° C


OCL @ 70°C	Insertion Loss (dB Max.)		Return Loss (dB Min.)			Common Mode Rejection (dB Min.)				Crosstalk (dB Min.)
	1-100 MHz	150 MHz	1-30 MHz	50 MHz	60-80 MHz	30-100 MHz	200 MHz	300 MHz	500 MHz	
100 KHz, 0.1 Vrms 8 mA DC Bias										
<b>Cable Side</b>	Xmit/Rcv	Xmit/Rcv	Xmit/Rcv	Xmit/Rcv	Xmit/Rcv	Xmit/Rcv	Xmit/Rcv	Xmit/Rcv	Xmit/Rcv	
350 $\mu$ H	-1/-1	-3/-3	-18/-18	-14/-14	-12/-12	-30/-20	-20/-15	-20/-10	-10/---	-30

• Isolation : 1500 Vrms • Impedance : 100  $\Omega$  • Rise Time : 3.0 nS Max. •

### Schematic

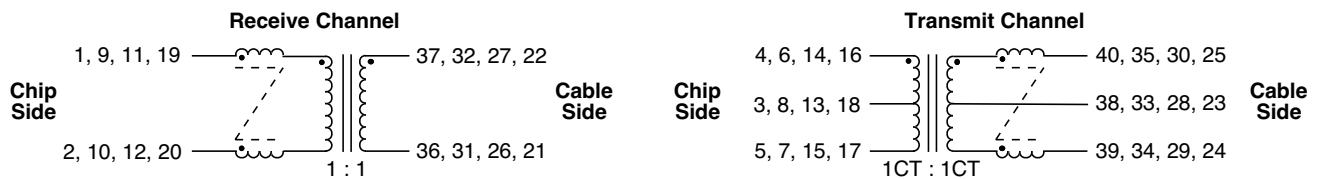

### Package

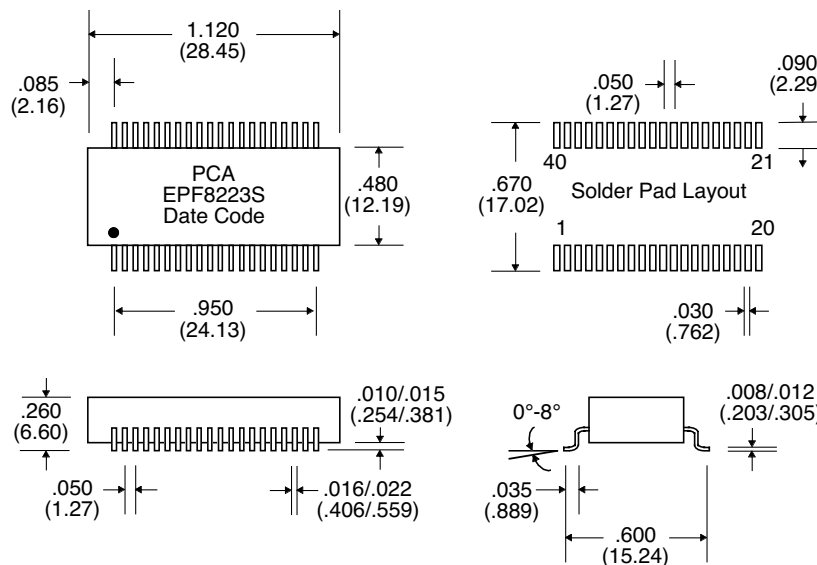

Unless Otherwise Specified Dimensions are in Inches /mm  $\pm$  .010 / .25