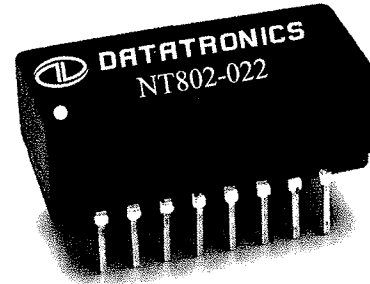



NT802-022
Token Ring Filter Module
Features

- Designed to meet IEEE 802.5 Specification
- Can be used in either transmit or receive channel over UTP cable
- Supports either 4Mbps or 16Mbps transmission
- Industrial standard DIP package
- Supports Texas Instrument TM38054™ and most other LAN adapter Ring interface semiconductors


Electrical Specifications @25°C

Insertion loss									Isolation (Vrms)
(dB Max)				(dB Min)					
1MHz	4MHz	16MHz	24MHz	32MHz	36MHz	44MHz	55MHz	80MHz	500
0.5	0.5	0.8	1.7	7.0	25.0	30.0	20.0	25.0	

Return loss (dB Min)			Common to Common Mode Rejection (dB Min)				Common to Differential Rejection (dB Min)			
1-6MHz	6-17MHz	17-25MHz	1MHz	20MHz	70MHz	200MHz	1MHz	10MHz	30MHz	100MHz
14	12	8	45	30	15	20	60	45	30	25

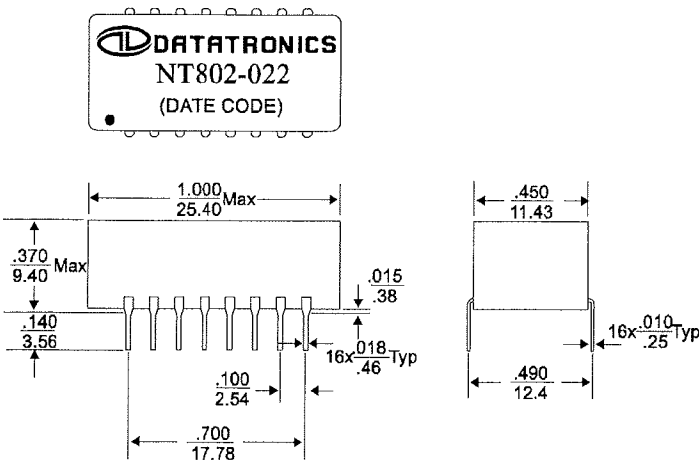Mechanical Outline


Note: 1. All Dimensions are specified in $\frac{\text{Inches}}{\text{mm}}$
 2. Unless Otherwise specified, all tolerances are $\pm \frac{0.01}{0.254}$

Schematic
