


SERIES COM25 AND COM23




- **FEATURES**
 - ULTRA SMALL PACKAGE
 - AVAILABLE IN 5.0 V OR 3.0 V
 - ENABLE/DISABLE FUNCTION
- **SPECIFICATIONS**

SERIES	COM25	COM23	
FREQUENCY RANGE	1.544 MHz TO 125.000 MHz	1.544 MHz TO 156.000 MHz	
FREQUENCY STABILITY†	COM2510 : ±100 ppm	COM2310 : ±100 ppm	
	COM2505 : ±50 ppm	COM2305 : ±50 ppm	
	COM2503 : ±30 ppm	COM2303 : ±30 ppm	
OPERATING TEMPERATURE RANGE	-10° C TO +70° C	-10° C TO +70° C	
STORAGE TEMPERATURE RANGE	-25° C TO +85° C	-25° C TO +85° C	
INPUT	VOLTAGE	+5 VDC ±0.5 VDC	+3.3 VDC ±0.3 VDC
	CURRENT (MAX)	1.544 MHz TO 9.99 MHz: 15 mA MAX 10.00 MHz TO 34.999 MHz: 20 mA MAX 35.00 MHz TO 49.999 MHz: 35 mA MAX 50.00 MHz TO 125.000 MHz: 40 mA MAX	1.544 MHz TO 19.99 MHz: 7 mA MAX 20.00 MHz TO 31.999 MHz: 12 mA MAX 32.00 MHz TO 49.999 MHz: 20 mA MAX 50.00 MHz TO 79.999 MHz: 25 mA MAX 80.00 MHz TO 99.999 MHz: 30 mA MAX 100.00 MHz TO 156.00 MHz: 40 mA MAX
OUTPUT	SYMMETRY	40 TO 60% AT 0.5 VCC	40 TO 60% AT 0.5 VCC
	RISE AND FALL TIME	10 ns MAX	10 ns MAX
	LOGIC "0" LEVEL	VCC X 0.1 V MAX	VCC X 0.1 V MAX
	LOGIC "1" LEVEL	VCC X 0.9 V MIN	VCC X 0.9 V MIN
	LOAD	15 pF	15 pF
ENABLE/DISABLE FUNCTION	PIN 1: HIGH OR OPEN PIN 3: OSCILLATION PIN 1: LOW PIN 3: HIGH IMPEDANCE		
ENABLE/DISABLE TIME	100 ns MAX	150 ns MAX	
STANDBY CURRENT	100 uA MAX (CONTROL=L LEVEL VCC=5.0 V)	100 uA MAX (CONTROL=L LEVEL VCC=3.3 V)	

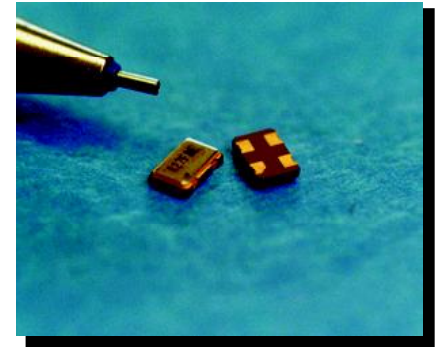


† INCLUSIVE OF 25°C TOLERANCE, OPERATING TEMPERATURE RANGE, VOLTAGE OR LOAD CHANGES, AGING, SHOCK AND VIBRATION


● OUTLINE DRAWING

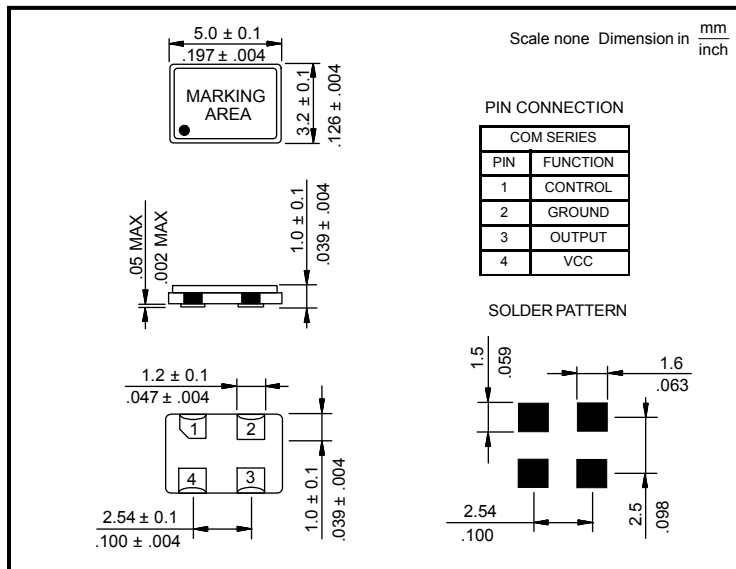

● REFLOW SOLDERING PROFILE

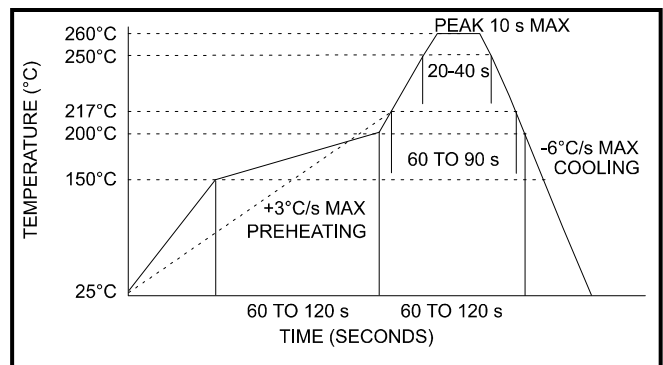

● CARRIER TAPE DIMENSIONS

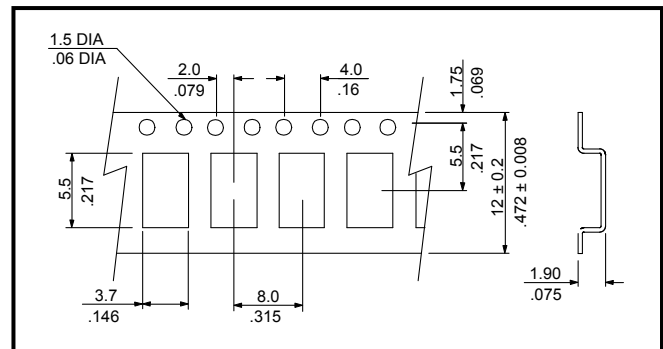

● PACKAGING

178 mm REEL DIAMETER, 12mm TAPE WIDTH, 8mm PITCH
QUANTITY: 1000 PIECES PER REEL

● PART NUMBERING SYSTEM

SERIES	-	FREQUENCY STABILITY		-	FREQUENCY	-	TAPE AND REEL
COM23		10	±100 PPM		IN MHz		TR
COM25		05	±50 PPM				
		03	±30 PPM				

EXAMPLE: COM2503-32.000-TR