



features

- Small size allows for high mounting density
- Suitable for reflow soldering
- Large DC current capacity with low DC resistance
- Polarity identification available
- E-6 series of values (customs available)
- Marking: Black body color with no marking
- Products with lead-free terminations meet EU RoHS requirements

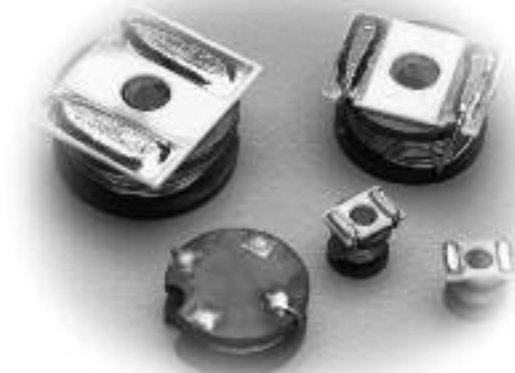


dimensions and construction

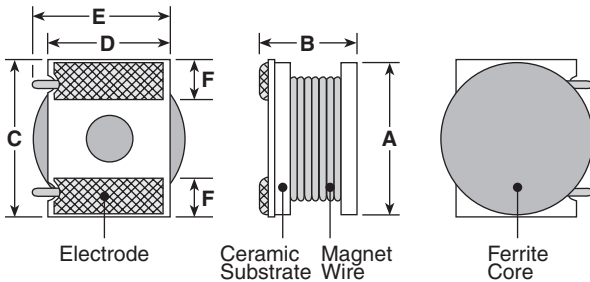

Size	Dimensions inches (mm)					
	A	B	C	D	E	F
4045	$\phi.157 \pm .008$ ($\phi 4.0 \pm 0.2$)	$.169 \pm .009$ (4.3 ± 0.2)	$.177 \pm .008$ (4.5 ± 0.2)	$.118 \pm .008$ (3.0 ± 0.2)	.138 (3.5)	$.039 \pm .112$ (1.0 ± 0.3)
9040N	$\phi.354 \pm \begin{smallmatrix} +.002 \\ -.004 \end{smallmatrix}$ ($\phi 9.0 \begin{smallmatrix} +0.05 \\ -0.1 \end{smallmatrix}$)	.193 Max. (4.9 Max.)	.402 Max. (10.2 Max.)	$.079 \pm .008$ (2.0 ± 0.2)	—	$.071 \pm .008$ (1.8 ± 0.2)
10065	$\phi.394 \pm .008$ ($\phi 10.0 \pm 0.2$)	.295 Max. (7.5 Max.)	$.409 \pm .008$ (10.4 ± 0.2)	$.315 \pm .008$ (8.0 ± 0.2)	.354 (9.0)	$.098 \pm .008$ (2.5 ± 0.2)
12065	$\phi.472 \pm .008$ ($\phi 12.0 \pm 0.2$)	.295 Max. (7.5 Max.)	$.488 \pm .008$ (12.4 ± 0.2)	$.472 \pm .008$ (10.0 ± 0.2)	.433 (11.0)	$.146 \pm .112$ (3.7 ± 0.3)

4045, 10065, 12065

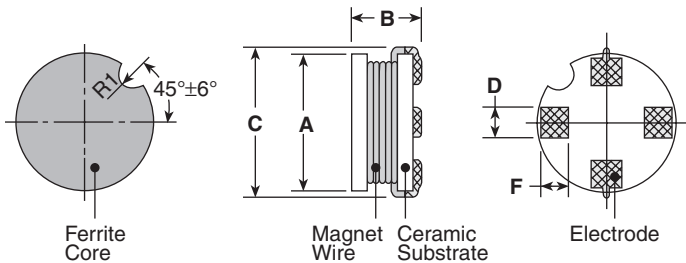

9040N

ordering information

New Part #	LPC	4045	A	TED	101	K
Type		Size	Termination Material	Packaging	Nominal Inductance	Tolerance
		4045 9040N 10065 12065	A: SnAg T: Sn (LPC4235 only)	TED: 10" embossed plastic (4045 - 1,000 pieces/reel) (9040N - 500 pieces/reel) (10065 - 300 pieces/reel) (12065 - 300 pieces/reel)	101: 100µH 221: 220µH 152: 1500µH	K: ±10% M: ±20% N: ±30%

For further information on packaging, please refer to Appendix A.

applications and ratings

Part Designation	Inductance (µH)	Inductance Tolerance	Quality Factor Minimum (MHz)	Self Resonant Frequency Minimum (MHz)	DC Resistance Maximum (Ω)	Allowable DC Current Maximum (Amps)	Measured Frequency (Hz)	
LPC4045ATED1R0M	1.0	M: ±20%	20	90.0	0.015	3.10	1000	
LPC4045ATED1R5M	1.5			70.0	0.020	2.80		
LPC4045ATED2R2M	2.2			55.0	0.023	2.50		
LPC4045ATED3R3M	3.3			45.0	0.044	1.80		
LPC4045ATED4R7M	4.7			35.0	0.062	1.45		
LPC4045ATED6R8M	6.8			25.0	0.075	1.30		
LPC4045ATED100K	10	K: ±10%	20	23.5	0.10	1.02		
LPC4045ATED150K	15			18.5	0.15	0.84		
LPC4045ATED220K	22			14.0	0.21	0.70		
LPC4045ATED330K	33			12.0	0.41	0.52		
LPC4045ATED470K	47			10.5	0.52	0.46		
LPC4045ATED680K	68			8.0	0.67	0.40		
LPC4045ATED101K	100		40	6.3	0.92	0.28		
LPC4045ATED151K	150			5.2	1.80	0.25		
LPC4045ATED221K	220			3.9	2.25	0.18		
LPC4045ATED331K	330			3.0	4.27	0.15		
LPC4045ATED471K	470			2.7	5.23	0.14		
LPC4045ATED681K	680			2.2	6.67	0.12		
LPC9040NATED100M	10	M: ±20%	40	25.0	0.07	1.55	10 kHz	
LPC9040NATED150K	15	K: ±10%	30	21.0	0.09	1.40		
LPC9040NATED220K	22			15.0	0.11	1.25		
LPC9040NATED330K	33			13.5	0.14	1.10		
LPC9040NATED470K	47		20	11.5	0.20	0.99		
LPC9040NATED680K	68			10.0	0.27	0.91		
LPC9040NATED101K	100			8.0	0.41	0.70		
LPC9040NATED151K	150	10	7.0	0.55	0.60			
LPC9040NATED221K	220		5.0	0.81	0.50			
LPC9040NATED331K	330		3.3	1.86	0.29			
LPC9040NATED471K	470		2.8	2.07	0.22			
LPC9040NATED681K	680		1.2	2.65	0.14			
LPC10065ATEDR68M	0.68	M: ±20%	40	75.0	6.0 mΩ	9.50		L Meas. Freq. 1 MHz Q Meas. Freq. 2.52 MHz
LPC10065ATED1R0M	1.0			65.0	7.0 mΩ	9.00		
LPC10065ATED1R5M	1.5			50.0	8.0 mΩ	8.50		
LPC10065ATED2R2M	2.2		30	40.0	9.0 mΩ	7.50		
LPC10065ATED3R3M	3.3			30.0	0.012	6.80		
LPC10065ATED4R7M	4.7			25.0	0.017	5.70		
LPC10065ATED6R8M	6.8	20	20.0	0.024	4.70			
LPC10065ATED100K	10		15.0	0.036	3.90			
LPC10065ATED150K	15		12.0	0.054	3.15			
LPC10065ATED220K	22	15	9.0	0.080	2.60			
LPC10065ATED330K	33		8.0	0.120	2.30			
LPC10065ATED470K	47		6.0	0.175	1.79			

applications and ratings (continued)

Part Designation	Inductance (μH)	Inductance Tolerance	Quality Factor Minimum (MHz)	Self Resonant Frequency Minimum (MHz)	DC Resistance Maximum (Ω)	Allowable DC Current Maximum (Amps)	Measured Frequency (Hz)			
LPC10065ATED680K	68	K: ±10%	30	5.0	0.255	1.48	100 MHz			
LPC10065ATED101K	100			4.0	0.380	1.22				
LPC10065ATED151K	150			3.0	0.580	1.00				
LPC10065ATED221K	220			2.5	0.850	0.82				
LPC10065ATED331K	330			2.0	1.30	0.67				
LPC10065ATED471K	470			1.5	1.85	0.57				
LPC10065ATED681K	680			1.0	2.70	0.47				
LPC10065ATED102K	1.0 mH			0.95	4.00	0.38				
LPC10065ATED152K	1.5 mH			0.85	6.10	0.31				
LPC10065ATED222K	2.2 mH			0.70	9.00	0.26				
LPC10065ATED332K	3.3 mH			0.55	13.5	0.21				
LPC12065ATEDR68N	0.68			N: ±30%	40	77.0		5.0 mΩ	10.0	2.52 MHz
LPC12065ATED1R0N	1.0	60.0	7.0 mΩ			9.50				
LPC12065ATED1R5N	1.5	47.0	8.0 mΩ			9.00				
LPC12065ATED2R2N	2.2	38.0	10.0 mΩ			8.00				
LPC12065ATED3R3M	3.3	M: ±20%	30	30.0	0.012	7.00	100 KHz			
LPC12065ATED4R7M	4.7			24.0	0.016	6.50				
LPC12065ATED6R8M	6.8			19.0	0.022	5.40				
LPC12065ATED100K	10			15.0	0.031	4.50				
LPC12065ATED150K	15	K: ±10%	15	12.0	0.046	3.63		100 KHz		
LPC12065ATED220K	22			20	9.5	0.065			3.00	
LPC12065ATED330K	33				7.5	0.093			2.40	
LPC12065ATED470K	47				6.2	0.130			2.05	
LPC12065ATED680K	68				4.9	0.182			1.70	
LPC12065ATED101K	100			30	4.0	0.260			1.38	
LPC12065ATED151K	150				3.2	0.380			1.14	
LPC12065ATED221K	220				2.5	0.540			0.94	
LPC12065ATED331K	330				2.0	0.790	0.77			
LPC12065ATED471K	470				1.6	1.08	0.65			
LPC12065ATED681K	680				1.3	1.55	0.53			
LPC12065ATED102K	1.0 mH				1.0	2.21	0.44			
LPC12065ATED152K	1.5 mH	0.83	3.20		0.35					
LPC12065ATED222K	2.2 mH	0.67	4.60	0.29						
LPC12065ATED332K	3.3 mH	0.53	6.60	0.23						
LPC12065ATED472K	4.7 mH	0.43	9.30	0.19						
LPC12065ATED682K	6.8 mH	0.34	13.2	0.16						

Inductors

environmental applications

Performance Characteristics

Parameter	Maximum Δ L	Test Method
High Temperature Exposure	±5%	LPC4045, LPC9040, LPC10065, LPC12065: +85°C ± 2°C, 500 hours LPC9040E: +125°C ± 2°C, 500 hours
Low Temperature Exposure	±5%	-40°C, 500 hours
Moisture Exposure	±5%	+40°C, 90 - 95% RH, 500 hours
Temperature Cycling	±5%	-40°C (30 minutes)/+85°C (30 minutes), 100 cycles

Surface Temperature Rise graphs and additional environmental applications can also be found at www.koaspeer.com

Specifications given herein may be changed at any time without prior notice. Please confirm technical specifications before you order and/or use.

11/20/09