

- Miniature 5.0 x 3.2 x 1.5mm SMD package
- Frequency range: 9.6MHz to 30.0MHz
- Available with either CMOS or clipped sinewave output
- May be ordered as TCXO or Voltage-Controlled TCXO
- Supply voltage 3.3 Volts



DESCRIPTION

EQ5032 TCXOs are packaged in a miniature 4 pad ceramic, 5.0 x 3.2mm outline SMD package. The part is available as a TCXO or as a voltage-controlled TCXO (VCTCXO). Output may be specified as either clipped sinewave or CMOS. The part has excellent phase noise characteristics and provides a stable source of clock signals over a wide operating temperature range.


SPECIFICATION

Product Code:	EQ5032
Frequency Range:	9.6MHz to 30.0MHz
Frequency Stability	
vs. Temperature Range:	±2.0 or ±2.5ppm
vs. Supply Voltage (±5%):	±0.3ppm maximum
vs. Load Change (±5%):	±0.2ppm maximum
vs. Ageing (at 25°C):	±1.0ppm maximum
Initial Frequency Tolerance:	±1.5ppm maximum
Operating Temperature Range:	-30° to +80°C
Storage Temperature Range:	-40° to +90°C
Supply Voltage:	+2.4V min., +3.6V max.
Current Consumption	
CMOS:	6.0mA maximum
Clipped Sinewave:	2.0mA maximum
Output Voltage Level	
CMOS:	80% Vdd minimum
Clipped Sinewave:	0.8V p-p minimum
Output Load	
CMOS:	1kΩ//15pF
Clipped Sinewave:	10kΩ//10pF
Dynamic Behaviour	
-20° to +80°C:	±0.30ppm/°C
-30° to -20°C:	±1.0ppm/°C
Start-up Time:	3.0ms max. to 90% Vdd
Duty Cycle:	60/40%
Harmonics:	-9dBc maximum

SSB PHASE NOISE at 25°C

Offset	10Hz	100Hz	1kHz	10kHz
EQ5032 (dBc/Hz)	-86	-115	-138	-146

EQ5032 - OUTLINES AND DIMENSIONS

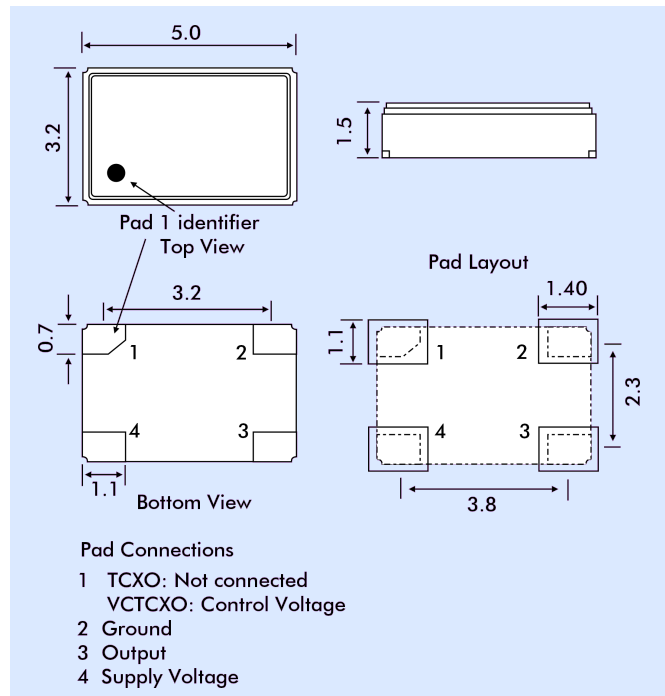

EQ5032 VOLTAGE CONTROL SPECIFICATION

Control Voltage:	Nominal 50% Vdd (0V min, Vdd max.)
Frequency Deviation:	±5.0ppm min., ±15ppm max.

PART NUMBERS

Example: EQ5032-S-V10-20.000-2.5/-30+80

