


DATA SHEET

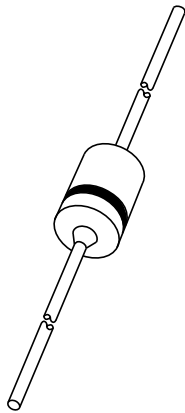

BA315 Low-voltage stabistor

Product specification
Supersedes data of April 1992
File under Discrete Semiconductors, SC01

1996 Mar 21

Low-voltage stabistor

BA315

FEATURES


- Low-voltage stabilization
- Forward voltage range:
480 mV to 1050 mV
- Total power dissipation:
max. 350 mW.

APPLICATIONS

- Low-voltage stabilization e.g.
 - Bias stabilizer in class-B output stages
 - Clipping
 - Clamping
 - Meter protection.

DESCRIPTION

Low-voltage stabilization diode in a hermetically-sealed SOD27 (DO-35) glass package.

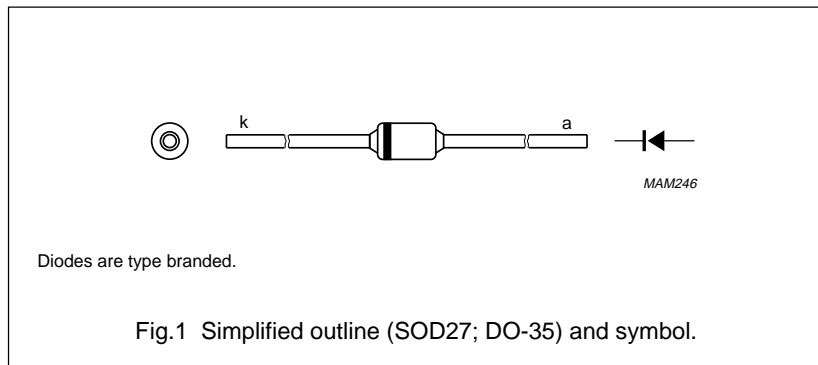

LIMITING VALUES

In accordance with the Absolute Maximum Rating System (IEC 134).

SYMBOL	PARAMETER	CONDITIONS	MIN.	MAX.	UNIT
V_R	continuous reverse voltage		–	5	V
I_F	continuous forward current		–	100	mA
P_{tot}	total power dissipation	$T_{amb} = 25\text{ °C}$	–	350	mW
T_{stg}	storage temperature		–65	+200	°C
T_j	junction temperature		–	200	°C

Low-voltage stabistor

BA315

ELECTRICAL CHARACTERISTICS $T_j = 25\text{ }^\circ\text{C}$ unless otherwise specified.

SYMBOL	PARAMETER	CONDITIONS	MIN.	TYP.	MAX.	UNIT
V_F	forward voltage	see Fig.2				
		$I_F = 0.1\text{ mA}$	480	–	540	mV
		$I_F = 1\text{ mA}$	590	–	660	mV
		$I_F = 5\text{ mA}$	670	–	740	mV
		$I_F = 10\text{ mA}$	710	–	790	mV
		$I_F = 100\text{ mA}$	875	–	1050	mV
I_R	reverse current	$V_R = 5\text{ V}$	–	–	1500	nA
r_{dif}	differential resistance	$I_F = 1\text{ mA}; f = 1\text{ kHz}$	–	50	–	Ω
		$I_F = 10\text{ mA}; f = 1\text{ kHz}$	–	6	7	Ω
S_F	temperature coefficient	$I_F = 1\text{ mA}$	–	–2.1	–	mV/K
C_d	diode capacitance	$V_R = 0\text{ V}; f = 1\text{ MHz}$	–	–	3	pF


THERMAL CHARACTERISTICS

SYMBOL	PARAMETER	CONDITIONS	VALUE	UNIT
$R_{th\ j-tp}$	thermal resistance from junction to tie-point	8 mm from the body	300	K/W
$R_{th\ j-a}$	thermal resistance from junction to ambient	maximum lead length	600	K/W

Low-voltage stabistor

BA315


GRAPHICAL DATA

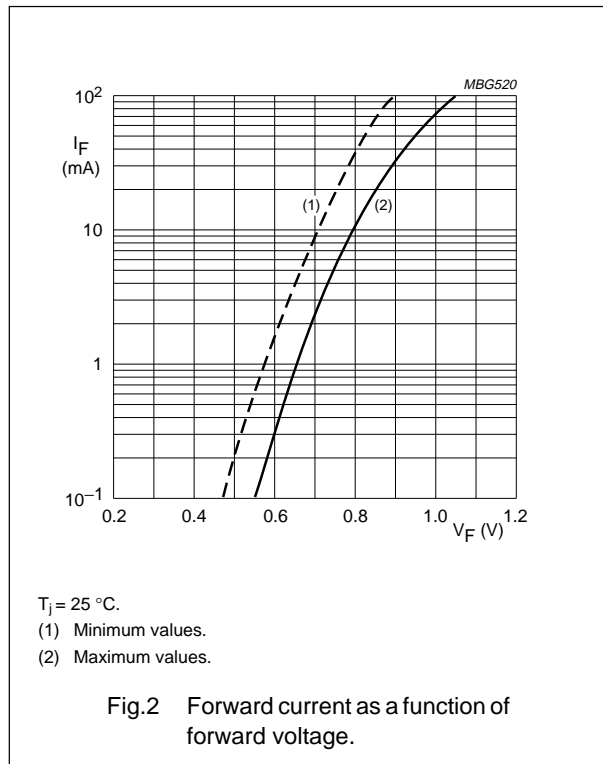

Low-voltage stabistor

BA315

PACKAGE OUTLINE

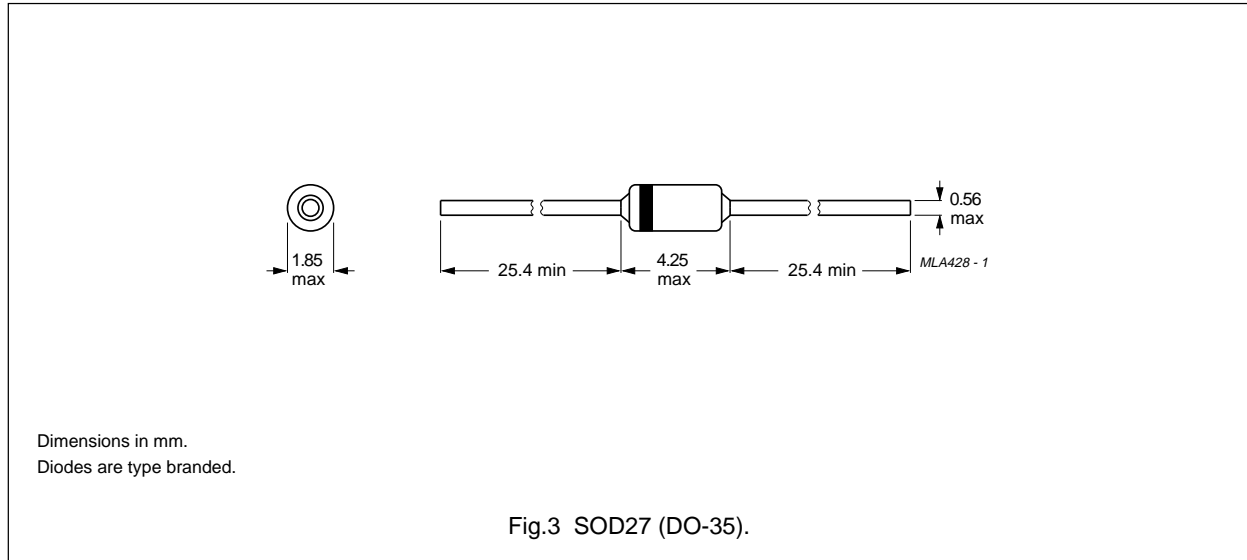

DEFINITIONS

Data sheet status	
Objective specification	This data sheet contains target or goal specifications for product development.
Preliminary specification	This data sheet contains preliminary data; supplementary data may be published later.
Product specification	This data sheet contains final product specifications.
Limiting values	
Limiting values given are in accordance with the Absolute Maximum Rating System (IEC 134). Stress above one or more of the limiting values may cause permanent damage to the device. These are stress ratings only and operation of the device at these or at any other conditions above those given in the Characteristics sections of the specification is not implied. Exposure to limiting values for extended periods may affect device reliability.	
Application information	
Where application information is given, it is advisory and does not form part of the specification.	

LIFE SUPPORT APPLICATIONS

These products are not designed for use in life support appliances, devices, or systems where malfunction of these products can reasonably be expected to result in personal injury. Philips customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Philips for any damages resulting from such improper use or sale.