

**élantec**  
HIGH PERFORMANCE ANALOG INTEGRATED CIRCUITS

# EL2224/EL2224C

Dual, 60 MHz, Unity Gain Stable, Operational Amplifier

ELANTEC INC

T-79-25

EL2224/EL2224C

1

## Features

- Unity gain stable
- Wide bandwidth—60 MHz
- High slew rate—200 V/ $\mu$ s
- High power bandwidth ( $\pm 10 V_{out}$ ) 3 MHz
- Large open loop gain 75 dB
- Low power—5 mA/amplifier
- Low input offset—1 mV typ.
- Wide supply voltage range  $V_s = \pm 5V$  to  $\pm 15V$
- Output short circuit protected

## Applications

- High performance active filters
- Video and pulse amplifiers
- Local area networks
- Wideband amplifiers

## Ordering Information


| Part No.     | Temp. Range     | Package | Outline # |
|--------------|-----------------|---------|-----------|
| EL2224CJ     | 0°C to +75°C    | CerDIP  | MDP0010   |
| EL2224CN     | 0°C to +75°C    | P-DIP   | MDP0031   |
| EL2224J      | -55°C to +125°C | CerDIP  | MDP0010   |
| EL2224J/883B | -55°C to +125°C | CerDIP  | MDP0010   |
| EL2224L/883B | -55°C to +125°C | LCC     | MDP0007   |
| EL2224CM     | 0°C to +75°C    | SOL     | MDP0027   |

## General Description


The EL2224 monolithic dual operational amplifier is an extension of Elantec's position in high speed analog products. This amplifier features unity gain stability, high slew rate and wide bandwidth, along with an excellent speed power relationship. The dual 60 MHz EL2224 consumes only 10 mA, making it ideal for video applications. The EL2224 has short circuit protected outputs and will operate from  $\pm 5V$  to  $\pm 15V$ . It is fabricated using Elantec's Complementary Bipolar process which allows both fast PNP and NPN transistors to be manufactured on a single chip.

Elantec's products and facilities comply with MIL-STD-883 Revision C, MIL-I-45208A, and other applicable quality specifications. For information on Elantec's military processing, see Elantec document, QRA-2: "Elantec's Military Processing, Monolithic Integrated Circuits".


## Connection Diagrams



2224-1

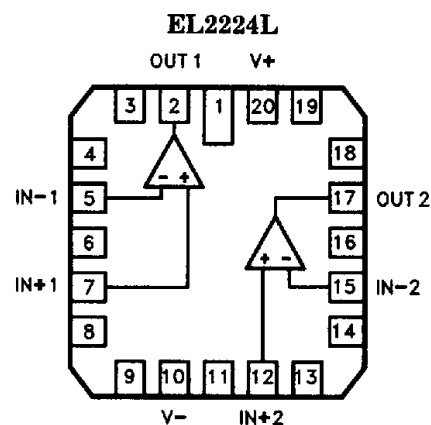

2224-2

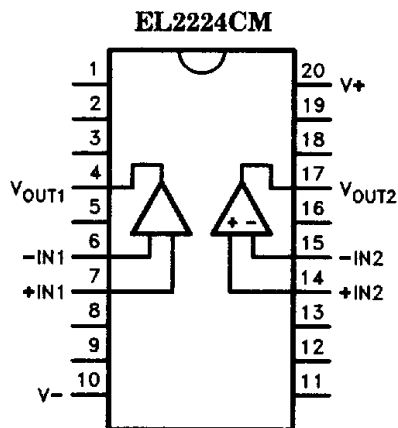

2224-3

This product covered under U.S. Patent No. 4,837,523

July 1991 Rev B

**EL2224/EL2224C**

ELANTEC INC

**Dual, 60 MHz, Unity Gain Stable, Operational Amplifier****Absolute Maximum Ratings** ( $T_A = 25^\circ\text{C}$ )

|   |                         |                               |   |
|---|-------------------------|-------------------------------|---|
| Voltage Between V+ and V-                 | 35V                     | Operational Temperature Range |   |
| Differential Input Voltage                | $\pm 6\text{V}$         | EL2224                        | $-55^\circ\text{C}$ to $+125^\circ\text{C}$ |
| Internal Power Dissipation                | See Curves              | EL2224C                       | $0^\circ\text{C}$ to $+75^\circ\text{C}$    |
| Peak Output Current                       | Short Circuit Protected | Storage Temperature Range     | $-65^\circ\text{C}$ to $+150^\circ\text{C}$ |
| Output Short Circuit Duration<br>(Note 1) | Continuous              | Maximum Junction Temperature  |   |
|   |                         | CerDIP, LCC                   | $175^\circ\text{C}$                         |
|   |                         | Plastic DIP, SOL              | $150^\circ\text{C}$                         |
|   |                         | Lead Temperature              |   |
|   |                         | DIP Package                   | $300^\circ\text{C}$                         |
|   |                         | SOL Package                   |   |
|   |                         | Vapor Phase (60 seconds)      | $215^\circ\text{C}$                         |
|   |                         | Infrared (15 seconds)         | $220^\circ\text{C}$                         |

**Important Note:**

All parameters having Min/Max specifications are guaranteed. The Test Level column indicates the specific device testing actually performed during production and Quality inspection. Elantec performs most electrical tests using modern high-speed automatic test equipment, specifically the LTX77 Series system. Unless otherwise noted, all tests are pulsed tests, therefore  $T_J = T_C = T_A$ .

| Test Level | Test Procedure  |
|------------|---|
| I          | 100% production tested and QA sample tested per QA test plan QCX0002.   |
| II         | 100% production tested at $T_A = 25^\circ\text{C}$ and QA sample tested at $T_A = 25^\circ\text{C}$ , $T_{MAX}$ and $T_{MIN}$ per QA test plan QCX0002. |
| III        | QA sample tested per QA test plan QCX0002.  |
| IV         | Parameter is guaranteed (but not tested) by Design and Characterization Data.   |
| V          | Parameter is typical value at $T_A = 25^\circ\text{C}$ for information purposes only.   |

**DC Electrical Characteristics**  $V_S = \pm 15\text{V}$ ;  $R_L = 2\text{k}\Omega$ , unless otherwise specified

| Parameter         | Description   | EL2224 |          |          |     |            | EL2224C  |          |     |            | Units                        |
|-------------------|---|--------|----------|----------|-----|------------|----------|----------|-----|------------|------------------------------|
|                   |   | Temp   | Min      | Typ      | Max | Test Level | Min      | Typ      | Max | Test Level |                              |
| V <sub>OS</sub>   | Offset Voltage  | +25°C  |          | 0.5      | 5   | I          |          | 0.5      | 5   | I          | mV                           |
|                   |   | Full   |          |          | 8   | I          |          |          | 8   | III        | mV                           |
| TCV <sub>OS</sub> | Average Offset Voltage Drift                                    | Full   |          | 20       |     | V          |          | 20       |     | V          | $\mu\text{V}/^\circ\text{C}$ |
| I <sub>B</sub>    | Bias Current  | +25°C  |          | 1.5      | 4   | I          |          | 1.5      | 4   | I          | $\mu\text{A}$                |
|                   |   | Full   |          |          | 6   | I          |          |          | 6   | III        | $\mu\text{A}$                |
| I <sub>OS</sub>   | Offset Current  | +25°C  |          | 0.2      | 2   | I          |          | 0.2      | 2   | I          | $\mu\text{A}$                |
|                   |   | Full   |          |          | 3   | I          |          |          | 3   | III        | $\mu\text{A}$                |
| R <sub>IN</sub>   | Input Resistance  | +25°C  |          | 40       |     | V          |          | 40       |     | V          | k $\Omega$                   |
| C <sub>IN</sub>   | Input Capacitance   | +25°C  |          | 1        |     | V          |          | 1        |     | V          | pF                           |
| V <sub>CM</sub>   | Common Mode Input Range   | Full   | $\pm 10$ | $\pm 12$ |     | I          | $\pm 10$ | $\pm 12$ |     | II         | V                            |
| e <sub>IN</sub>   | Input Noise Voltage<br>( $f = 1\text{ kHz}$ , $R_G = 0\Omega$ ) | +25°C  |          | 15       |     | V          |          | 15       |     | V          | $\text{nV}/\sqrt{\text{Hz}}$ |
| A <sub>VOL</sub>  | Large Signal Voltage Gain<br>(Notes 2, 3)                       | +25°C  | 4k       | 6k       |     | I          | 4k       | 6k       |     | I          | V/V                          |
|                   |   | Full   | 2.5k     |          |     |            | 2.5k     |          |     | III        | V/V                          |

ELANTEC INC

**EL2224/EL2224C****Dual, 60 MHz, Unity Gain Stable, Operational Amplifier**

EL2224/EL2224C

**DC Electrical Characteristics**  $V_S = \pm 15V$ ;  $R_L = 2 k\Omega$ , unless otherwise specified — Contd.

| Parameter | Description                           | EL2224 |          |            |          |            | EL2224C  |            |          |            | Units    |
|-----------|---------------------------------------|--------|----------|------------|----------|------------|----------|------------|----------|------------|----------|
|           |                                       | Temp   | Min      | Typ        | Max      | Test Level | Min      | Typ        | Max      | Test Level |          |
| CMRR      | Common-Mode Rejection Ratio (Note 4)  | Full   | 70       | 80         |          | I          | 60       | 80         |          | II         | dB       |
| $V_O$     | Output Voltage Swing                  | Full   | $\pm 11$ | $\pm 12.5$ |          | I          | $\pm 11$ | $\pm 12.5$ |          | II         | V        |
| $I_{SC}$  | Short Circuit Current                 | 25°C   |          | $\pm 50$   | $\pm 70$ | I          |          | $\pm 50$   | $\pm 70$ | I          | mA       |
| $R_O$     | Output Resistance                     | 25°C   |          | 40         |          | V          |          | 40         |          | V          | $\Omega$ |
| $I_s$     | Supply Current                        | Full   |          | 9.5        | 13       | I          |          | 9.5        | 13       | II         | mA       |
| PSRR      | Power Supply Rejection Ratio (Note 5) | Full   | 60       | 75         |          | I          | 60       | 75         |          | II         | dB       |

**AC Electrical Characteristics**  $V_S = \pm 15V$ ;  $R_L = 2 k\Omega$ , unless otherwise specified

| Parameter | Description                                      | EL2224 |     |     |     |            | EL2224C |     |     |            | Units      |
|-----------|--|--------|-----|-----|-----|------------|---------|-----|-----|------------|------------|
|           |  | Temp   | Min | Typ | Max | Test Level | Min     | Typ | Max | Test Level |            |
| $f_u$     | Open Loop Unity Bandwidth (Note 6)               | 25°C   |     | 60  |     | V          |         | 60  |     | V          | MHz        |
| FPBW      | Full Power Bandwidth (Notes 2, 7)                | 25°C   | 2.4 | 3.1 |     | I          | 2.4     | 3.1 |     | I          | MHz        |
| $t_r$     | Rise Time (Note 8)                               | 25°C   |     | 6   |     | V          |         | 6   |     | V          | ns         |
| OS        | Overshoot (Note 8)                               | 25°C   |     | 20  |     | V          |         | 20  |     | V          | %          |
| SR        | Slew Rate (Note 8)                               | 25°C   | 150 | 200 |     | I          | 150     | 200 |     | I          | V/ $\mu$ s |
| $t_s$     | Settling Time (Notes 9, 10)<br>10V Step to 0.05% | 25°C   |     | 120 |     | V          |         | 120 |     | V          | ns         |
| Ch $S_p$  | Channel Separation<br>( $f = 10$ MHz)            | Full   |     | 70  |     | V          |         | 70  |     | V          | dB         |

Note 1: A heat sink is required to keep the junction temperature below absolute maximum when the output is shorted.

Note 2:  $V_O = \pm 10V$ .Note 3:  $R_L = 2 k\Omega$ .Note 4: Two tests are performed.  $V_{CM} = 0V$  to  $+10V$  and  $V_{CM} = 0$  to  $-10V$ .Note 5: Two tests are performed.  $V_+ = 15V$ , and  $V_-$  is changed from  $-5V$  to  $-15V$ .  $V_- = -15V$ , and  $V_+$  is changed from  $+5V$  to  $+15V$ .Note 6:  $V_O = 100$  mV.Note 7: Full Power Bandwidth guaranteed based on slew rate measurement using:  $FPBW = \text{Slew Rate} / 2 \pi V_{PEAK}$ .

Note 8: Refer to Test Circuit section of data sheet.

Note 9: Settling time measurement are made with techniques in the following reference: "Take The Guesswork Out of Settling-Time Measurements," EDN September 19, 1985.


Note 10:  $A_V = +1$ ,  $R_L = 2 k\Omega$ .

# EL2224/EL2224C


Dual, 60 MHz, Unity Gain Stable, Operational Amplifier

ELANTEC INC


## Typical Performance Curves

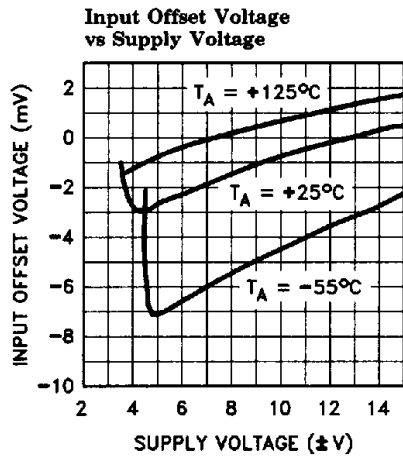


2224-4

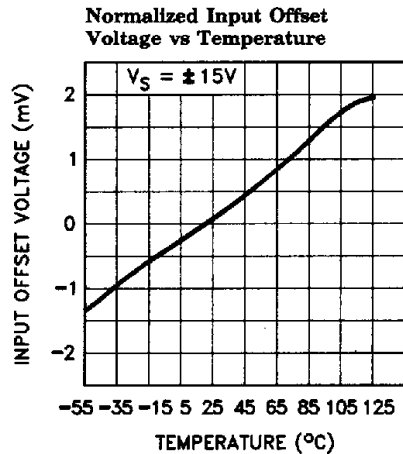


2224-5

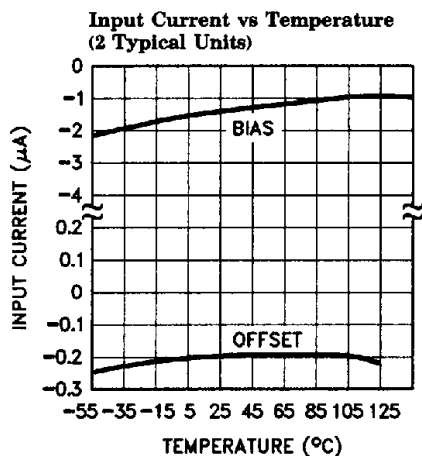


2224-6

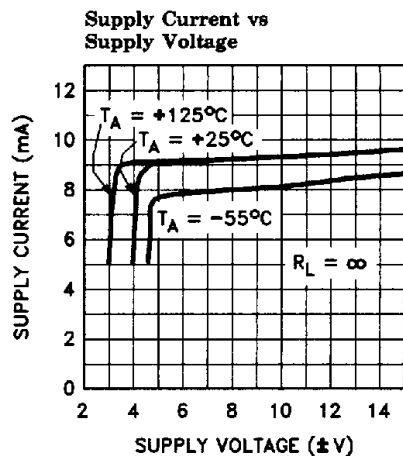

2224-7

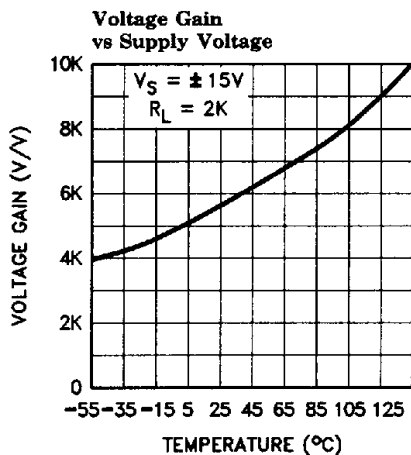

2224-8

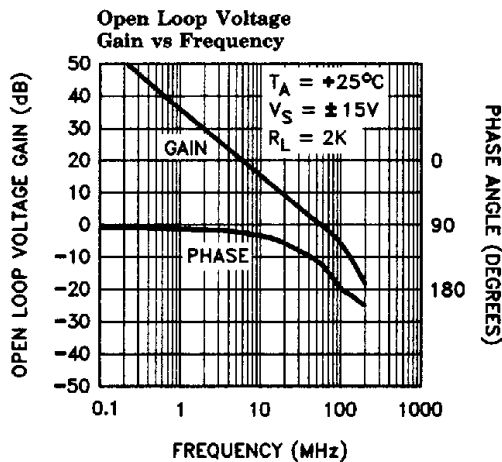

2224-9

ELANTEC INC


# EL2224/EL2224C

## Dual, 60 MHz, Unity Gain Stable, Operational Amplifier


EL2224/EL2224C

1


### Typical Performance Curves — Contd.

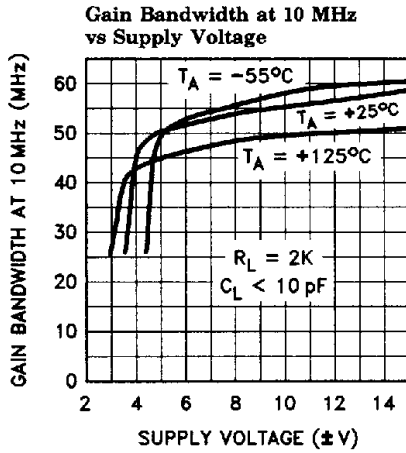


2224-10

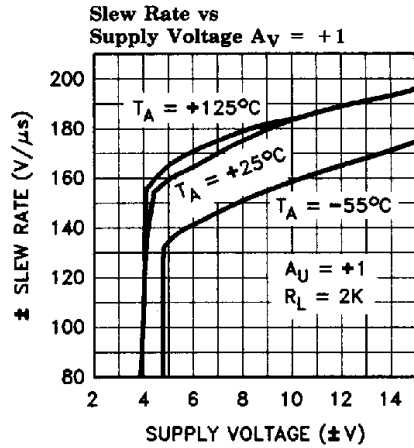


2224-11

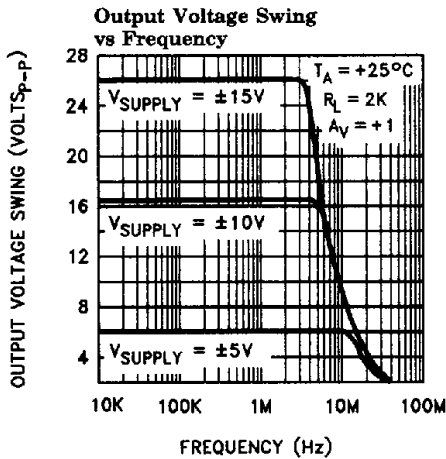


2224-12

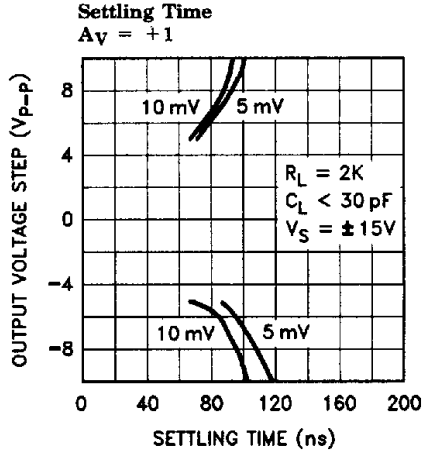

2224-13

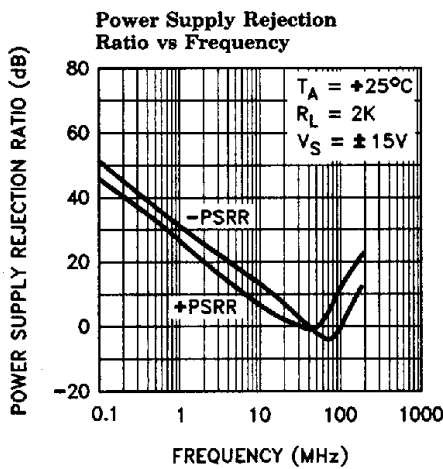

2224-14

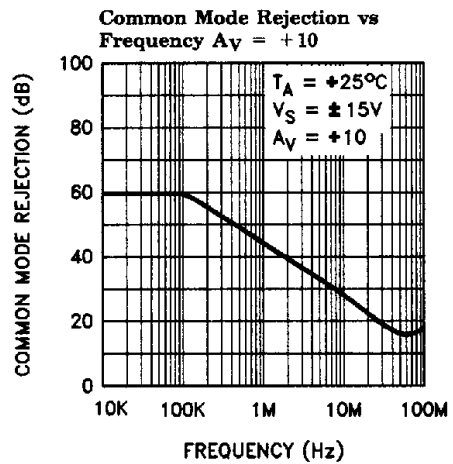


2224-15


# EL2224/EL2224C

ELANTEC INC  
Dual, 60 MHz, Unity Gain Stable, Operational Amplifier


## Typical Performance Curves — Contd.

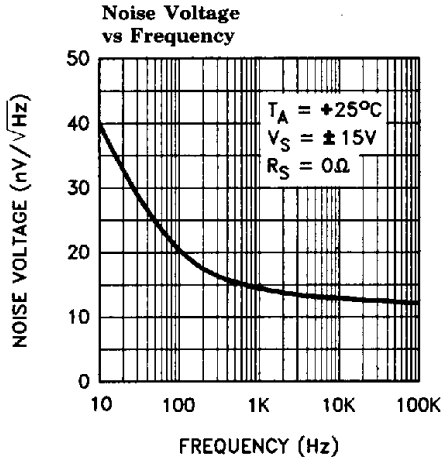

2224-16

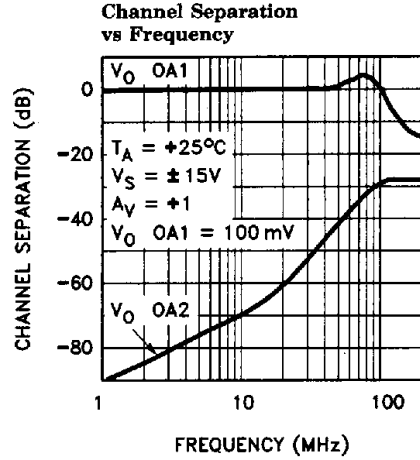


2224-17

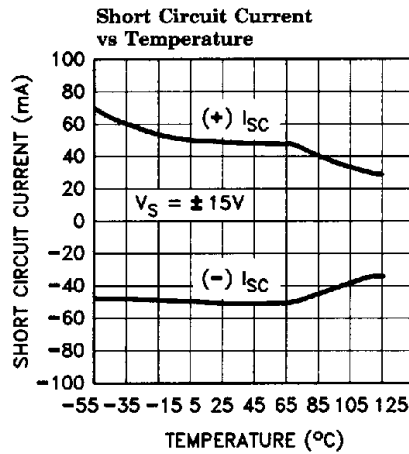

2224-18


### Large Signal Response

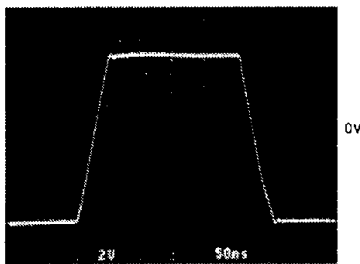

$A_V = +1$   
 $V_{IN} = \pm 5\text{V}$   
 $V_O = \pm 5\text{V}$   
 $R_L = 2\text{k}$

2224-19

### Small Signal Response

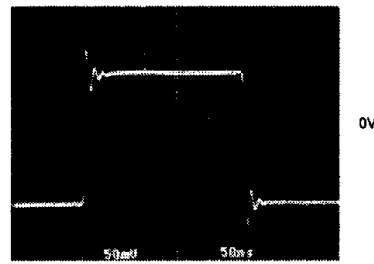

$A_V = +1$   
 $V_{IN} = \pm 100 \text{ mV}$   
 $V_O = \pm 100 \text{ mV}$   
 $R_L = 2\text{k}$

2224-20


ELANTEC INC

**EL2224/EL2224C**


*Dual, 60 MHz, Unity Gain Stable, Operational Amplifier*

EL2224/EL2224C


**Typical Performance Curves — Contd.**

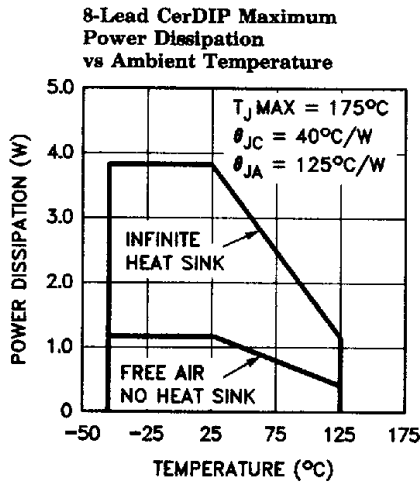


2224-21

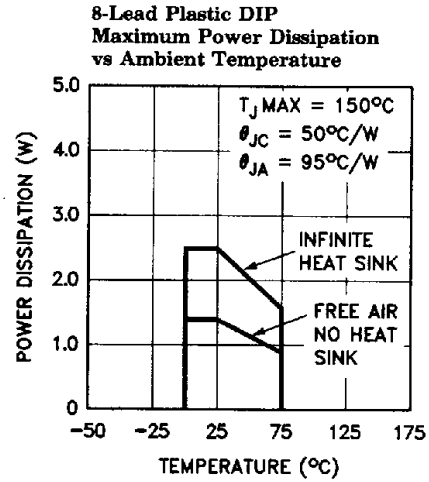

2224-22

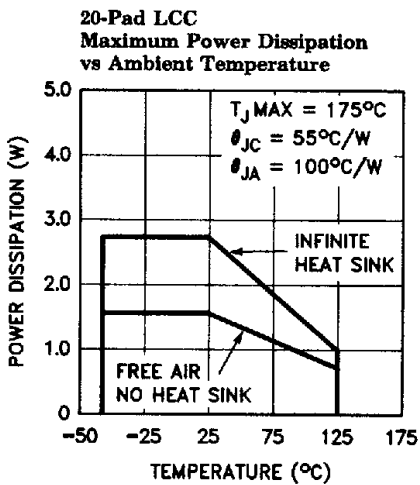


2224-23

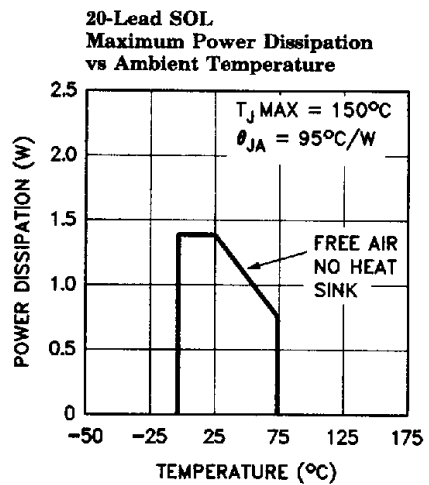


2224-24

**Test Circuit**

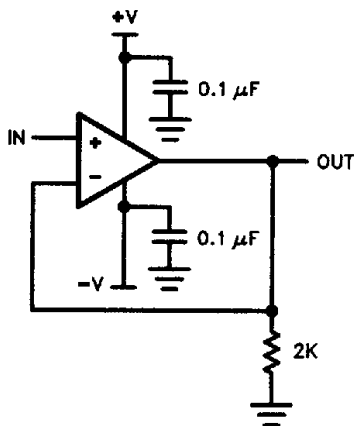

2224-27

**Burn-In Circuit**

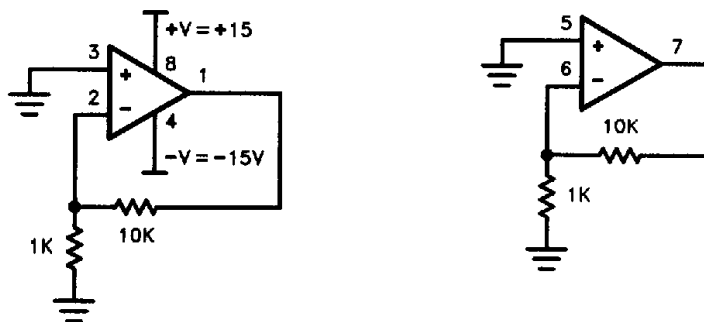

2224-28


Pin numbers are for the 8-lead CerDIP.  
 Burn-in circuit is identical for all package types.

2224-29

$A_V = +1$   
 $C_L \leq 10 \text{ pF}$  Scope Probe

**EL2224/EL2224C**

ELANTEC INC

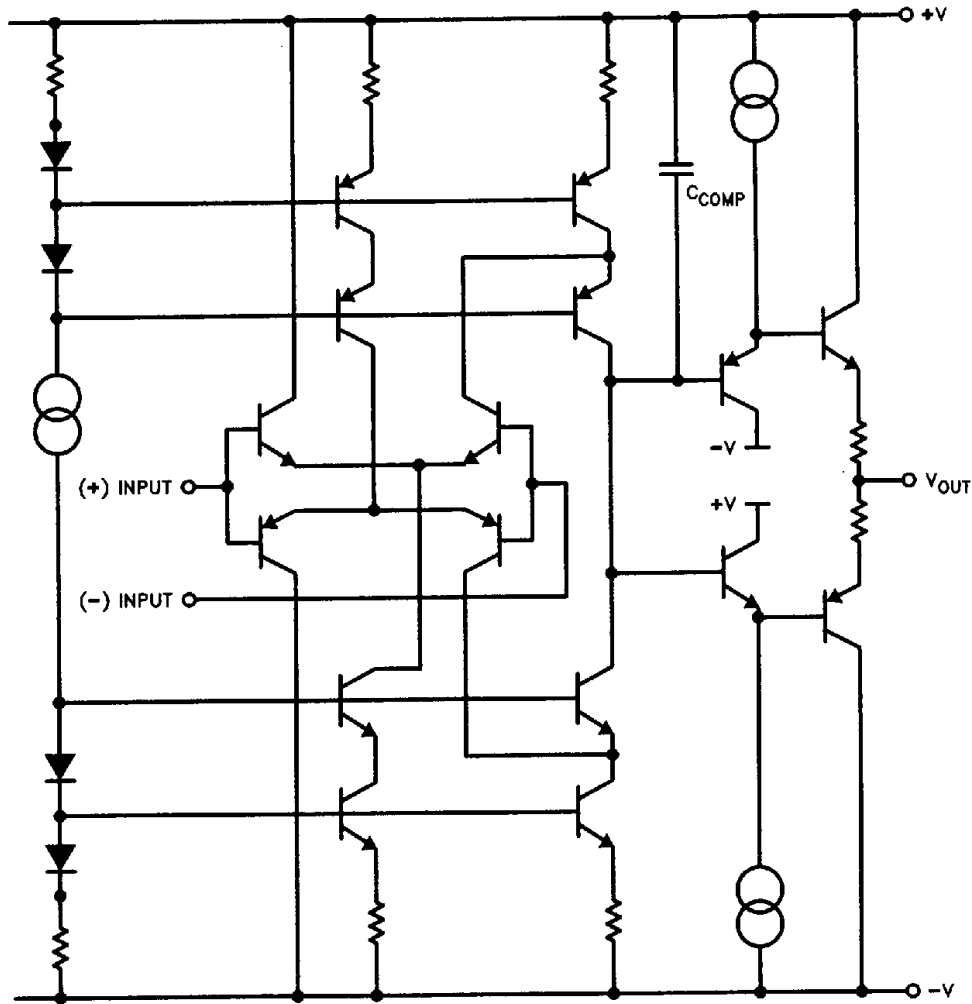**Dual, 60 MHz, Unity Gain Stable, Operational Amplifier****Simplified Schematic (one amplifier)**

2224-26



ELANTEC INC

**EL2224/EL2224C**  
*Dual, 60 MHz, Unity Gain Stable, Operational Amplifier*

EL2224/EL2224C

**EL2224 Macromodel**

```

* Connections:      + input
*                   |
*                   | -input
*                   | + Vsupply
*                   | -Vsupply
*                   | output
*                   |
.subckt M2224      3   2   7   4   6

```

## \* Input stage

```

ie 37 4 4.5mA
r6 36 37 75
r7 38 37 75
rc1 7 30 75
rc2 7 39 75
q1 30 3 36 qn
q2 39 2 38 qna
ediff 33 0 39 30 2.6
rdiff 33 0 1Meg

```

## \* Compensation Section

```

ga 0 34 33 0 3m
rh 34 0 1Meg
ch 34 0 15pF
rc 34 40 300
cc 40 0 1pF

```

## \* Poles

```

ep 41 0 40 0 1
rpa 41 42 75
cpa 42 0 3pF
rpb 42 43 50
cpb 43 0 3pF

```

## \* Output Stage

```

ios1 7 50 0.5mA
ios2 51 4 0.5mA
q3 4 43 50 qp
q4 7 43 51 qn
q5 7 50 52 qn
q6 4 51 53 qp
ros1 52 6 25
ros2 6 53 25

```

## \* models

```


.model qn npn(is = 800.0E-18 bf = 350 tf = 0.2nS)
.model qna npn(is = 864E-18 bf = 400 tf = 0.2nS)
.model qp pnp(is = 800E-18 bf = 60 tf = 0.2nS)
.ends

```

1

**EL2224/EL2224C****Dual, 60 MHz, Unity Gain Stable, Operational Amplifier**

ELANTEC INC

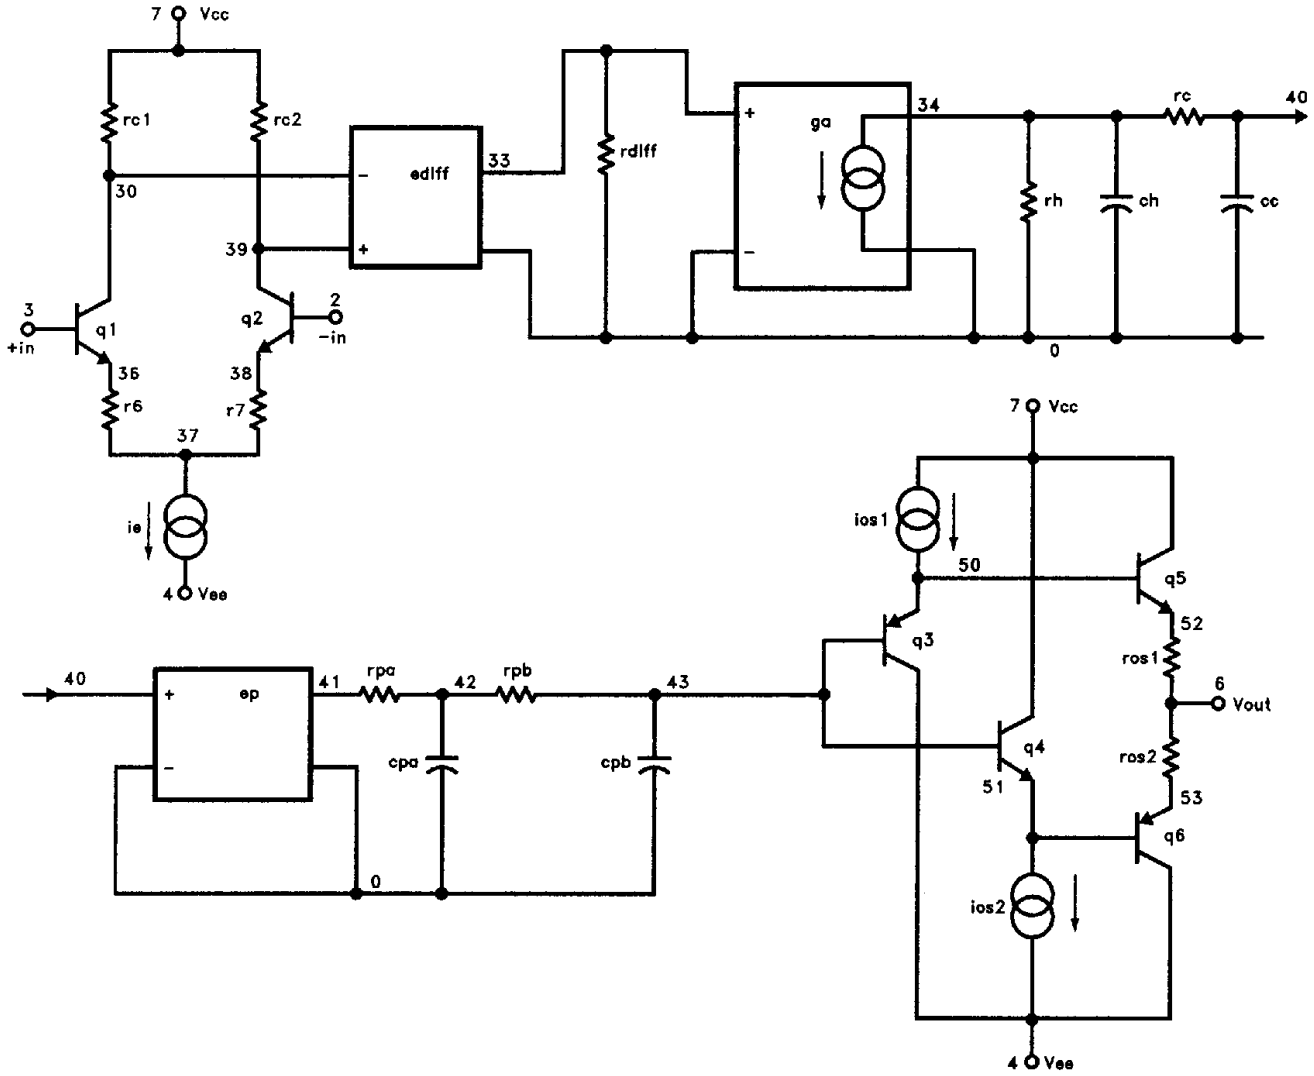**EL2224 Macromodel — Contd.**

2224-30