


Surface Mount TRANSZORB[®] Transient Voltage Suppressors



FEATURES

- Very low profile - typical height of 0.65 mm
- Ideal for automated placement
- Oxide planar chip junction
- Uni-directional polarity only
- Peak pulse power: 100 W (10/1000 μ s)
- ESD capability: **15 kV (air), 8 kV (contact)**
- Meets MSL level 1, per J-STD-020C, LF max peak of 260 °C
- Component in accordance to RoHS 2002/95/EC and WEEE 2002/96/EC

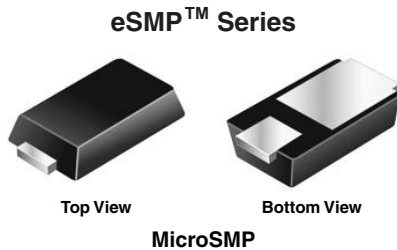

TYPICAL APPLICATIONS

Use in sensitive electronics protection against voltage transients induced by inductive load switching and lighting on ICs, MOSFET, signal lines of sensor units specifically for protecting 5.0 V supplied sensitive equipment against transient overvoltages.

PRIMARY CHARACTERISTICS	
V_{WM}	5.0 V
P_{PPM}	100 W
I_{FSM}	25 A
T_J max.	150 °C

MECHANICAL DATA

Case: MicroSMP

Epoxy meets UL 94V-0 flammability rating

Terminals: Matte tin plated leads, solderable per J-STD-002B and JESD22-B102D

E3 suffix for commercial grade

Polarity: Color band denotes the cathode end

MAXIMUM RATINGS ($T_A = 25$ °C unless otherwise noted)			
PARAMETER	SYMBOL	VALUE	UNIT
Peak pulse power dissipation ⁽¹⁾⁽²⁾	P_{PPM}	100	W
Peak pulse current with a 10/1000 μ s waveform (Fig. 1)	I_{PPM}	10.9	A
Non repetitive peak forward surge current 10 ms single half sine-wave ⁽²⁾	I_{FSM}	25	A
Power dissipation $T_L = 120$ °C ⁽²⁾	P_D	1.0	W
Operating junction and storage temperature range	T_J, T_{STG}	- 55 to + 150	°C

Notes:

(1) Non-repetitive current pulse, per Fig. 1

(2) Mounted on 6.0 x 6.0 mm copper pads to each terminal



ELECTRICAL CHARACTERISTICS (T _A = 25 °C unless otherwise noted)										
DEVICE TYPE	DEVICE MARKING CODE	BREAKDOWN VOLTAGE V _{BR} AT I _T ⁽¹⁾ (V)		TEST CURRENT I _T (mA)	STAND-OFF VOLTAGE V _{WM} (V)	MAXIMUM REVERSE LEAKAGE AT V _{WM} I _D (μA)	MAXIMUM CLAMPING VOLTAGE ⁽²⁾ V _C (V) AT I _{PPM} (A)		MAXIMUM CLAMPING VOLTAGE ⁽²⁾ V _C (V) AT I _{PPM} (A)	
		MIN	MAX				10/1000 μs	8/20 μs	10/1000 μs	8/20 μs
MSP5.0A	AE	6.40	7.07	10	5.0	100	9.2	10.9	14.5	57

Notes:

- (1) Pulse test: t_p ≤ 50 ms
 (2) Surge current waveform per Fig. 1 and derate per Fig. 2

THERMAL CHARACTERISTICS (T _A = 25 °C unless otherwise noted)			
PARAMETER	SYMBOL	VALUE	UNIT
Typical thermal resistance ⁽¹⁾	R _{θJA}	125	°C/W
	R _{θJL}	30	

Note:

- (1) Thermal resistance from junction to ambient and junction to lead mounted on P.C.B. with 6.0 x 6.0 mm copper pad areas.
 R_{θJL} is measured at the terminal of cathode band.

IMMUNITY TO STATIC ELECTRICAL DISCHARGE TO THE FOLLOWING STANDARDS (T _A = 25 °C unless otherwise noted)					
STANDARD	TEST TYPE	TEST CONDITIONS	SYMBOL	CLASS	VALUE
AEC Q101-001	Human body model (contact mode)	C = 100 pF, R = 1.5 kΩ	V _C	H3B	> 8 kV
IEC-61000-4-2 ⁽²⁾	Human body model (air discharge mode) ⁽¹⁾	C = 150 pF, R = 150 Ω		4	> 15 kV

Notes:

- (1) Immunity to IEC-61000-4-2 air discharge mode has a typical performance > 30 kV
 (2) System ESD standard

ORDERING INFORMATION (Example)				
PREFERRED P/N	UNIT WEIGHT (g)	PREFERRED PACKAGE CODE	BASE QUANTITY	DELIVERY MODE
MSP5.0A-E3/89A	0.006	89A	4500	7" diameter plastic tape and reel

RATINGS AND CHARACTERISTICS CURVES

($T_A = 25\text{ }^\circ\text{C}$ unless otherwise noted)

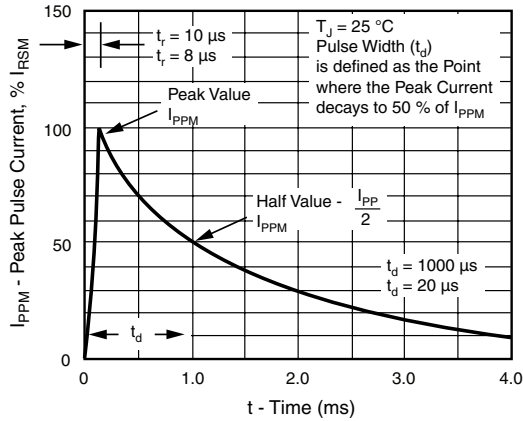


Figure 1. Pulse Waveform

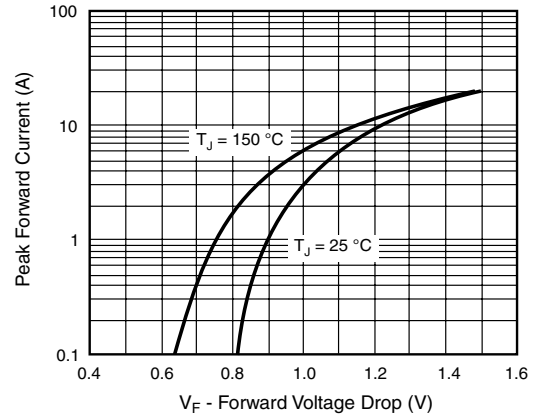


Figure 4. Typical Peak Forward Voltage Drop vs. Peak Forward Current

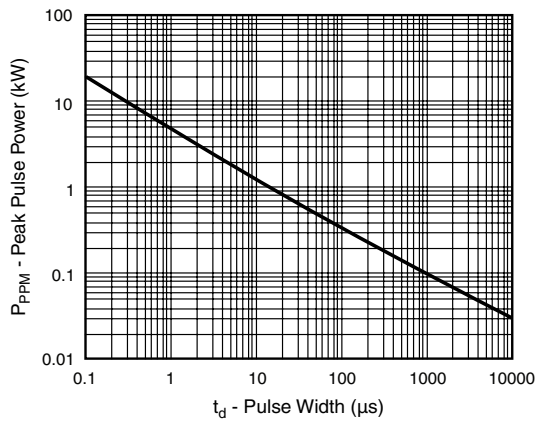


Figure 2. Peak Pulse Power Rating Curve

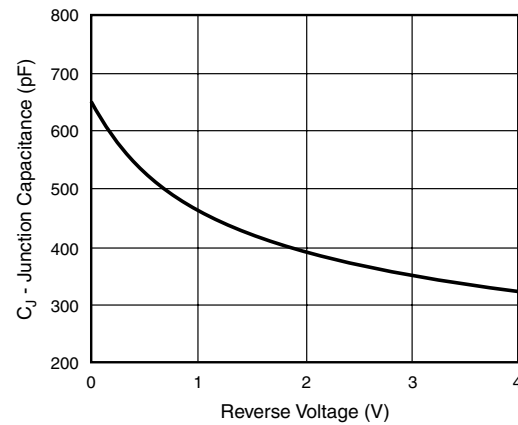


Figure 5. Typical Junction Capacitance

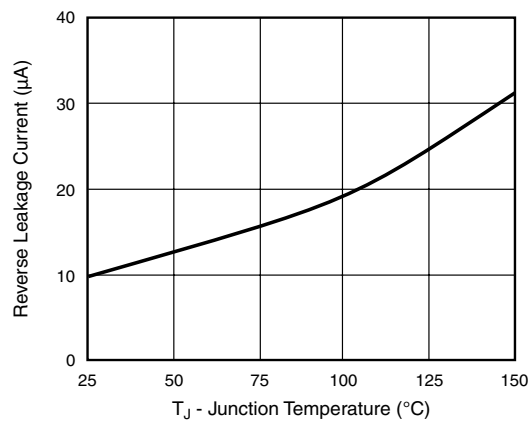


Figure 3. Relative Variation of Leakage Current vs. Junction Temperature


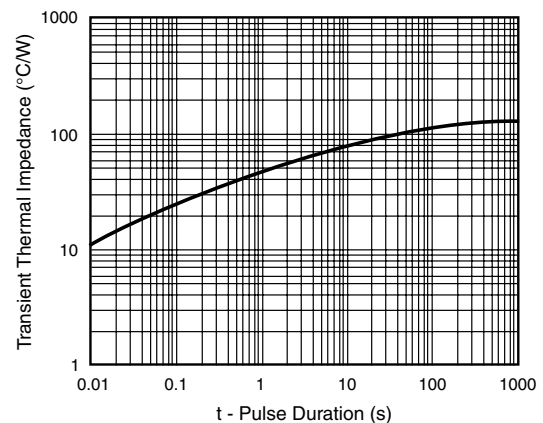


Figure 6. Typical Transient Thermal Impedance

PACKAGE OUTLINE DIMENSIONS in inches (millimeters)

MicroSMP



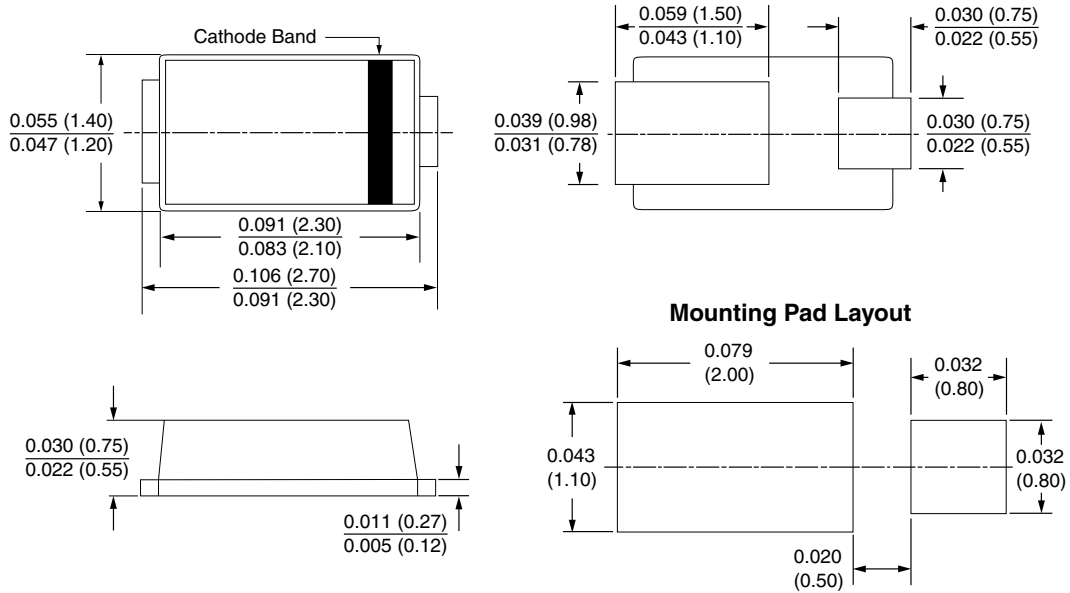

Notice

Specifications of the products displayed herein are subject to change without notice. Vishay Intertechnology, Inc., or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document. Except as provided in Vishay's terms and conditions of sale for such products, Vishay assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of Vishay products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Vishay for any damages resulting from such improper use or sale.