


# Schottky MiniMod

## FST6380 – FST63100

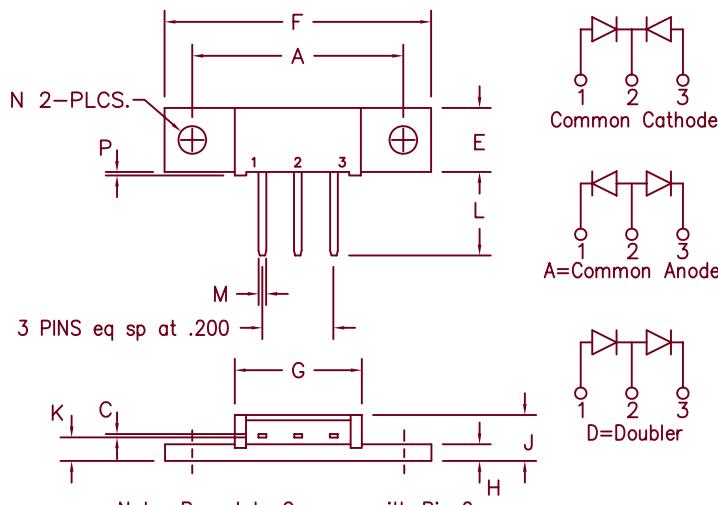

Dim.	Inches		Millimeter		Notes
	Minimum	Maximum	Minimum	Maximum	
A	1.180	1.195	29.97	30.35	
C	.025	.035	0.64	0.89	
E	.350	.370	8.89	9.40	
F	1.490	1.510	37.85	38.35	
G	.695	.715	17.65	18.16	
H	.088	.098	2.24	2.49	
J	.240	.260	6.10	6.60	
K	.115	.135	2.92	3.43	
L	.460	.480	11.68	12.19	
M	.034	.046	0.86	1.17	
N	.151	.161	3.84	4.09	Dia.
P	.015	.025	0.38	0.64	

Microsemi  
Catalog Number

Industry  
Part Number

Working  
Peak Reverse  
Voltage

Repetitive  
Peak Reverse  
Voltage

FST6380\*      63CNQ080

80V

80V

FST6390\*      63CNQ090

90V

90V

FST63100\*      63CNQ100

100V

100V

- Schottky Barrier Rectifier
- Guard Ring Protection
- 2X30 Amperes avg.
- 175°C Junction Temperature
- Reverse Energy Tested
- VRRM – 80 to 100 Volts

\*Add the Suffix A for Common Anode, D for Doubler

### Electrical Characteristics

Average forward current per pkg  
Average forward current per leg

I<sub>F(AV)</sub> 60 Amps

T<sub>C</sub> = 150°C, Square wave, R<sub>θJC</sub> = 0.5°C/W

Maximum surge current per leg

I<sub>F(AV)</sub> 30 Amps

T<sub>C</sub> = 150°C, Square wave, R<sub>θJC</sub> = 1.0°C/W

Max repetitive peak reverse current per leg

I<sub>FSM</sub> 600 Amps

8.3 ms, half sine, T<sub>J</sub> = 175°C

Max peak forward voltage per leg

I<sub>R(OV)</sub> 2 Amps

f = 1 KHZ, 25°C, 1 usec square wave

Max peak forward voltage per leg

V<sub>FM</sub> 0.60 Volts

I<sub>FM</sub> = 30A: T<sub>J</sub> = 175°C\*

Max peak reverse current per leg

V<sub>FM</sub> 0.82 Volts

I<sub>FM</sub> = 30A: T<sub>J</sub> = 25°C\*

Max peak reverse current per leg

I<sub>RM</sub> 20 mA

V<sub>RRM</sub>, T<sub>J</sub> = 125°C\*

Max reverse current per leg

I<sub>RM</sub> 1.5 mA

V<sub>RRM</sub>, T<sub>J</sub> = 25°C

Typical junction capacitance per leg

C<sub>J</sub> 1000 pF

V<sub>R</sub> = 5.0V, T<sub>C</sub> = 25°C

\*Pulse test: Pulse width 300 usec, Duty cycle 2%

### Thermal and Mechanical Characteristics

Storage temp range

T<sub>STG</sub>

-55°C to 175°C

Operating junction temp range

T<sub>J</sub>

-55°C to 175°C

Max thermal resistance per leg

R<sub>θJC</sub>

1.0°C/W Junction to case

Max thermal resistance per pkg

R<sub>θJC</sub>

0.5°C/W Junction to case

Typical thermal resistance (greased)

R<sub>θCS</sub>

0.3°C/W Case to sink

Mounting Base Torque

10 inch pounds maximum

Weight

0.3 ounce (8.4 grams) typical



SCOTTSDALE  
8700 East Thomas Road, P.O. Box 1390  
Scottsdale, AZ 85252  
PH: (480) 941-6300  
FAX: (480) 947-1503  
[www.microsemi.com](http://www.microsemi.com)

05-23-07 Rev. 2

# FST6380 – FST63100

Figure 1  
Typical Forward Characteristics – Per Leg

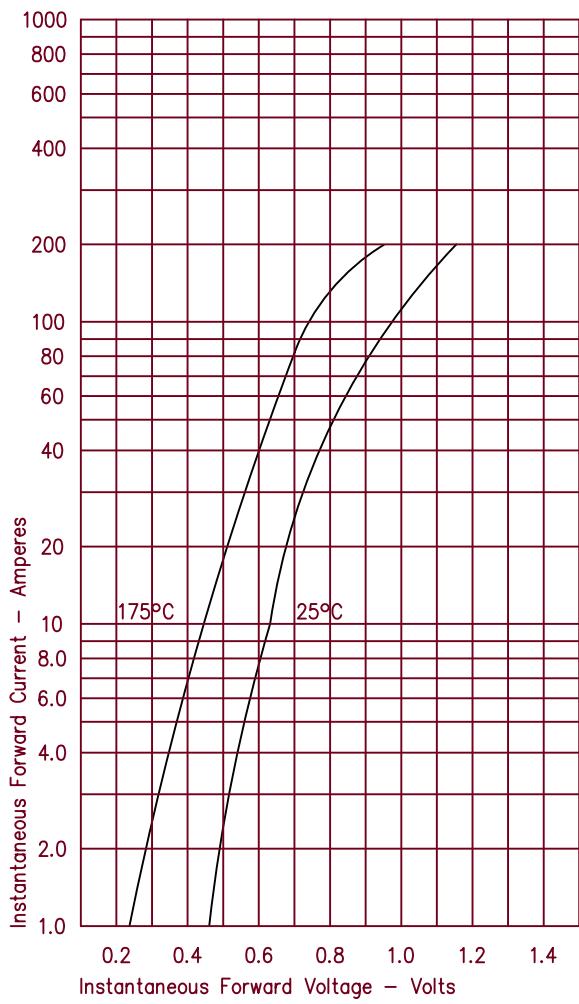


Figure 2  
Typical Reverse Characteristics – Per Leg

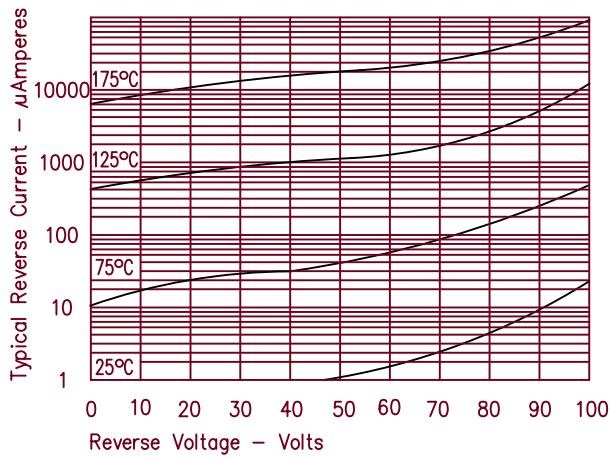


Figure 3  
Typical Junction Capacitance – Per Leg

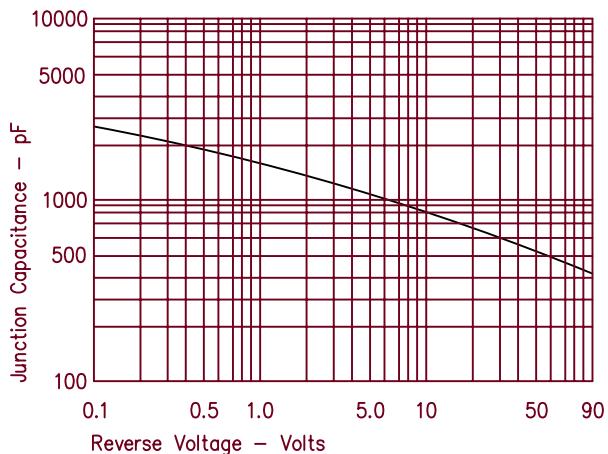


Figure 4  
Forward Current Derating – Per Leg

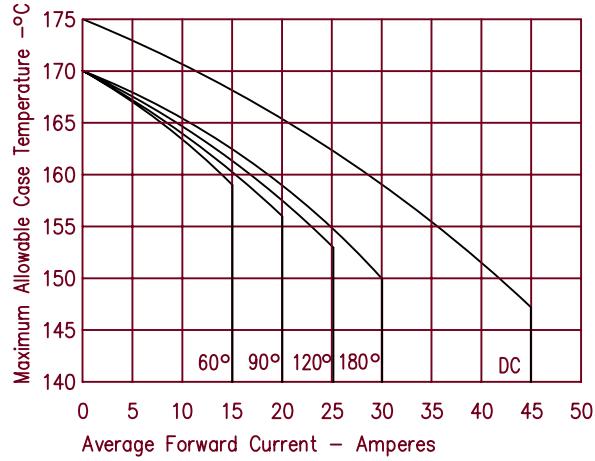


Figure 5  
Maximum Forward Power Dissipation – Per Leg

