#### **Features**

- Single 2.7V 3.6V Supply
- Fast Read Access Time 200 ns
- Automatic Page Write Operation
  - Internal Address and Data Latches for 64 Bytes
  - Internal Control Timer
- Fast Write Cycle Times
  - Page Write Cycle Time: 10 ms Maximum
  - 1- to 64-byte Page Write Operation
- Low Power Dissipation
  - 15 mA Active Current
  - 20 µA CMOS Standby Current
- Hardware and Software Data Protection
- Data Polling for End of Write Detection
- High Reliability CMOS Technology
  - Endurance: 10,000 Cycles
  - Data Retention: 10 Years
- JEDEC Approved Byte-wide Pinout
- Industrial Temperature Ranges
- Green (Pb/Halide-free) Packaging Option

### 1. Description

The AT28BV256 is a high-performance electrically erasable and programmable read-only memory. Its 256K of memory is organized as 32,768 words by 8 bits. Manufactured with Atmel's advanced nonvolatile CMOS technology, the device offers access times to 200 ns with power dissipation of just 54 mW. When the device is deselected, the CMOS standby current is less than 200  $\mu$ A.

The AT28BV256 is accessed like a Static RAM for the read or write cycle without the need for external components. The device contains a 64-byte page register to allow writing of up to 64 bytes simultaneously. During a write cycle, the addresses and 1 to 64 bytes of data are internally latched, freeing the address and data bus for other operations. Following the initiation of a write cycle, the device will automatically write the latched data using an internal control timer. The end of a write cycle can be detected by Data polling of I/O7. Once the end of a write cycle has been detected a new access for a read or write can begin.

Atmel's AT28BV256 has additional features to ensure high quality and manufacturability. The device utilizes internal error correction for extended endurance and improved data retention characteristics. An optional software data protection mechanism is available to guard against inadvertent writes. The device also includes an extra 64 bytes of EEPROM for device identification or tracking.



256K (32K x 8)
Battery-Voltage
Parallel
EEPROMs

AT28BV256






### 2. Pin Configurations

Pin Name	Function
A0 - A14	Addresses
CE	Chip Enable
ŌE	Output Enable
WE	Write Enable
I/O0 - I/O7	Data Inputs/Outputs
NC	No Connect
DC	Don't Connect


### 2.2 28-lead PDIP, SOIC - Top View

A14 🗀	1	28	□ vcc
A12 🗀	2	27	□ WE
A7 🗀	3	26	□ A13
A6 🗀	4	25	A8
A5 🗀	5	24	A9
A4 🗀	6	23	A11
A3 🗀	7	22	□ ŌE
A2 🗀	8	21	A10
A1 🗀	9	20	CE
A0 🗀	10	19	I/O7
I/O0	11	18	□ I/O6
I/O1	12	17	I/O5
I/O2	13	16	□ I/O4
GND □	14	15	□ I/O3

### 2.1 32-lead PLCC - Top View




### 2.3 28-lead TSOP - Top View



Note: 1. PLCC package pins 1 and 17 are Don't Connect.

### 3. Block Diagram

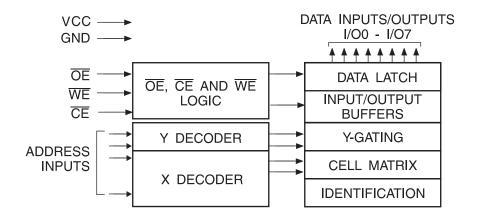

### 4. Absolute Maximum Ratings\*

Temperature under Bias55°C to +125°C
Storage Temperature65°C to +150°C
All Input Voltages (including NC Pins) with Respect to Ground0.6V to +6.25V
All Output Voltages with Respect to Ground0.6V to V <sub>CC</sub> + 0.6V
Voltage on $\overline{\text{OE}}$ and A9 with Respect to Ground0.6V to +13.5V

\*NOTICE:

Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. This is a stress rating only and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability





### 5. Device Operation

#### 5.1 Read

The AT28BV256 is accessed like a Static RAM. When  $\overline{CE}$  and  $\overline{OE}$  are low and  $\overline{WE}$  is high, the data stored at the memory location determined by the address pins is asserted on the outputs. The outputs are put in the high impedance state when either  $\overline{CE}$  or  $\overline{OE}$  is high. This dual-line control gives designers flexibility in preventing bus contention in their system.

### 5.2 Byte Write

A low pulse on the  $\overline{WE}$  or  $\overline{CE}$  input with  $\overline{CE}$  or  $\overline{WE}$  low (respectively) and  $\overline{OE}$  high initiates a write cycle. The address is latched on the falling edge of  $\overline{CE}$  or  $\overline{WE}$ , whichever occurs last. The data is latched by the first rising edge of  $\overline{CE}$  or  $\overline{WE}$ . Once a byte write has been started, it will automatically time itself to completion. Once a programming operation has been initiated and for the duration of  $t_{WC}$ , a read operation will effectively be a polling operation.

### 5.3 Page Write

The page write operation of the AT28BV256 allows 1 to 64 bytes of data to be written into the device during a single internal programming period. A page write operation is initiated in the same manner as a byte write; the first byte written can then be followed by 1 to 63 additional bytes. Each successive byte must be written within 150  $\mu$ s ( $t_{BLC}$ ) of the previous byte. If the  $t_{BLC}$  limit is exceeded the AT28BV256 will cease accepting data and commence the internal programming operation. All bytes during a page write operation must reside on the same page as defined by the state of the A6 - A14 inputs. For each  $\overline{WE}$  high to low transition during the page write operation, A6 - A14 must be the same.

The A0 to A5 inputs are used to specify which bytes within the page are to be written. The bytes may be loaded in any order and may be altered within the same load period. Only bytes which are specified for writing will be written; unnecessary cycling of other bytes within the page does not occur.

### 5.4 Data Polling

The AT28BV256 features Data Polling to indicate the end of a write cycle. During a byte or page write cycle, an attempted read of the last byte written will result in the complement of the written data to be presented on I/O7. Once the write cycle has been completed, true data is valid on all outputs, and the next write cycle may begin. Data Polling may begin at anytime during the write cycle.

### 5.5 Toggle Bit

In addition to Data Polling, the AT28BV256 provides another method for determining the end of a write cycle. During the write operation, successive attempts to read data from the device will result in I/O6 toggling between one and zero. Once the write has completed, I/O6 will stop toggling and valid data will be read. Reading the toggle bit may begin at any time during the write cycle.

#### 5.6 Data Protection

If precautions are not taken, inadvertent writes may occur during transitions of the host system power supply. Atmel<sup>®</sup> has incorporated both hardware and software features that will protect the memory against inadvertent writes.

## 4 AT28BV256

#### 5.6.1 Hardware Protection

Hardware features protect against inadvertent writes to the AT28BV256 in the following ways: (a)  $V_{CC}$  power-on delay – once  $V_{CC}$  has reached 1.8V (typical) the device will automatically time out 10 ms (typical) before allowing a write; (b) write inhibit – holding any one of  $\overline{OE}$  low,  $\overline{CE}$  high or  $\overline{WE}$  high inhibits write cycles; and (c) noise filter – pulses of less than 15 ns (typical) on the  $\overline{WE}$  or  $\overline{CE}$  inputs will not initiate a write cycle.

#### 5.6.2 Software Data Protection

A software-controlled data protection feature has been implemented on the AT28BV256. Software data protection (SDP) helps prevent inadvertent writes from corrupting the data in the device. SDP can prevent inadvertent writes during power-up and power-down as well as any other potential periods of system instability.

The AT28BV256 can only be written using the software data protection feature. A series of three write commands to specific addresses with specific data must be presented to the device before writing in the byte or page mode. The same three write commands must begin each write operation. All software write commands must obey the page mode write timing specifications. The data in the 3-byte command sequence is not written to the device; the address in the command sequence can be utilized just like any other location in the device.

Any attempt to write to the device without the 3-byte sequence will start the internal write timers. No data will be written to the device; however, for the duration of  $t_{WC}$ , read operations will effectively be polling operations.

#### 5.7 Device Identification

An extra 64 bytes of EEPROM memory are available to the user for device identification. By raising A9 to 12V  $\pm 0.5$ V and using address locations 7FC0H to 7FFFH the additional bytes may be written to or read from in the same manner as the regular memory array.





# 6. DC and AC Operating Range

	AT28BV256-20
Operating Temperature (Case)	-40°C - 85°C
V <sub>CC</sub> Power Supply	2.7V - 3.6V

# 7. Operating Modes

Mode	CE	ŌĒ	WE	I/O
Read	V <sub>IL</sub>	V <sub>IL</sub>	V <sub>IH</sub>	D <sub>OUT</sub>
Write <sup>(2)</sup>	V <sub>IL</sub>	V <sub>IH</sub>	V <sub>IL</sub>	D <sub>IN</sub>
Standby/Write Inhibit	V <sub>IH</sub>	X <sup>(1)</sup>	X	High Z
Write Inhibit	Х	Х	V <sub>IH</sub>	
Write Inhibit	Х	V <sub>IL</sub>	Х	
Output Disable	X	V <sub>IH</sub>	Х	High Z
Chip Erase	V <sub>IL</sub>	V <sub>H</sub> <sup>(3)</sup>	V <sub>IL</sub>	High Z

Notes: 1. X can be V<sub>IL</sub> or V<sub>IH</sub>.

2. Refer to AC programming waveforms.

3.  $V_H = 12.0V \pm 0.5V$ .


### 8. DC Characteristics

Symbol	Parameter	Condition	Min	Max	Units
ILI	Input Load Current	$V_{IN} = 0V$ to $V_{CC} + 1V$		10	μA
I <sub>LO</sub>	Output Leakage Current	$V_{I/O} = 0V \text{ to } V_{CC}$		10	μΑ
I <sub>SB</sub>	V <sub>CC</sub> Standby Current CMOS	$\overline{\text{CE}} = \text{V}_{\text{CC}} - 0.3 \text{V to V}_{\text{CC}} + 1 \text{V}$		50	μA
I <sub>CC</sub>	V <sub>CC</sub> Active Current	f = 5 MHz; I <sub>OUT</sub> = 0 mA		15	mA
V <sub>IL</sub>	Input Low Voltage			0.6	V
V <sub>IH</sub>	Input High Voltage		2.0		V
V <sub>OL</sub>	Output Low Voltage	I <sub>OL</sub> = 1.6 mA		0.3	V
V <sub>OH</sub>	Output High Voltage	I <sub>OH</sub> = -100 μA	2.0		V

### 9. AC Read Characteristics

		AT28B	AT28BV256-20	
Symbol	Parameter	Min	Max	Units
t <sub>ACC</sub>	Address to Output Delay		200	ns
t <sub>CE</sub> <sup>(1)</sup>	CE to Output Delay		200	ns
t <sub>OE</sub> <sup>(2)</sup>	OE to Output Delay	0	80	ns
t <sub>DF</sub> <sup>(3)(4)</sup>	CE or OE to Output Float	0	55	ns
t <sub>OH</sub>	Output Hold from $\overline{OE}$ , $\overline{CE}$ or Address, whichever occurred first	0		ns

# 10. AC Read Waveforms<sup>(1)(2)(3)(4)</sup>

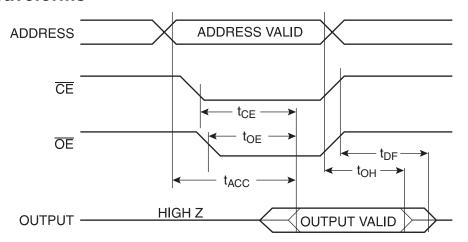


Notes: 1.  $\overline{CE}$  may be delayed up to  $t_{ACC}$  -  $t_{CE}$  after the address transition without impact on  $t_{ACC}$ .


- 2.  $\overline{\text{OE}}$  may be delayed up to  $t_{\text{CE}}$   $t_{\text{OE}}$  after the falling edge of  $\overline{\text{CE}}$  without impact on  $t_{\text{CE}}$  or by  $t_{\text{ACC}}$   $t_{\text{OE}}$  after an address change without impact on  $t_{\text{ACC}}$ .
- 3.  $t_{DF}$  is specified from  $\overline{OE}$  or  $\overline{CE}$  whichever occurs first ( $C_L = 5 \text{ pF}$ ).
- 4. This parameter is characterized and is not 100% tested.



# 11. Input Test Waveforms and Measurement Level



# 12. Output Test Load



### 13. Pin Capacitance

 $f = 1 \text{ MHz}, T = 25^{\circ}C^{(1)}$ 

Symbol	Тур	Max	Units	Conditions
C <sub>IN</sub>	4	6	pF	$V_{IN} = 0V$
C <sub>OUT</sub>	8	12	pF	$V_{OUT} = 0V$

Note: 1. This parameter is characterized and is not 100% tested.


### 14. AC Write Characteristics

Symbol	Parameter	Min	Max	Units
t <sub>AS</sub> , t <sub>OES</sub>	Address, OE Set-up Time	0		ns
t <sub>AH</sub>	Address Hold Time	50		ns
t <sub>CS</sub>	Chip Select Set-up Time	0		ns
t <sub>CH</sub>	Chip Select Hold Time	0		ns
t <sub>WP</sub>	Write Pulse Width (WE or CE)	200		ns
t <sub>DS</sub>	Data Set-up Time	50		ns
t <sub>DH</sub> , t <sub>OEH</sub>	Data, $\overline{\text{OE}}$ Hold Time	0		ns
t <sub>DV</sub>	Time to Data Valid	NR <sup>(1)</sup>		


Note: 1. NR = No Restriction.

### 15. AC Write Waveforms

### 15.1 WE Controlled

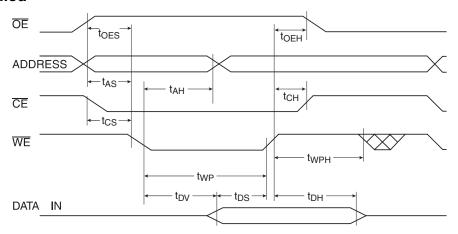

### 15.2 **CE** Controlled

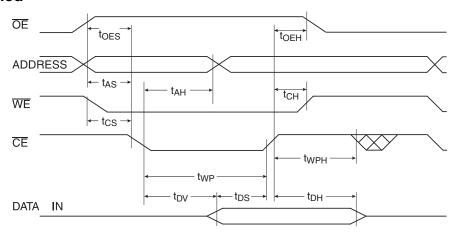






### 16. Page Mode Characteristics

Symbol	Parameter	Min	Max	Units
t <sub>WC</sub>	Write Cycle Time		10	ms
t <sub>AS</sub>	Address Set-up Time	0		ns
t <sub>AH</sub>	Address Hold Time	50		ns
t <sub>DS</sub>	Data Set-up Time	50		ns
t <sub>DH</sub>	Data Hold Time	0		ns
t <sub>WP</sub>	Write Pulse Width	200		ns
t <sub>BLC</sub>	Byte Load Cycle Time		150	μs
t <sub>WPH</sub>	Write Pulse Width High	100		ns

# 17. Programming Algorithm<sup>(1)(2)(3)</sup>




Notes: 1. Data Format: I/O7 - I/O0 (Hex); Address Format: A14 - A0 (Hex).

2. Data protect state will be re-activated at the end of program cycle.

3. 1 to 64 bytes of data are loaded.

## 18. Software Protected Program Cycle Waveforms<sup>(1)(2)(3)</sup>

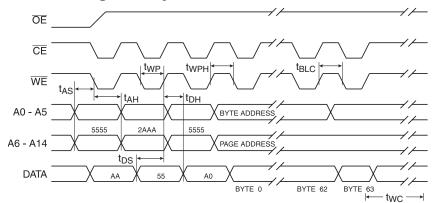

Notes: 1. A0 - A14 must conform to the addressing sequence for the first three bytes as shown above.

- 2. A6 through A14 must specify the same page address during each high to low transition of WE (or CE) after the software code has been entered.
- 3.  $\overline{OE}$  must be high only when  $\overline{WE}$  and  $\overline{CE}$  are both low.


# 19. Data Polling Characteristics<sup>(1)</sup>

Symbol	Parameter	Min	Тур	Max	Units
t <sub>DH</sub>	Data Hold Time	0			ns
t <sub>OEH</sub>	OE Hold Time	0			ns
t <sub>OE</sub>	OE to Output Delay <sup>(2)</sup>				ns
t <sub>WR</sub>	Write Recovery Time	0			ns

Notes: 1. These parameters are characterized and not 100% tested.

2. See "AC Read Characteristics" on page 7.

# 20. Data Polling Waveforms

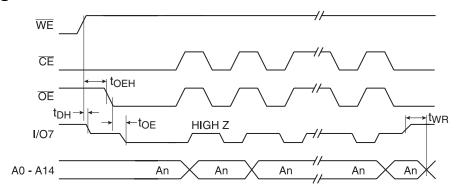


# 21. Toggle Bit Characteristics<sup>(1)</sup>

Symbol	Parameter	Min	Тур	Max	Units
t <sub>DH</sub>	Data Hold Time	10			ns
t <sub>OEH</sub>	OE Hold Time	10			ns
t <sub>OE</sub>	OE to Output Delay <sup>(2)</sup>				ns
t <sub>OEHP</sub>	OE High Pulse	150			ns
t <sub>WR</sub>	Write Recovery Time	0			ns

Notes: 1. These parameters are characterized and not 100% tested.

2. See "AC Read Characteristics" on page 7.

### 22. Toggle Bit Waveforms

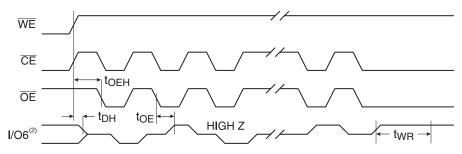

Notes: 1. Toggling either  $\overline{OE}$  or  $\overline{CE}$  or both  $\overline{OE}$  and  $\overline{CE}$  will operate toggle bit.


- 2. Beginning and ending state of I/O6 will vary.
- 3. Any address location may be used but the address should not vary.






# 23. Normalized $I_{CC}$ Graphs


# NORMALIZED SUPPLY CURRENT vs. TEMPERATURE



# NORMALIZED SUPPLY CURRENT vs. ADDRESS FREQUENCY



# NORMALIZED SUPPLY CURRENT vs. SUPPLY VOLTAGE



# 24. Ordering Information

### 25. Standard Package

t <sub>ACC</sub>	I <sub>CC</sub> (mA)				
(ns)	Active	Standby	Ordering Code	Package	<b>Operation Range</b>
200	15 0.02		AT28BV256-20JI AT28BV256-20PI	32J 28P6	Industrial
		AT28BV256-20SI	28S	(-40° to 85°C)	
		AT28BV256-20TI	28T		

Note: 1. See Valid Part Numbers table below.

### 26. Green Package Option (Pb/Halide-free)

t <sub>ACC</sub>	I <sub>CC</sub> (mA)				
(ns)			Ordering Code	Package	Operation Range
		15 0.00	AT28BV256-20JU	32J	
200	15 0.02		AT28BV256-20TU	28T	Industrial
200		AT28BV256-20SU	27S	(-40° to 85°C)	
			AT28BV256-20PU	28T	

### 27. Valid Part Numbers

The following table lists standard Atmel products that can be ordered.

Device Numbers	Speed	Package and Temperature Combinations
AT28BV256	20	JI, PI, SI, TI, TU, JU, SU, PU

### 28. Die Products

Reference Section: Parallel EEPROM Die Products


Package Type				
32J	32-lead, Plastic J-leaded Chip Carrier (PLCC)			
28P6	28-lead, 0.600" Wide, Plastic Dual Inline Package (PDIP)			
28\$	28-lead, 0.300" Wide, Plastic Gull Wing Small Outline (SOIC)			
28T	28-lead, Plastic Thin Small Outline Package (TSOP)			





# 29. Packaging Information

#### **32J - PLCC** 29.1

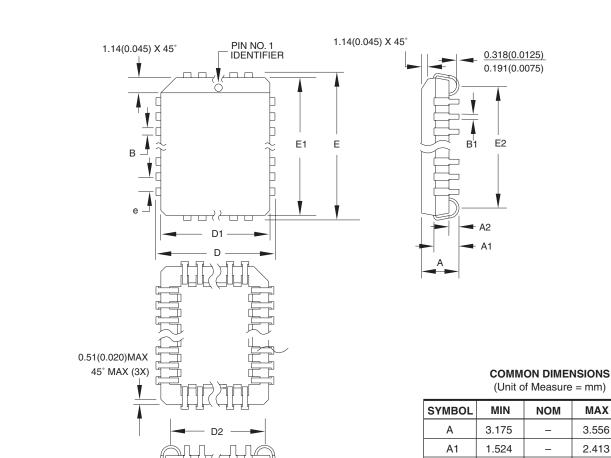

Notes:

- 1. This package conforms to JEDEC reference MS-016, Variation AE.
- 2. Dimensions D1 and E1 do not include mold protrusion. Allowable protrusion is .010"(0.254 mm) per side. Dimension D1 and E1 include mold mismatch and are measured at the extreme material condition at the upper or lower parting line.
- 3. Lead coplanarity is 0.004" (0.102 mm) maximum.

SYMBOL	MIN	NOM	MAX	NOTE
Α	3.175	_	3.556	
A1	1.524	_	2.413	
A2	0.381	_	_	
D	12.319	_	12.573	
D1	11.354	_	11.506	Note 2
D2	9.906	_	10.922	
Е	14.859	_	15.113	
E1	13.894	_	14.046	Note 2
E2	12.471	_	13.487	
В	0.660	_	0.813	
B1	0.330	_	0.533	
е	1.270 TYP			


10/04/01


<u>AIMEL</u>	2325 Orchard San Jose, CA	Parkway 95131


IIILE	
<b>32J</b> , 32-lead,	Plastic J-leaded Chip Carrier (PLCC)

DRAWING NO.	REV
32J	В

#### 29.2 28P6 - PDIP



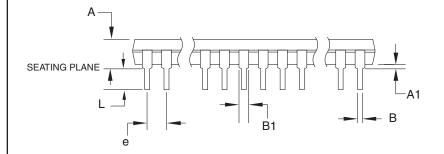



Notes:

- 1. This package conforms to JEDEC reference MS-011, Variation AB.
- 2. Dimensions D and E1 do not include mold Flash or Protrusion. Mold Flash or Protrusion shall not exceed 0.25 mm (0.010").

#### **COMMON DIMENSIONS**

(Unit of Measure = mm)

MIN	NOM	MAX	NOTE
_			HOIL
	-	4.826	
0.381	_	_	
36.703	_	37.338	Note 2
15.240	1	15.875	
13.462	-	13.970	Note 2
0.356	_	0.559	
1.041	_	1.651	
3.048	_	3.556	
0.203	1	0.381	
15.494	_	17.526	
	2.540 TYP	,	
	36.703 15.240 13.462 0.356 1.041 3.048 0.203 15.494	36.703 – 15.240 – 13.462 – 0.356 – 1.041 – 3.048 – 0.203 –	0.381     -     -       36.703     -     37.338       15.240     -     15.875       13.462     -     13.970       0.356     -     0.559       1.041     -     1.651       3.048     -     3.556       0.203     -     0.381

09/28/01

4 mei	2325
AIIIEL	San

2325 Orchard Parkway San Jose, CA 95131 **TITLE**28P6, 28-lead (0.600"/15.24 mm Wide) Plastic Dual Inline Package (PDIP)

DRAWING NO. 28P6

В

REV.






### 29.3 28S - SOIC

Dimensions in Millimeters and (Inches). Controlling dimension: Millimeters. 0.51(0.020) 0.33(0.013) 7.60(0.2992) 10.65(0.419) 7.40(0.2914)  $\overline{10.00(0.394)}$ PIN 1 ID 1.27(0.50) BSC TOP VIEW 18.10(0.7125) 2.65(0.1043) 17.70(0.6969) 2.35(0.0926) 0.30(0.0118) 0.10(0.0040) SIDE VIEWS 0° ~ 8° 0.32(0.0125) 0.23(0.0091) 1.27(0.050) 0.40(0.016) 8/4/03 DRAWING NO. TITLE REV. 2325 Orchard Parkway 28S, 28-lead, 0.300" Body, Plastic Gull Wing Small Outline (SOIC) **28S** В San Jose, CA 95131 JEDEC Standard MS-013

**AT28BV256** 

### 29.4 28T - TSOP

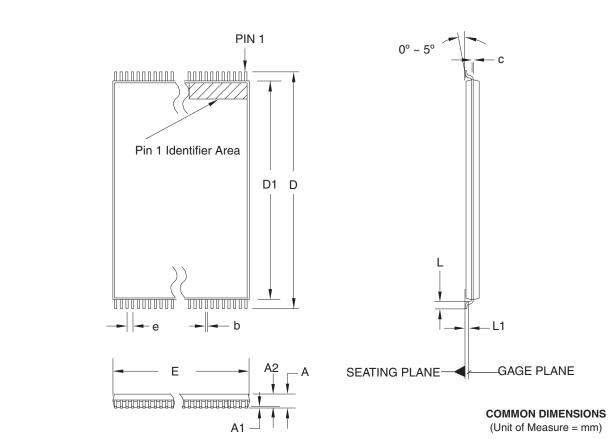

Notes:

- 1. This package conforms to JEDEC reference MO-183.
- 2. Dimensions D1 and E do not include mold protrusion. Allowable protrusion on E is 0.15 mm per side and on D1 is 0.25 mm per side.
- 3. Lead coplanarity is 0.10 mm maximum.

(= ,						
MIN	NOM	MAX	NOTE			
-	-	1.20				
0.05	ı	0.15				
0.90	1.00	1.05				
13.20	13.40	13.60				
11.70	11.80	11.90	Note 2			
7.90	8.00	8.10	Note 2			
0.50	0.60	0.70				
0.25 BASIC						
0.17	0.22	0.27				
0.10	_	0.21				
0.55 BASIC						
	- 0.05 0.90 13.20 11.70 7.90 0.50	0.05 - 0.90 1.00 13.20 13.40 11.70 11.80 7.90 8.00 0.50 0.60 0.25 BASIC 0.17 0.22 0.10 -	-         -         1.20           0.05         -         0.15           0.90         1.00         1.05           13.20         13.40         13.60           11.70         11.80         11.90           7.90         8.00         8.10           0.50         0.60         0.70           0.25 BASIC           0.17         0.22         0.27           0.10         -         0.21			

12/06/02

	<u>AIMEL</u>	2325 Orchard Parkway San Jose, CA 95131	<b>28T</b> , 28-lead (8 x 13.4 mm) Plastic Thin Small Outline Package, Type I (TSOP)
- 1			

DRAWING NO. REV.





### **Atmel Corporation**

2325 Orchard Parkway San Jose, CA 95131, USA Tel: 1(408) 441-0311

Fax: 1(408) 487-2600

#### Regional Headquarters

#### Europe

Atmel Sarl

Route des Arsenaux 41 Case Postale 80 CH-1705 Fribourg Switzerland

Tel: (41) 26-426-5555 Fax: (41) 26-426-5500

#### Asia

Room 1219 Chinachem Golden Plaza 77 Mody Road Tsimshatsui East Kowloon Hong Kong

Tel: (852) 2721-9778 Fax: (852) 2722-1369

#### Japan

9F, Tonetsu Shinkawa Bldg. 1-24-8 Shinkawa Chuo-ku, Tokyo 104-0033 Japan

Tel: (81) 3-3523-3551 Fax: (81) 3-3523-7581

#### **Atmel Operations**

#### Memory

2325 Orchard Parkway San Jose, CA 95131, USA Tel: 1(408) 441-0311 Fax: 1(408) 436-4314

#### Microcontrollers

2325 Orchard Parkway San Jose, CA 95131, USA Tel: 1(408) 441-0311 Fax: 1(408) 436-4314

La Chantrerie BP 70602 44306 Nantes Cedex 3, France Tel: (33) 2-40-18-18-18

Fax: (33) 2-40-18-19-60

#### ASIC/ASSP/Smart Cards

Zone Industrielle 13106 Rousset Cedex, France Tel: (33) 4-42-53-60-00

Fax: (33) 4-42-53-60-01

1150 East Cheyenne Mtn. Blvd. Colorado Springs, CO 80906, USA

Tel: 1(719) 576-3300 Fax: 1(719) 540-1759

Scottish Enterprise Technology Park Maxwell Building East Kilbride G75 0QR, Scotland

Tel: (44) 1355-803-000 Fax: (44) 1355-242-743

#### RF/Automotive

Theresienstrasse 2 Postfach 3535 74025 Heilbronn, Germany Tel: (49) 71-31-67-0 Fax: (49) 71-31-67-2340

1150 East Cheyenne Mtn. Blvd. Colorado Springs, CO 80906, USA

Tel: 1(719) 576-3300 Fax: 1(719) 540-1759

Biometrics/Imaging/Hi-Rel MPU/ High-Speed Converters/RF Datacom

Avenue de Rochepleine

BP 123

38521 Saint-Egreve Cedex, France

Tel: (33) 4-76-58-30-00 Fax: (33) 4-76-58-34-80

Literature Requests
www.atmel.com/literature

Disclaimer: The information in this document is provided in connection with Atmel products. No license, express or implied, by estoppel or otherwise, to any intellectual property right is granted by this document or in connection with the sale of Atmel products. EXCEPT AS SET FORTH IN ATMEL'S TERMS AND CONDITIONS OF SALE LOCATED ON ATMEL'S WEB SITE, ATMEL ASSUMES NO LIABILITY WHATSOEVER AND DISCLAIMS ANY EXPRESS, IMPLIED OR STATUTORY WARRANTY RELATING TO ITS PRODUCTS INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTY OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, OR NON-INFRINGEMENT. IN NO EVENT SHALL ATMEL BE LIABLE FOR ANY DIRECT, INDIRECT, CONSEQUENTIAL, PUNITIVE, SPECIAL OR INCIDENTAL DAMAGES (INCLUDING, WITHOUT LIMITATION, DAMAGES FOR LOSS OF PROFITS, BUSINESS INTERRUPTION, OR LOSS OF INFORMATION) ARISING OUT OF THE USE OR INABILITY TO USE THIS DOCUMENT, EVEN IF ATMEL HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES. Atmel makes no representations or warranties with respect to the accuracy or completeness of the contents of this document and reserves the right to make changes to specifications and product descriptions at any time without notice. Atmel does not make any commitment to update the information contained herein. Unless specifically provided otherwise, Atmel products are not suitable for, and shall not be used in, automotive applications. Atmel's products are not intended, authorized, or warranted for use as components in applications intended to support or sustain life.

© 2006 Atmel Corporation. All rights reserved. Atmel<sup>®</sup>, logo and combinations thereof, Everywhere You Are<sup>®</sup> and others are registered trademarks or trademarks of Atmel Corporation or its subsidiaries. Other terms and product names may be trademarks of others.

