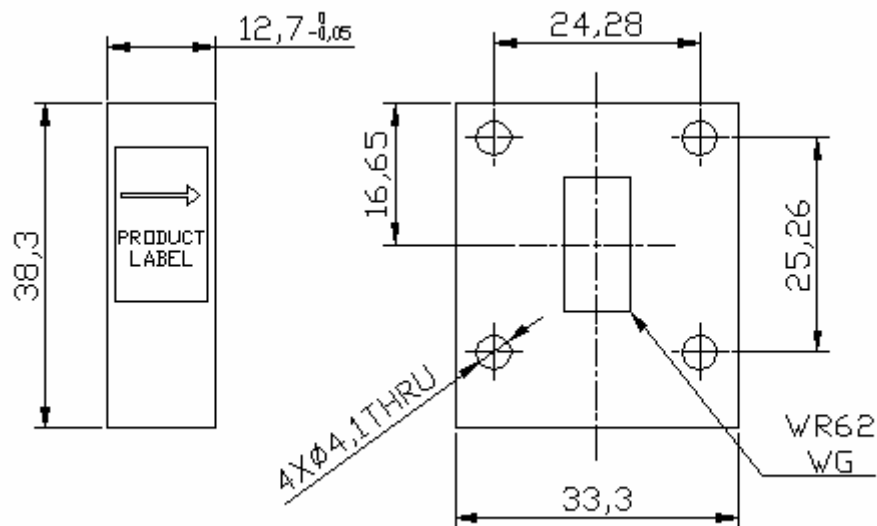


**Key Features:**

- Frequency range: 14.0~18.0GHz, bandwidth upto 700MHz
- WR-62 waveguide, compact size
- Power handling >10Watts CW
- Customer specify center frequency and bandwidth

**Electrical Specifications**

Part No.	Freq Range GHz	Insertion Loss, dB	Reverse Isolation, dB	VSWR	CW Power, Watts	Temp. Range, °C
F3200-1465-05	14.3~15.0	0.38 Max	≥ 21	≤1.2	≥ 10	-40 ~ +80
F3200-1512-04	14.8~15.45	0.38 Max	≥ 21	≤1.2	≥ 10	-40 ~ +80

**Mechanical Structure:**

All units in mm

**Ordering Information:**

F3200-XXXX-XX  
                  ↓                  ↓  
                  Bandwidth, XX%,  
                  ↓  
                  Frequency XX.XX GHz,