

---

## Features

- Eight High Performance Low Dropout Voltage Regulators (LDO)
  - Three Low Dropout Voltage Regulators (LDO) for Analog, Memories and Baseband Digital I/O
  - Two Low Dropout Voltage Regulators (LDO) High PSRR Low Noise for Radio Section
  - Two Low Dropout Voltage Regulators (LDO) Dual Mode High PSRR for Baseband Core Section
- DC to DC 5.6V Converter
- One 4.5V Voltage Regulator
- 10V Supply Generator
- Li-Ion and Ni-Mh Battery Charge Control Interface
- Analog to Digital 8-bit Converter
- Safety Charge Timers
- Power On/Off And Reset Control Logic
- Over And Under-voltage System Shutdown
- Voltage Detectors With Auto Power Off
- On-chip Temperature Sensor
- NTC Programmable Current Bias
- Three Audio Amplifiers
  - 0.5W on 8  $\Omega$  Audio Amplifier for Handsfree
  - Audio Amplifier for Earpieces
  - Audio Amplifier for Car Kit
- Two Backlight LED Drivers for Keyboard and Display
- Two Auxiliary Constant Current Source LED Drivers
- Vibrator Driver
- Two Power Supply Switches
- 32 kHz Crystal Oscillator
- Two Digital to Analog 8-bit Converters
- Serial Peripheral Interface (SPI)
- 100-Thin Fine-pitch Ball Grid Array Package (TFBGA), 9 x 9 mm

## Description

The AT73C201 is a low cost, high performance, fully integrated Battery and Power Management System for Wireless Cellular Terminals.

The AT73C201 integrates all the regulated power supplies needed to power a terminal chipset from a Lithium-Ion or Ni-Mh battery pack to Baseband ICs and Memories, Radio Transceiver, Analog, VCXO, LNA and PA bias and Sim Card in the case of GSM.

Auxiliary low Ron power supply PMOS switches are available from either the battery pack or internal regulated power supplies, providing optimum power management by turning on or off different elements of a handset. The AT73C201 also includes a vibrator motor driver, a set of LED drivers, a smart reset circuit, and a Battery Charger Switch Driver with built-in state machine for safe boot and pre-charge operation.

In addition, a set of 3 Audio Programmable Gain Amplifiers are provided for handsfree (on 8  $\Omega$  Loudspeaker), Earpiece and Car Kit easy interfacing.

The functions are supervised by a set of voltage monitors, timers and a temperature shutdown circuit connected to the internal state machine.

Voltages and on-chip temperatures are also visible from an external pin through a multiplexer for proper connection to the external Baseband ADC.

The AT73C201 is available in a 9x9mm outline, 10x10 ball matrix BGA for optimum size and performance combination. Its very low standby power dissipation and its high noise and PSRR performances make the AT73C201 ideally suitable for recent applications on 2.5G and 3G terminals.



---

## Power Management

---

## AT73C201 Power Supply and Battery Management IC

## Preliminary


2741AS-PMGMT-11/03



Note: This is a summary document. A complete document is not available at this time. For more information, please contact your local Atmel sales office.

# Functional Diagram

Figure 1. AT73C201 Functional Diagram

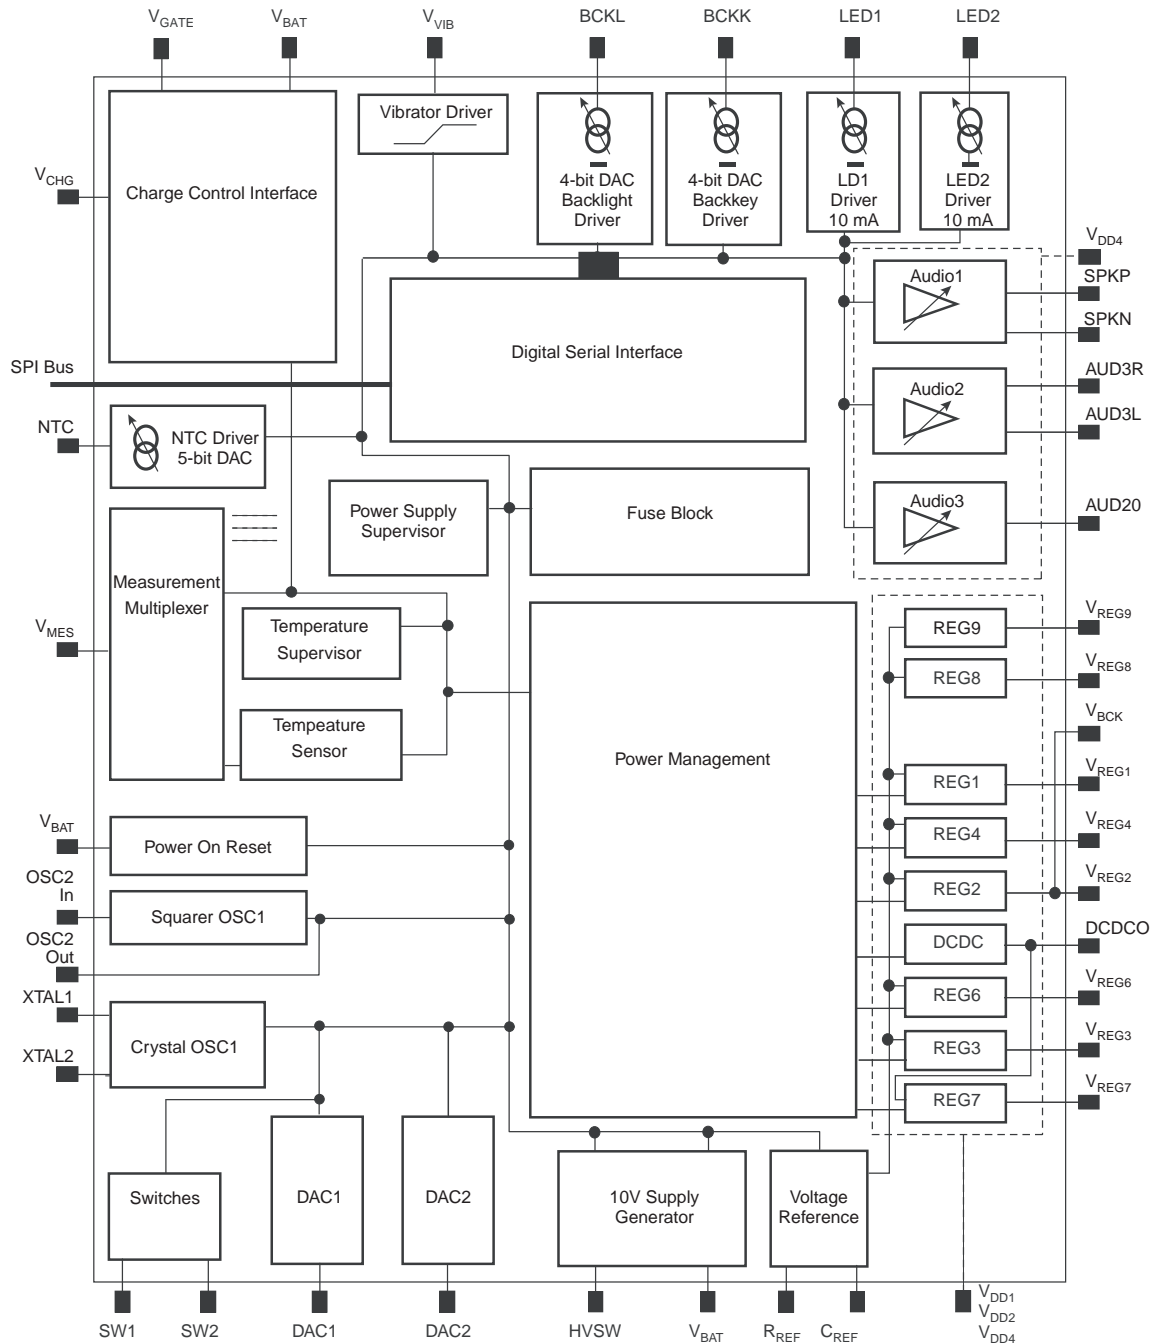



## Atmel Corporation

2325 Orchard Parkway  
San Jose, CA 95131, USA  
Tel: 1(408) 441-0311  
Fax: 1(408) 487-2600

## Regional Headquarters

### Europe

Atmel Sarl  
Route des Arsenaux 41  
Case Postale 80  
CH-1705 Fribourg  
Switzerland  
Tel: (41) 26-426-5555  
Fax: (41) 26-426-5500

### Asia

Room 1219  
Chinachem Golden Plaza  
77 Mody Road Tsimshatsui  
East Kowloon  
Hong Kong  
Tel: (852) 2721-9778  
Fax: (852) 2722-1369

### Japan

9F, Tonetsu Shinkawa Bldg.  
1-24-8 Shinkawa  
Chuo-ku, Tokyo 104-0033  
Japan  
Tel: (81) 3-3523-3551  
Fax: (81) 3-3523-7581

## Atmel Operations

### Memory

2325 Orchard Parkway  
San Jose, CA 95131, USA  
Tel: 1(408) 441-0311  
Fax: 1(408) 436-4314

### Microcontrollers

2325 Orchard Parkway  
San Jose, CA 95131, USA  
Tel: 1(408) 441-0311  
Fax: 1(408) 436-4314

La Chantreterie  
BP 70602  
44306 Nantes Cedex 3, France  
Tel: (33) 2-40-18-18-18  
Fax: (33) 2-40-18-19-60

### ASIC/ASSP/Smart Cards

Zone Industrielle  
13106 Rousset Cedex, France  
Tel: (33) 4-42-53-60-00  
Fax: (33) 4-42-53-60-01

1150 East Cheyenne Mtn. Blvd.  
Colorado Springs, CO 80906, USA  
Tel: 1(719) 576-3300  
Fax: 1(719) 540-1759

Scottish Enterprise Technology Park  
Maxwell Building  
East Kilbride G75 0QR, Scotland  
Tel: (44) 1355-803-000  
Fax: (44) 1355-242-743

### RF/Automotive

Theresienstrasse 2  
Postfach 3535  
74025 Heilbronn, Germany  
Tel: (49) 71-31-67-0  
Fax: (49) 71-31-67-2340

1150 East Cheyenne Mtn. Blvd.  
Colorado Springs, CO 80906, USA  
Tel: 1(719) 576-3300  
Fax: 1(719) 540-1759

### Biometrics/Imaging/Hi-Rel MPU/ High Speed Converters/RF Datacom

Avenue de Rochepleine  
BP 123  
38521 Saint-Egreve Cedex, France  
Tel: (33) 4-76-58-30-00  
Fax: (33) 4-76-58-34-80

---

### Literature Requests

[www.atmel.com/literature](http://www.atmel.com/literature)

**Disclaimer:** Atmel Corporation makes no warranty for the use of its products, other than those expressly contained in the Company's standard warranty which is detailed in Atmel's Terms and Conditions located on the Company's web site. The Company assumes no responsibility for any errors which may appear in this document, reserves the right to change devices or specifications detailed herein at any time without notice, and does not make any commitment to update the information contained herein. No licenses to patents or other intellectual property of Atmel are granted by the Company in connection with the sale of Atmel products, expressly or by implication. Atmel's products are not authorized for use as critical components in life support devices or systems.

© Atmel Corporation 2003. All rights reserved. Atmel® and combinations thereof, are the registered trademarks of Atmel Corporation or its subsidiaries. Other terms and product names may be the trademarks of others.



Printed on recycled paper.

2741AS-PMGMT-11/03 0M