


Key Features:

- Wide frequency range: 8.0-18.0GHz partial or full band
- SMA connectorized configuration
- Small size, low cost
- Power handling +5 Watts forward
- Operating temperature -40~+70°C

Electrical Specifications

Part Number	Freq Range GHz	Insertion Loss, dB	Reverse Isolation, dB	VSWR	Forward Power, Watts	Temp. Range, °C
F2210-1000-40	8.0-12.0	0.5 Max	≥ 16	≤ 1.45	≥ 5	-40 ~ +70
F2210-1500-40	12.0-18.0	0.6 Max	≥ 16	≤ 1.45	≥ 5	-40 ~ +70
F2210-1300-77	8.0-18.0	1.0 Max	≥ 16	≤ 1.5	≥ 5	-40 ~ +70

Mechanical Structure:

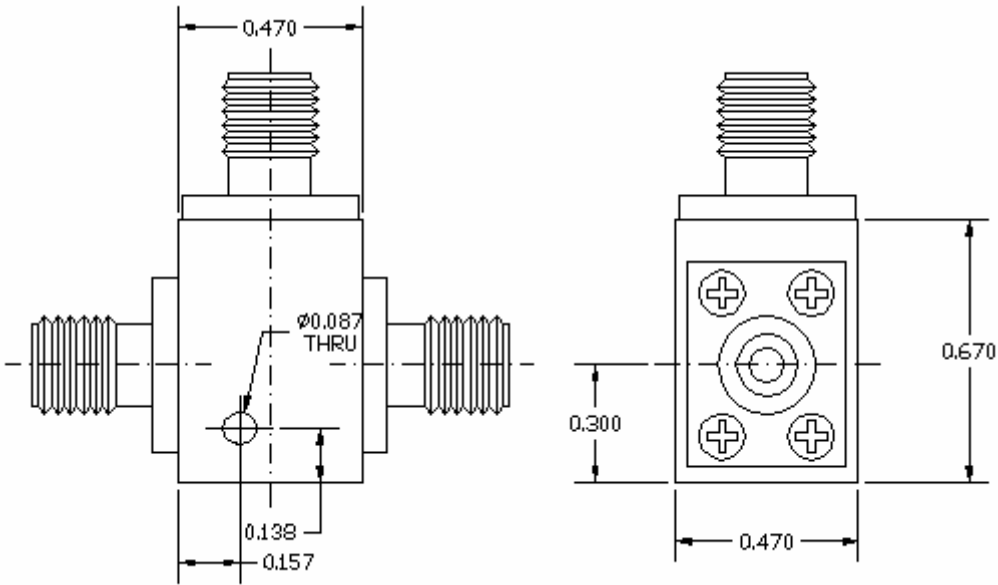

Note: All units in inches

Ordering Information:

