





# SMT POWER INDUCTORS

## Power Beads - PA1682NL Series



-  **Current Rating:** Over 75A<sub>pk</sub>
-  **Inductance Range:** 70nH to 175nH
-  **Height:** 4.0mm Max
-  **Footprint:** 8.0mm x 7.0mm Max

### Electrical Specifications @ 25°C — Operating Temperature -40°C to +130°C<sup>7</sup>



Part Number	Inductance @0A <sub>dc</sub> (nH ±20%)	Inductance @I <sub>rated</sub> (nH TYP)	I <sub>rated</sub> <sup>1</sup> (A <sub>dc</sub> )	DCR <sup>2</sup> (mΩ MAX)	Saturation Current <sup>3</sup> (A TYP)		Heating Current <sup>4</sup> (A TYP)
					25°C	100°C	
PA1682.700NL	70	70	31	0.5 ±8%	63	60	31
PA1682.101NL	100	100	40		46	40	
PA1682.151NL	140	112	28		34	28	
PA1682.181NL	175	140	22		26	22	

#### NOTES:




- The rated current as listed is either the saturation current or the heating current depending on which value is lower.
- The nominal DCR is measured from point (a) to point (b), as shown below on the mechanical drawing.
- The saturation current is the typical current which causes the inductance to drop by 20% at the stated ambient temperatures (25°C and 100°C). This current is determined by placing the component in the specified ambient environment and applying a short duration pulse current (to eliminate self-heating effects) to the component.
- The heating current is the DC current which causes the part temperature to increase by approximately 40°C. This current is determined by soldering the component on a typical application PCB, and then applying the current to the device for 30 minutes with 25LFM of forced air cooling.
- In high volt\*time applications, additional heating in the component can occur due to core losses in the inductor which may necessitate derating the current in order to limit the temperature rise of the component. To determine the approximate total losses (or temperature rise) for a given application, the coreloss and temperature rise curves can be used.
- Optional Tape & Reel packaging can be ordered by adding a "T" suffix to the part number (i.e. PA1682.700NL becomes PA1682.700NLT). Pulse complies to industry standard tape and reel specification EIA481. The tape and reel for this product has a width (W=24mm), pitch (Po=12.0mm) and depth (Ko=4.2mm).
- The temperature of the component (ambient plus temperature rise) must be within the stated operating temperature range.

### Mechanical

### Schematic

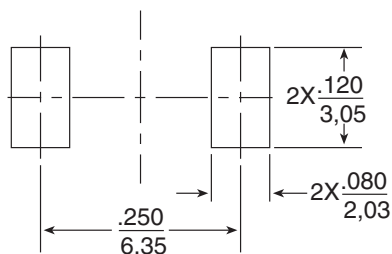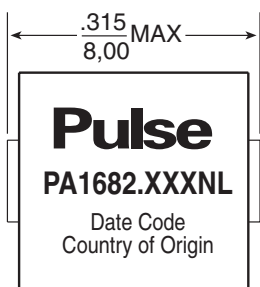


SUGGESTED PAD LAYOUT

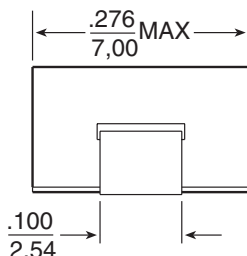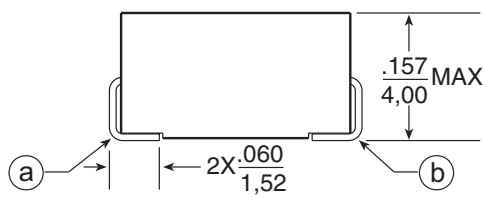


Weight . . . . . 0.94 grams  
 Tape & Reel . . . . . 1200/reel  
 Dimensions: Inches  
                   mm  
 Unless otherwise specified,  
 all tolerances are ± .010  
                                   0,25


### Typical Inducance vs DC Bias @ 25°C

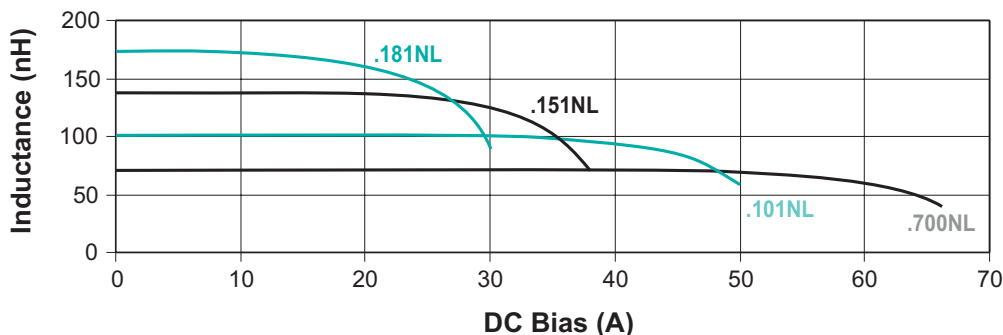


### Typical Inducance vs DC Bias @ 100°C

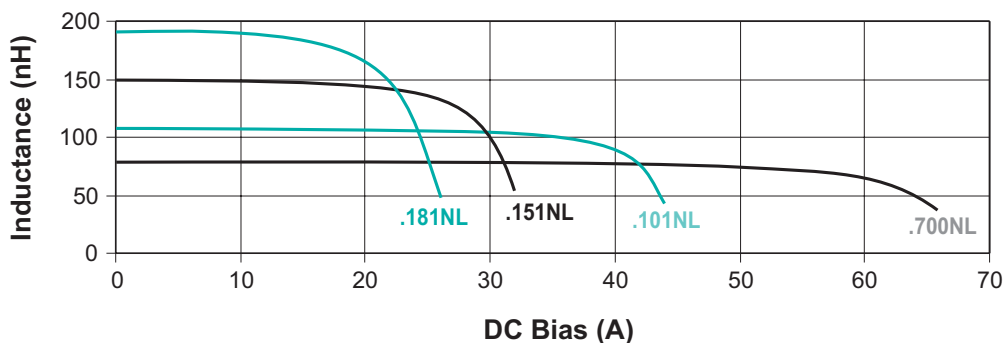

### CoreLoss (W)

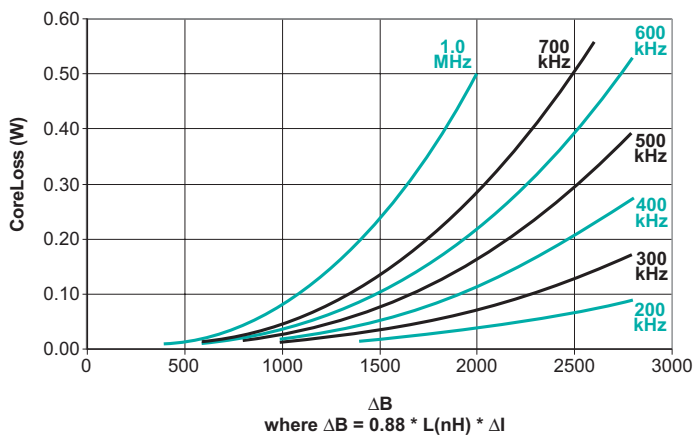

### Temp Rise vs Power Dissipation

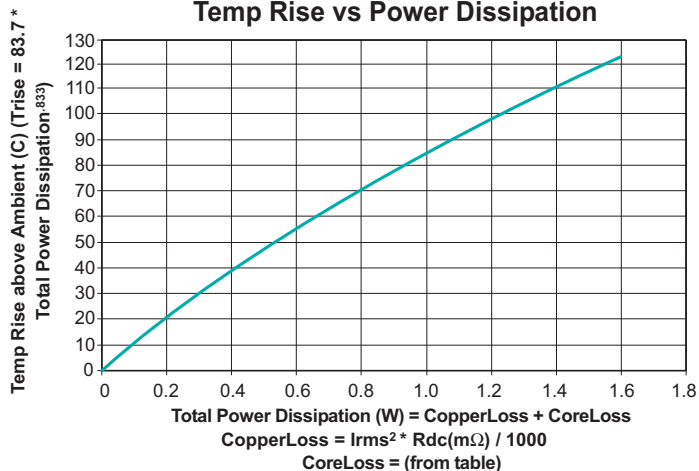

## For More Information:

### Pulse Worldwide Headquarters

12220 World Trade Dr.  
San Diego, CA 92128  
U.S.A.

[www.pulseeng.com](http://www.pulseeng.com)

Tel: 858 674 8100

Fax: 858 674 8262

### Pulse Europe

Einsteinstrasse 1  
D-71083 Herrenberg  
Germany

Tel: 49 7032 7806 0

Fax: 49 7032 7806 12

### Pulse China Headquarters

B402, Shenzhen Academy of  
Aerospace Technology Building  
10th Kejinan Rd.  
High-Tech Zone  
Nanshan District, Shenzhen  
P.R. China 518057

Tel: 86 755 33966678

Fax: 86 755 33966700

### Pulse North China

Room 1503  
XinYin Building  
No. 888 YiShan Rd.  
Shanghai 200233  
China

Tel: 86 21 54643211/2

Fax: 86 21 54643210

### Pulse South Asia

150 Kampong Ampat  
#07-01/02  
KA Centre  
Singapore 368324

Tel: 65 6287 8998

Fax: 65 6280 0080

### Pulse North Asia

No. 26  
Kao Ching Rd.  
Yang Mei Chen  
Taoyuan Hsien  
Taiwan, R. O. C.  
32667

Tel: 886 3 4643715

Fax: 886 3 4641911

Performance warranty of products offered on this data sheet is limited to the parameters specified. Data is subject to change without notice. Other brand and product names mentioned herein may be trademarks or registered trademarks of their respective owners. © Copyright, 2007. Pulse Engineering, Inc. All rights reserved.