




New Product

CAT76235

Broadband, High-Performance 7 Section Attenuator

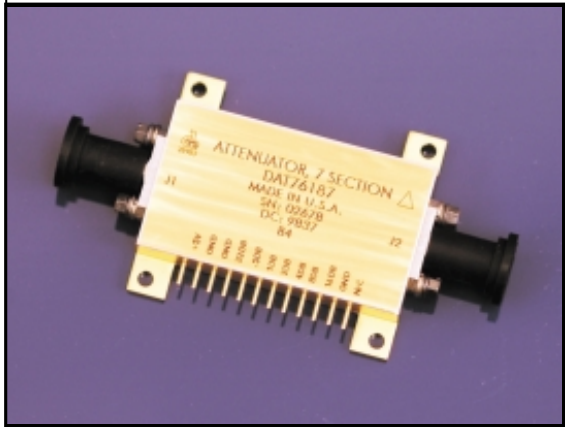

- Operating Frequency: 0.005 GHz to 1.2 GHz
- 63.5 dB Attenuation Range
- 0.5 dB LSB
- Binary Attenuation Bits
- Phase Matched vs. Attenuation
- 60 nanoseconds Switching Speed
- TTL Controls
- Excellent VSWR

Application: Rugged Military Radar