

# PWRLITE LD1010D

## High Performance N-Channel *POWERJFET™* with PN Diodes

### Features

- ❖ Trench Power JFET with low threshold voltage  $V_{th}$ .
- ❖ Device fully "ON" with  $V_{gs} = 0.7V$
- ❖ Optimum for "Low Side" Buck Converters
- ❖ Optimized for Secondary Rectification in isolated DC-DC
- ❖ Low  $R_g$  and low  $C_{ds}$  for high speed switching
- ❖ No "Body Diode"; extremely low  $C_{ds}$
- ❖ Added Fast Recovery Schottky Diode in same package



### Applications

- ❖ DC-DC Converters
- ❖ Synchronous Rectifiers
- ❖ PC Motherboard Converters
- ❖ Step-down power supplies
- ❖ Brick Modules
- ❖ VRM Modules

### Description

The Power JFET transistor from Lovoltech is a device that presents a Low  $R_{ds(on)}$  allowing for improved efficiencies in DC-DC switching applications. The device is designed with a low threshold such that drivers can operate at 5V, which reduces the driver power dissipation and increases the overall efficiency. Lower threshold produces faster turn-on/turn-off, which minimizes the required dead time. The transistor "No Body Diode" provides a very low associated parasitic capacitance  $C_{ds}$ . A Schottky Diode is added for applications where a freewheeling diode is required. Ringing is also reduced so that a lower voltage device may be a better solution.

### DPAK Pin Assignments

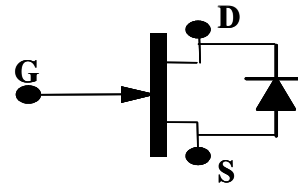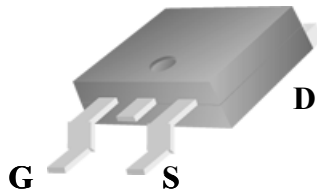

**N – Channel Power JFET  
with PN Diode**

### Pin Definitions

Pin Number	Pin Name	Pin Function Description	Product Summary		
			$V_{DS}$ (V)	$R_{ds(on)}$ ( $\Omega$ )	$I_D$ (A)
1	Gate	<b>Gate.</b> Transistor Gate	24V	0.0045	50
2	Drain	<b>Drain.</b> Transistor Drain			
3	Source	<b>Source.</b> Transistor Source			

### Absolute Maximum Ratings

Parameter	Symbol	Ratings	Units
Drain-Source Voltage	$V_{DS}$	24	V
Gate-Source Voltage	$V_{GS}$	-10	V
Gate-Drain Voltage	$V_{GD}$	-28	V
Continuous Drain Current	$I_D$	50	A
Pulsed Drain Current	$I_D$	100	A
Single Pulse Drain-to-Source Avalanche Energy at 25°C ( $V_{DD}=5V_{DC}$ , $I_L=60A_{PK}$ , $L=0.3mH$ , $R_G=100\Omega$ )	$E_{AS}$	220	mJ
Junction Temperature	$T_J$	-55 to 150°C	°C
Storage Temperature	$T_{STG}$	-65 to 150°C	°C
Lead Soldering Temperature, 10 seconds	T	260°C	°C
Power Dissipation (Derated at 25°C)	$P_D$	80	W

## Thermal Resistance

Symbol	Parameter		DPAK Ratings	Units
$R\Theta_{JA}$	Thermal Resistance Junction-to-Ambient		80	°C/W
$R\Theta_{JC}$	Thermal Resistance Junction-to-Case		1.6	°C/W

## Electrical Specifications

( $T_A = +25^\circ\text{C}$ , unless otherwise noted.)

The  $\phi$  denotes a specification which apply over the full operating temperature range.

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Units
<b>Static</b>						
$BV_{DSX}$	Breakdown Voltage Drain to Source	$I_D = 0.5 \text{ mA}$ $V_{GS} = -4 \text{ V}$	24			V
$BV_{GDO}$	Breakdown Voltage Gate to Drain	$I_G = -50 \mu\text{A}$			-28	V
$BV_{GSO}$	Breakdown Voltage Gate to Source	$I_G = -1 \text{ mA}$		-12	-10	V
$R_{DS(ON)}$	Static Drain to Source <sup>1</sup> On Resistance (Current flows drain-to-source) See Fig. 1	$I_G = 40 \text{ mA}, I_D = 10 \text{ A}$ $I_G = 10 \text{ mA}, I_D = 10 \text{ A}$ $I_G = 5 \text{ mA}, I_D = 10 \text{ A}$		4.0 4.5 4.6	4.5 5.0	$\text{m}\Omega$ $\text{m}\Omega$
$V_{GS(TH)}$	Gate Threshold Voltage	$V_{DS} = 0.1 \text{ V}, I_D = 250 \mu\text{A}$	-1200	-800	-600	mV
<b>Dynamic</b>						
$Q_G$	Total Gate Charge	$\Delta V_{Drive} = 5 \text{ V}, I_D = 10 \text{ A}, V_{DS} = 15 \text{ V}$		20		nC
$Q_{GD}$	Gate to Drain Charge			12		nC
$Q_{GS}$	Gate to Source Charge			1.5		nC
$Q_{SW}$	Switching Charge			13.5		nC
$R_G$	Gate Resistance			0.4		$\Omega$
$T_{D(ON)}$	Turn-on Delay Time	$V_{DD} = 16 \text{ V}, I_D = 15 \text{ A}$ $V_{Drive} = 5 \text{ V}$ Clamped Inductive Load		5		ns
$T_R$	Rise Time			12		
$T_{D(OFF)}$	Turn-off Delay			2		
$T_F$	Fall Time			10		
$C_{ISS}$	Input Capacitance	$V_{DS} = 10 \text{ V}, V_{GS} = -5 \text{ V}, 1 \text{ MHz.}$		3000		pF
$C_{OSS}$	Output Capacitance			900		
$C_{GS}$	Gate-Source Capacitance			2250		
$C_{GD}$	Gate-Drain Capacitance			750		
$C_{DS}$	Drain-Source Capacitance			150		
<b>PN Diode</b>						
$I_R$	Reverse Leakage	$V_R = 20 \text{ V}, V_{GS} = -4 \text{ V}$		0.25	0.3	mA
$V_F$	Forward Voltage	$I_F = 1 \text{ A}$		700		mV
$V_F$	Forward Voltage	$I_F = 10 \text{ A}$		900		mV
$V_F$	Forward Voltage	$I_F = 20 \text{ A}$		1100		mV
$Q_{RR}$	Reverse Recovery Charge	$I_s = 20 \text{ A}, di/dt = 100 \text{ A}/\mu\text{s}$		20		nC

### Notes:

- Pulse width  $\leq 500 \mu\text{s}$ , duty cycle  $\leq 2\%$

## Typical Operating Characteristics

( $T_A = +25^\circ\text{C}$ , unless otherwise noted.)

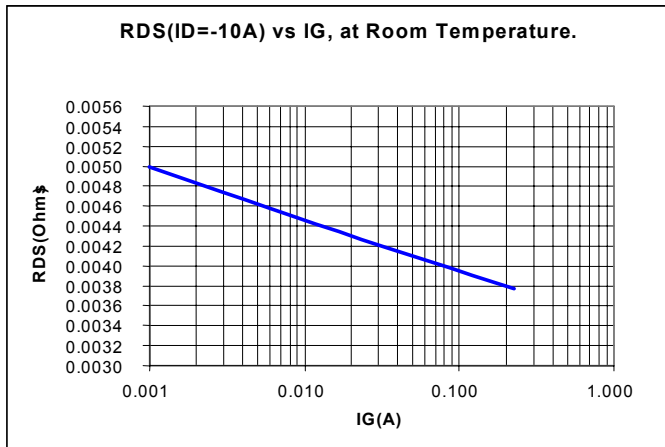


Figure 1 –  $R_{DS(on)}$  vs Gate Current at  $I_D = 10\text{A}$

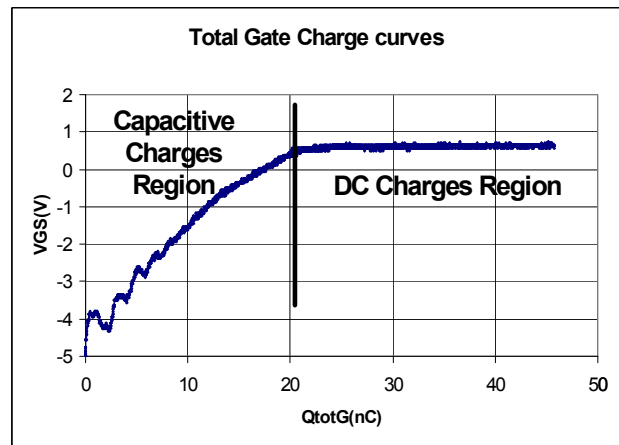


Figure 2 – Total Gate Charge

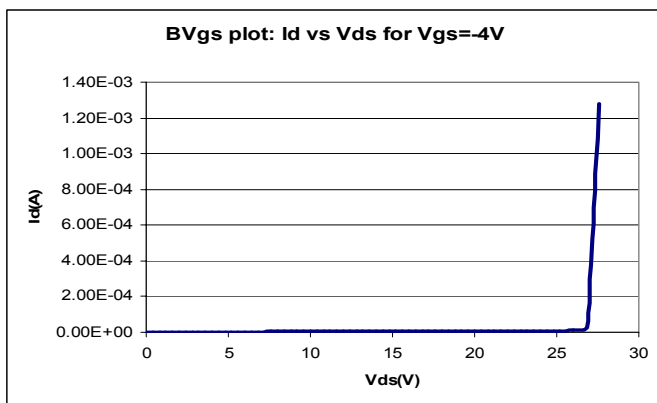


Figure 3 – Breakdown Voltage  $V_{ds}$  vs  $I_d$

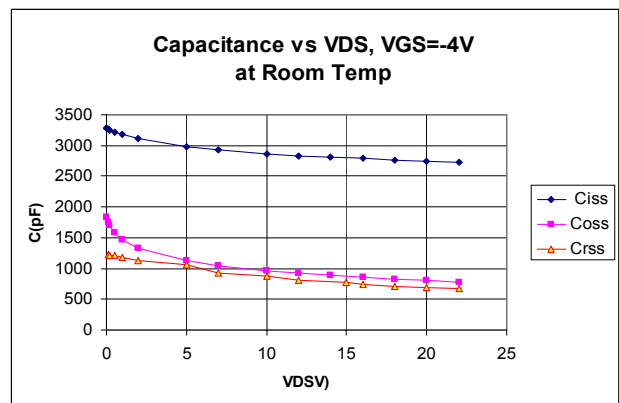


Figure 4 – Capacitance vs Drain Voltage  $V_{ds}$

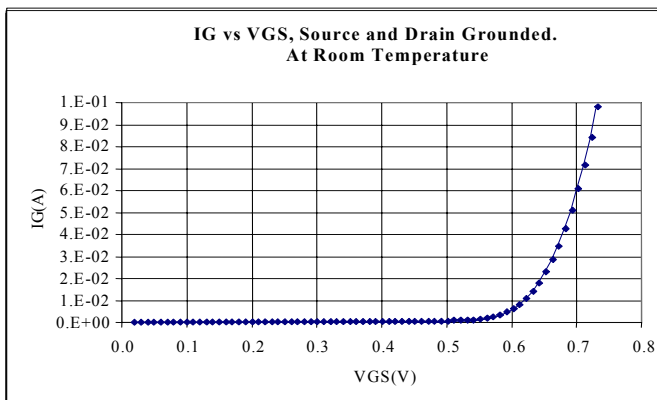


Figure 5 –  $I_G$  vs Gate Voltage  $V_{GS}$

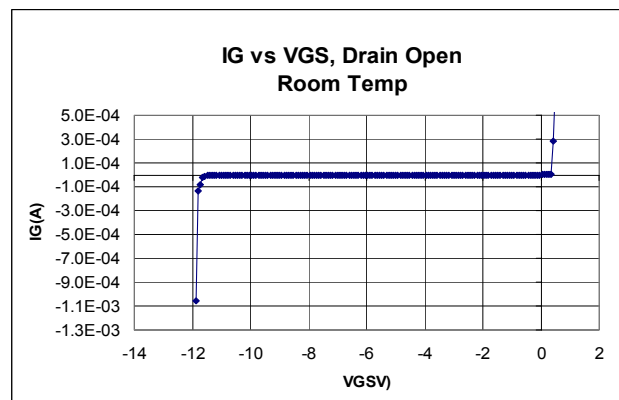


Figure 6 – Typical Gate Voltage Characteristic

## Typical Operating Characteristics

( $T_A = +25^\circ\text{C}$ , unless otherwise noted.)

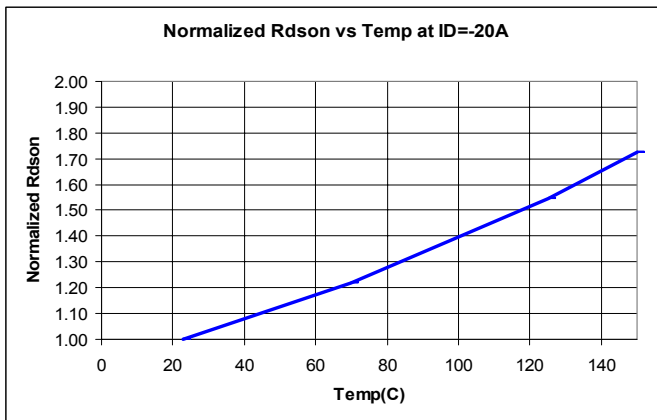


Figure 7 –  $R_{DS(on)}$  Temperature Coefficient

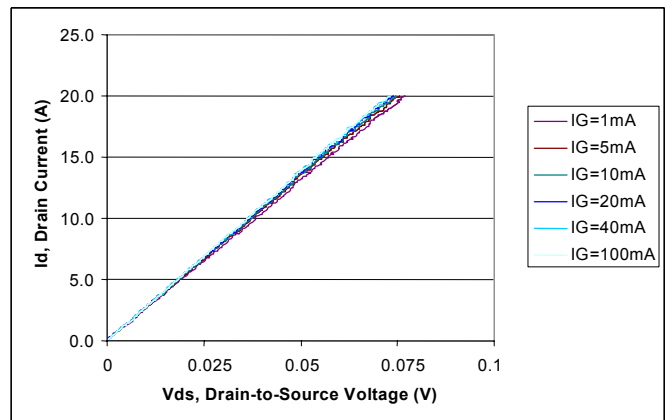


Figure 8 – On-Region Characteristics

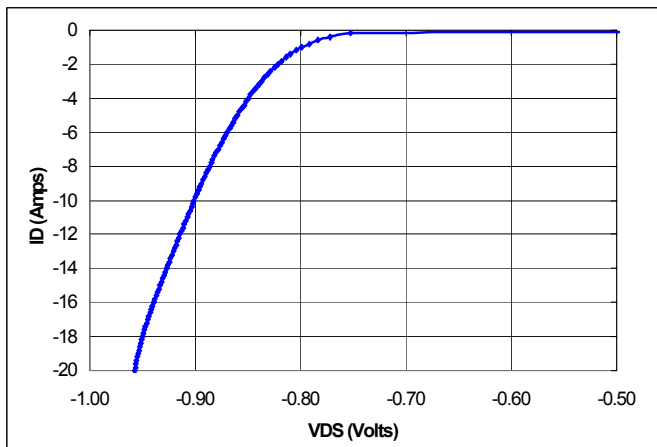


Figure 9 – Diode Voltage vs Current

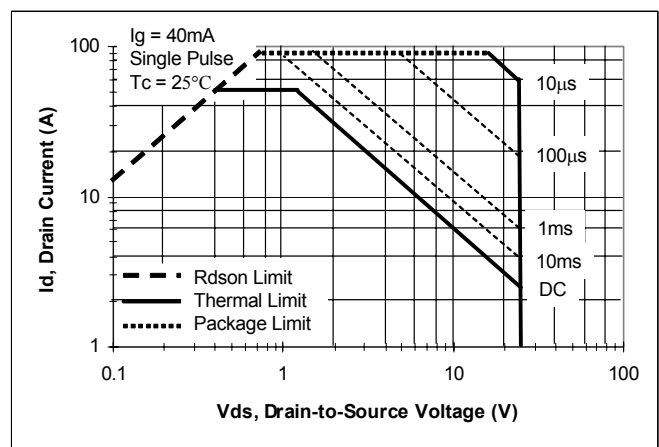


Figure 10 – Safe Operating Area

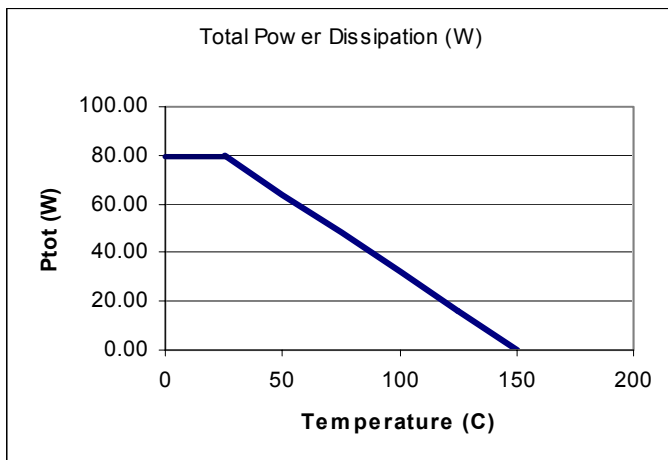


Figure 11 – Total Power Dissipation

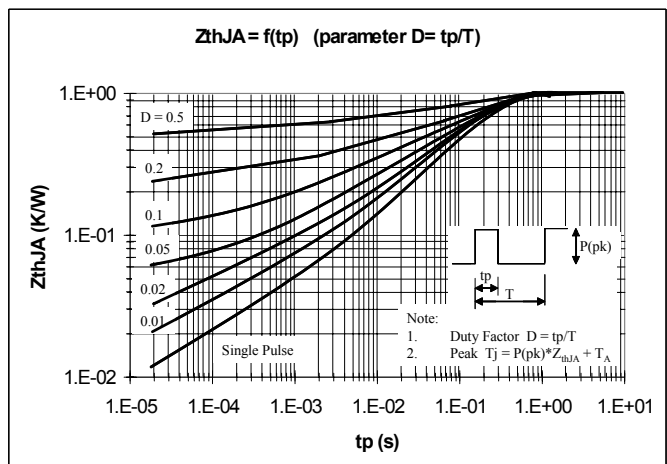


Figure 12 – Normalized Thermal Response


## Ordering Information

Product Number	PN Marking	Package
LD1010D	LD1010D	TO252 (DPAK)

## Package and Marking Information:

### DIMENSIONS

DIM.	mm.			inch		
	TYP.	MIN.	MAX.	TYP.	MIN.	MAX.
A	2.19	2.40		0.086	0.094	
A1	0.89	1.14		0.035	0.045	
A2	0.03	0.13		0.001	0.005	
b	0.76	1.14		0.030	0.045	
b1	0.55	0.90		0.022	0.035	
B2	5.20	5.46		0.205	0.215	
C	0.45	0.60		0.017	0.023	
C2	0.45	0.58		0.017	0.023	
D	5.97	6.22		0.235	0.245	
D1	5.30			0.208		
E	6.35	6.73		0.250	0.265	
e	2.28			0.090		
H	9.35	10.42		0.368	0.410	
L2	0.88	1.27		0.035	0.050	
L3	1.86	3.57		0.073	0.140	
L4	0.64	1.02		0.025	0.040	
R	0.20			0.008		
Alternate						
D	5.40	5.60		0.213	0.220	
L2	1.25	1.75		0.049	0.069	
L3	2.60	2.80		0.102	0.110	
H	9.65	9.75		0.380	0.384	

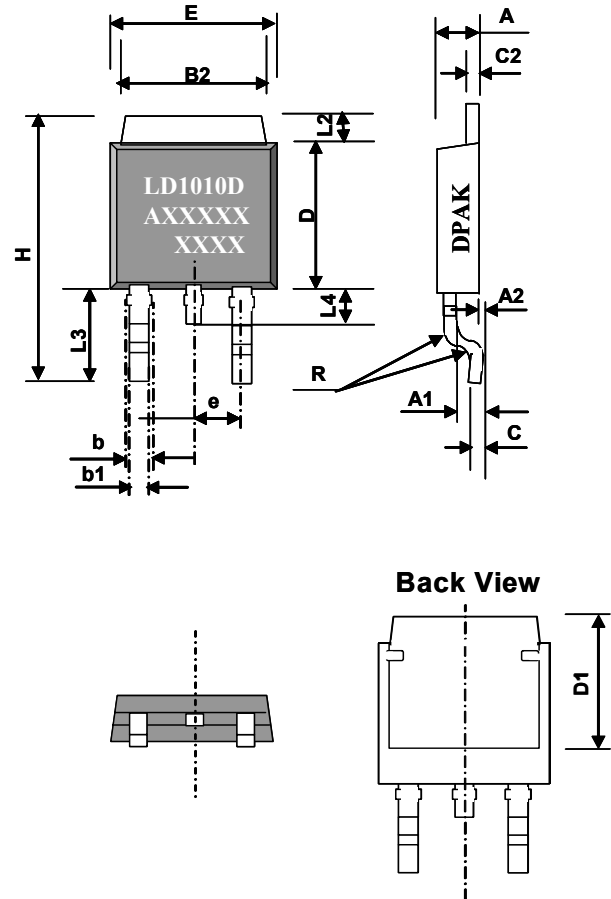

## Life Support Policy

LOVOLTECH's PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT OF LOVOLTECH, Inc. As used herein:

- Life support devices or systems are devices or systems which (a) are intended for surgical implant into the body, or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling can be reasonably expected to result in a significant injury of the user.
- A critical component in any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

Datasheet Identification	Product Status	Definition
Advance Information	In definition or in Design	This datasheet contains the design specifications for product development. Specifications may change without notice.
Preliminary	Initial Production	This datasheet contains preliminary data; additional and application data will be published at a later date. Lovoltech, Inc. reserves the right to make changes at any time without notice in order to improve design.
No Identification Needed	In Production	This datasheet contains final specifications. Lovoltech reserves the right to make changes at any time without notice in order to improve the design.