
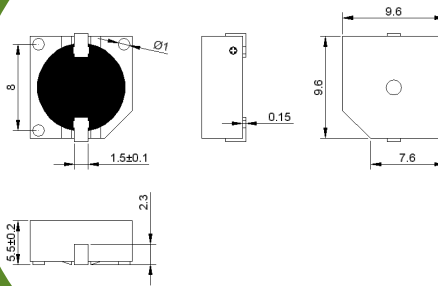


SoniCrest Electro-Magnetic Sound Generators


HCS10AX Series




Dimensions

Unit : mm
Tolerance : ± 0.3 mm

HCS1003AX

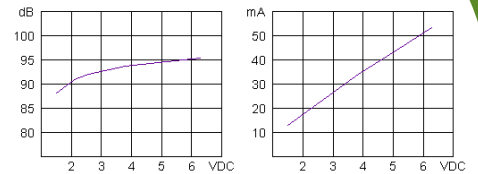

HCS1005AX

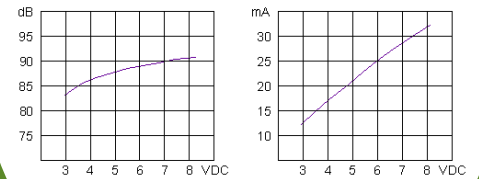

Characteristics Response

Measuring Temperature : 25°C
Measuring Distance : 10cm

Specification (all data taken at 25°C unless otherwise specified)

Model	Rated Voltage (VDC)	Operating Voltage (VDC)	*Rated Current (mA)	*Sound Pressure Level at 10cm (dB)	Generated Frequency (Hz)	Operating Temperature (°C)	Storage Temperature (°C)
HCS1003AX	3	2 ~ 5	≤ 30	≥ 85	2700 \pm 300	-30 ~ +85	-40 ~ +90
HCS1005AX	5	4 ~ 7	≤ 30	≥ 85	2700 \pm 300	-30 ~ +85	-40 ~ +90

*Value Applying Rated Voltage, DC.

www.jlworld.com