



Micro Commercial Components

Micro Commercial Components
 20736 Marilla Street Chatsworth
 CA 91311
 Phone: (818) 701-4933
 Fax: (818) 701-4939

2SA1577
2SA1577-P
2SA1577-Q
2SA1577-R

Features

- Ideally Suited for Automatic Insertion
- Untral Small Surface Mount Package
- Pb-Free Package are Vailable
- Case Material: Molded Plastic. UL Flammability Classification Rating 94V-0 and MSL Rating 1

PNP
Gneral Purpose
Transistors

Maximum Ratings @ $T_a = 25^{\circ}\text{C}$ (unless otherwise noted)

Symbol	Parameter	Value	Unit
I_C	Collector Current	-0.5	A
P_D	Total Device Dissipation	0.2	W
T_J	Junction Temperature	150	$^{\circ}\text{C}$
T_{STG}	Storage Temperature Range	-55 to +150	$^{\circ}\text{C}$

Electrical Characteristics @ 25°C Unless Otherwise Specified

Symbol	Parameter	Min	Max	Unit
OFF CHARACTERISTICS				
$V_{(BR)CEO}$	Collector-Emitter Breakdown Voltage ($I_C = -1\text{mA}, I_B = 0$)	-32		V
$V_{(BR)CBO}$	Collector-Base Breakdown Voltage ($I_C = -100\mu\text{A}, I_E = 0$)	-40		V
$V_{(BR)EBO}$	Collector-Base Breakdown Voltage ($I_E = -100\mu\text{A}, I_C = 0$)	-5.0		V
I_{CBO}	Collector-Base Cutoff Current ($V_{CB} = -20\text{Vdc}, I_E = 0$)		-1	μA
I_{EBO}	Emitter-Base Cutoff Current ($V_{EB} = 4.0\text{Vdc}, I_C = 0$)		-1	μA


ON CHARACTERISTICS

h_{FE}	DC Current Gain ($I_C = -10\text{mA}, V_{CE} = -3.0\text{Vdc}$)	82	390	
$V_{CE(sat)}$	Collector-Emitter Saturation Voltage ($I_C = -0.1\text{A}, I_B = -0.01\text{A}$)		-0.4	Vdc
f_T	Transition Frequency ($V_{CE} = -5\text{Vdc}, I_C = -20\text{mA}, f = 100\text{MHZ}$)		200 (typ)	MHZ
C_{ob}	Collector Output Capacitance ($V_{CB} = -10\text{Vdc}, I_E = 0, f = 1\text{MHZ}$)		7 (typ)	PF

CLASSIFICATION OF h_{FE}


Rank	P	Q	R
Range	82-180	120-270	180-390
Marking	HP	HQ	HR

SOT-323

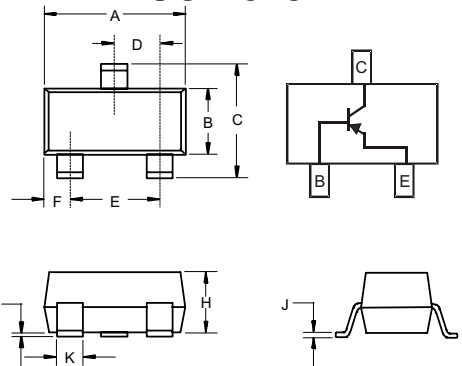

DIM	INCHES		MM		NOTE
	MIN	MAX	MIN	MAX	
A	.071	.087	1.80	2.20	
B	.045	.053	1.15	1.35	
C	.079	.087	2.00	2.20	
D	.026 Nominal		0.65 Nominal		
E	.047	.055	1.20	1.40	
F	.012	.016	.30	.40	
G	.000	.004	.000	.100	
H	.035	.039	.90	1.00	
J	.004	.010	.100	.250	
K	.012	.016	.30	.40	

Suggested Solder Pad Layout





Micro Commercial Components

Ordering Information

Device	Packing
(Part Number)-TP	Tape&Reel;3Kpcs/Reel

IMPORTANT NOTICE

Micro Commercial Components Corp .reserves the right to make changes without further notice to any product herein to make corrections, modifications , enhancements , improvements , or other changes .
Micro Commercial Components Corp .does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights ,nor the rights of others . The user of products in such applications shall assume all risks of such use and will agree to hold *Micro Commercial Components Corp* .and all the companies whose products are represented on our website, harmless against all damages.

APPLICATIONS DISCLAIMER

Products offer by *Micro Commercial Components Corp* . are not intended for use in Medical, Aerospace or Military Applications.

www.mccsemi.com