

TRIPLE DIFFUSED PLANER TYPE
HIGH VOLTAGE, HIGH SPEED SWITCHING

Features

- High voltage, High speed switching
- High reliability

Applications

- Switching regulators
- Ultrasonic generators
- High frequency inverters
- General purpose power amplifiers

Maximum ratings and characteristics

- Absolute maximum ratings (Tc=25°C unless otherwise specified)

Item	Symbol	Ratings	Unit
Collector-Base voltage	V _{CB0}	900	V
Collector-Emitter voltage	V _{CE0}	800	V
Collector-Emitter voltage	V _{CE0(SUS)}	-	V
Emitter-Base voltage	V _{EBO}	10	V
Collector current	I _C	3	A
Base current	I _B	1	A
Collector power dissipation	P _C	80	W
Operating junction temperature	T _j	+150	°C
Storage temperature	T _{stg}	-55 to +150	°C


- Electrical characteristics (T_c =25°C unless otherwise specified)

Item	Symbol	Test Conditions	Min.	Typ.	Max.	Units
Collector-Base voltage	V _{CB0}	I _{CBO} = 1mA	900			V
Collector-Emitter voltage	V _{CE0}	I _{CEO} = 10mA	800			V
Collector-Emitter voltage	V _{CE0(SUS)}		-			V
Emitter-Base voltage	V _{EBO}	I _{EBO} = 1mA	10			V
Collector-Base leakage current	I _{CBO}	V _{CB0} = 900V			1.0	mA
Emitter-Base leakage current	I _{EBO}	V _{EBO} = 10V			1.0	mA
D.C. current gain	h _{FE}	I _C = 1A, V _{CE} = 5V	10			
Collector-Emitter saturation voltage	V _{CE(Sat)}	I _C = 1A, I _B = 0.2A			1.0	V
Base-Emitter saturation voltage	V _{BE(Sat)}				1.5	V
*1	t _{on}	I _C = 2A, I _{B1} = 0.4A			1.0	μs
Switching time	t _{stg}	I _{B2} = -0.8A, R _L = 150 ohm			4.0	μs
	t _f	P _w = 20μs Duty<2%			0.8	μs


- Thermal characteristics

Item	Symbol	Test Conditions	Min.	Typ.	Max.	Units
Thermal resistance	R _{th(j-c)}	Junction to case			1.5	°C/W


Outline Drawings

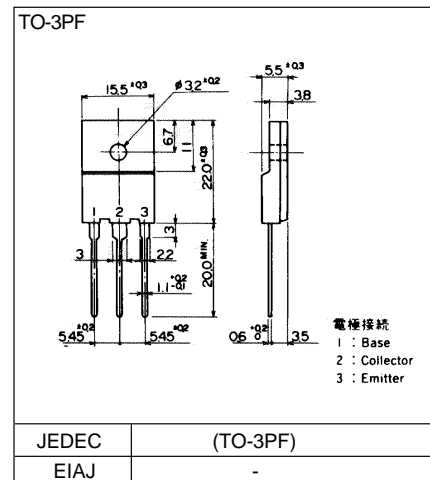


Characteristics

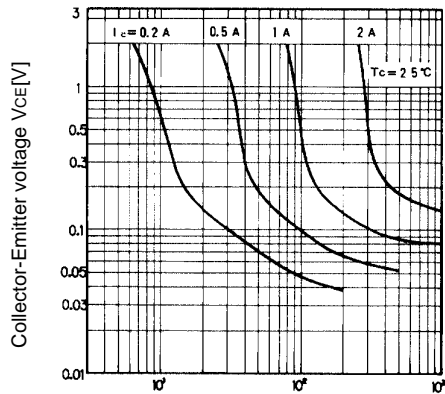


Collector Output Characteristics

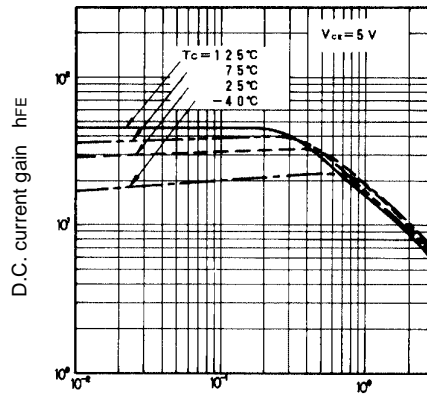


DC Current Gain

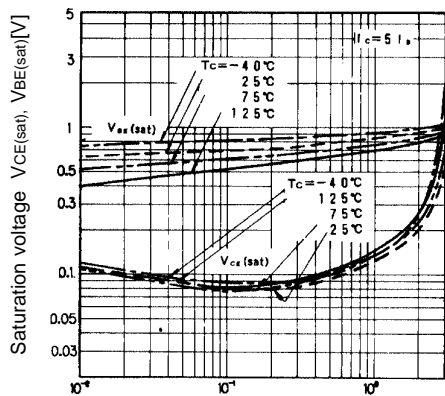


Base and Collector Saturation Voltage

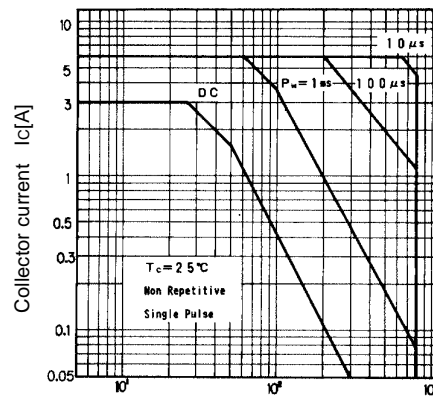

Safe Operating Area

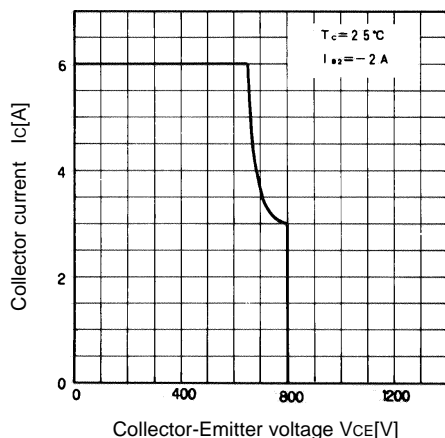


Reverse Biased Safe Operating Area

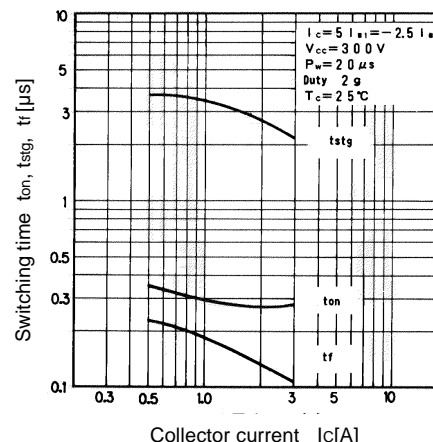


Switching Time

■ Characteristics

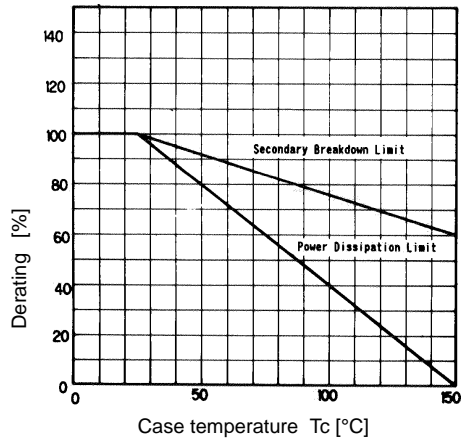

ASO Derating

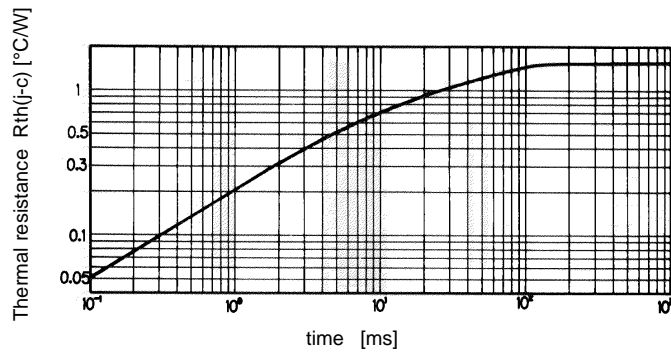

Transient Thermal Resistance