

**TRIPLE DIFFUSED PLANER TYPE  
HIGH VOLTAGE,HIGH SPEED SWITCHING**


**■ Features**

- High voltage,High speed switching
- Low saturation voltage
- High reliability

**■ Applications**

- Switching regulators
- DC-DC convertors
- Solid state relay
- General purpose power amplifiers

**■ Outline Drawings**

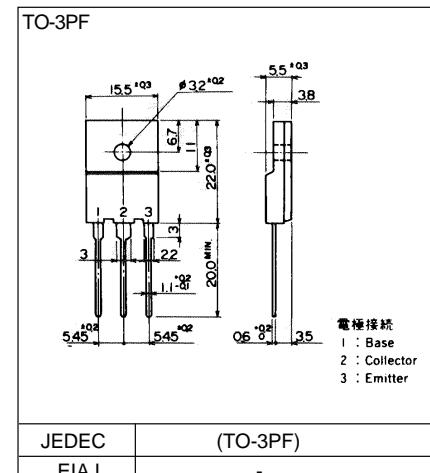

**■ Maximum ratings and characteristic**

**● Absolute maximum ratings (Tc=25°C unless otherwise specified)**

Item	Symbol	Rating	Unit
Collector-Base voltage	V <sub>CBO</sub>	500	V
Collector-Emitter voltage	V <sub>C EO</sub>	400	V
Collector-Emitter voltage	V <sub>C EO(SUS)</sub>	-	V
Emitter-Base voltage	V <sub>EBO</sub>	10	V
Collector current	I <sub>C</sub>	10	A
Base current	I <sub>B</sub>	3	A
Collector power dissipation	P <sub>C</sub>	80	W
Operating junction temperature	T <sub>j</sub>	+150	°C
Storage temperature	T <sub>stg</sub>	-55 to +150	°C


**● Electrical characteristics (Tc =25°C unless otherwise specified)**

Item	Symbol	Test Conditions	Min.	Typ.	Max.	Units
Collector-Base voltage	V <sub>CBO</sub>	I <sub>CBO</sub> = 1mA	500			V
Collector-Emitter voltage	V <sub>C EO</sub>					V
Collector-Emitter voltage	V <sub>C EO(SUS)</sub>	I <sub>C</sub> = 200mA	400			V
Emitter-Base voltage	V <sub>EBO</sub>	I <sub>EBO</sub> = 1mA	10			V
Collector-Base leakage current	I <sub>CBO</sub>	V <sub>CBO</sub> = 450V			0.1	mA
Emitter-Base leakage current	I <sub>EBO</sub>	V <sub>EBO</sub> = 10V			0.1	mA
D.C. current gain	h <sub>FE</sub>	I <sub>C</sub> = 1A, V <sub>CE</sub> = 5V	25	65		
Collector-Emitter saturation voltage	V <sub>C E(Sat)</sub>	I <sub>C</sub> = 4A, I <sub>B</sub> = 0.8A			0.8	V
Base-Emitter saturation voltage	V <sub>B E(Sat)</sub>				1.2	V
*1	t <sub>on</sub>	I <sub>C</sub> = 5A, I <sub>B1</sub> = 0.5A I <sub>B2</sub> = -1A, R <sub>L</sub> = 30Ω P <sub>w</sub> = 20μs Duty=<2%			1.0	μs
Switching time	t <sub>stg</sub>				2.5	μs
	t <sub>f</sub>				0.5	μs


**● Thermal characteristics**

Item	Symbol	Test Conditions	Min.	Typ.	Max.	Units
Thermal resistance	R <sub>th(j-c)</sub>	Junctionl to case			1.56	°C/W


## ■ Characteristics

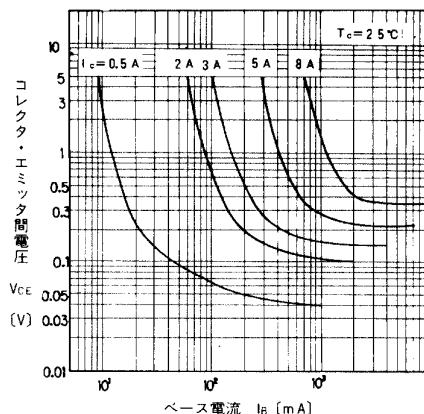


Collector Output Characteristics

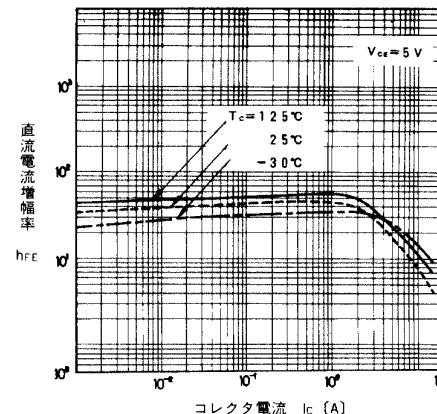


DC Current Gain

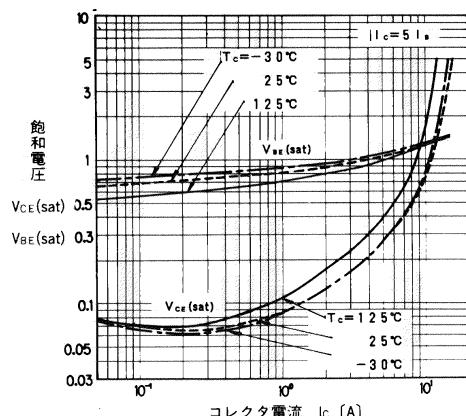


Base and Collector Saturation Voltage

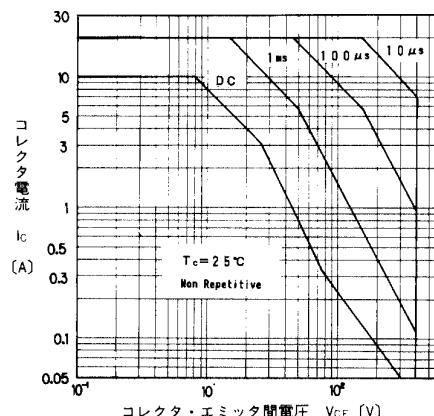


Safe Operating Area

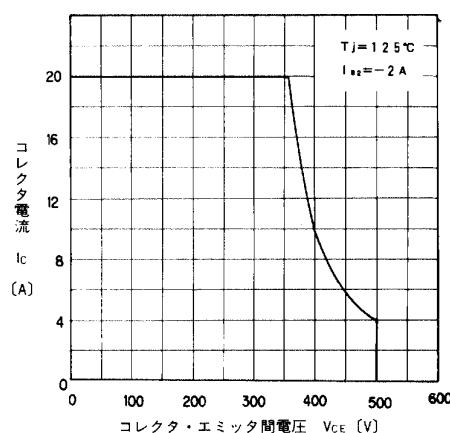


Reverse Biased Safe Operating Area

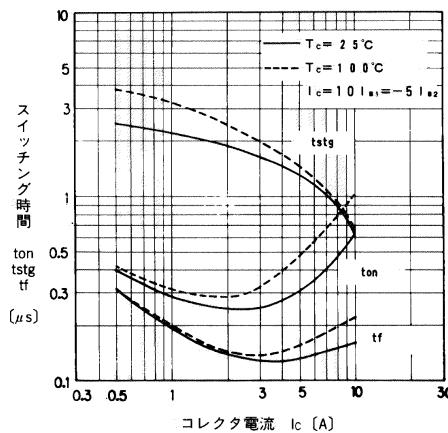

Switching Time

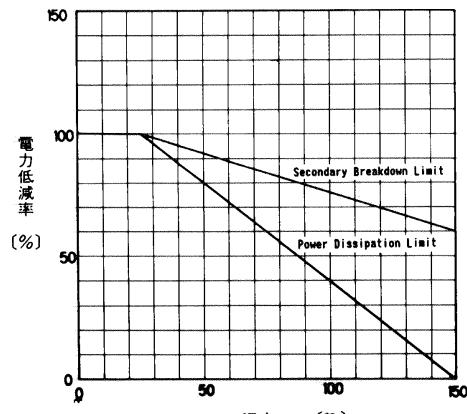

ASO Derating

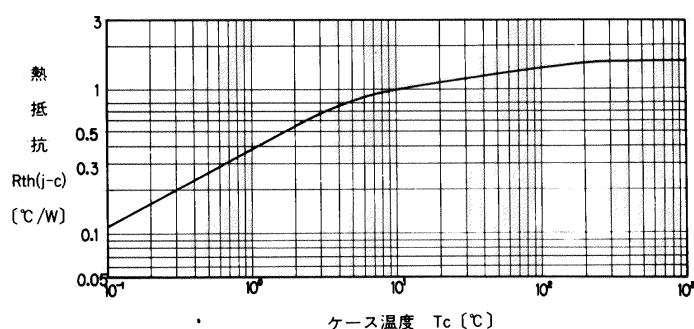

Transient Thermal Resistance