

TOSHIBA Field-Effect Transistor Silicon P-Channel MOS Type

SSM6J402TU


- DC/DC Converter Application
- High-Speed Switching Applications

- 4.0 V drive
- Low ON-resistance : $R_{DS(ON)} = 225m\Omega$ max (@ $V_{GS} = -4$ V)
: $R_{DS(ON)} = 117m\Omega$ max (@ $V_{GS} = -10$ V)

Absolute Maximum Ratings (Ta = 25°C)

Characteristic		Symbol	Rating	Unit
Drain-source voltage		V_{DSS}	-30	V
Gate-source voltage		V_{GSS}	±20	V
Drain current	DC	I_D	-2.0	A
	Pulse	I_{DP}	-4.0	
Drain power dissipation		P_D (注 1)	500	mW
Channel temperature		T_{ch}	150	°C
Storage temperature		T_{stg}	-55~150	°C

Note 1: Mounted on an FR4 board
(25.4 mm × 25.4 mm × 1.6 t, Cu Pad: 645 mm²)

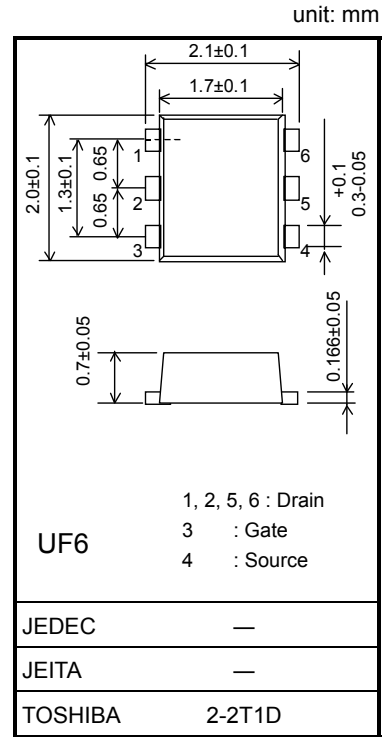

Weight: 7.0 mg (typ.)


Electrical Characteristics (Ta = 25°C)

Characteristic		Symbol	Test Condition	Min	Typ.	Max	Unit
Drain-source breakdown voltage		$V_{(BR)DSS}$	$I_D = -1$ mA, $V_{GS} = 0$ V	-30	—	—	V
		$V_{(BR)DSX}$	$I_D = -1$ mA, $V_{GS} = 20$ V	-15	—	—	
Drain cutoff current		I_{DSS}	$V_{DS} = -30$ V, $V_{GS} = 0$ V	—	—	-1	μA
Gate leakage current		I_{GSS}	$V_{GS} = \pm 16$ V, $V_{DS} = 0$ V	—	—	±1	μA
Gate threshold voltage		V_{th}	$V_{DS} = -5$ V, $I_D = -1$ mA	-1.2	—	-2.6	V
Forward transfer admittance		$ Y_{fs} $	$V_{DS} = -5$ V, $I_D = -1$ A (Note2)	1.6	3.1	—	S
Drain-source ON-resistance		$R_{DS(ON)}$	$I_D = -1$ A, $V_{GS} = -10$ V (Note2)	—	80	117	mΩ
			$I_D = -0.5$ A, $V_{GS} = -4$ V (Note2)	—	160	225	
Input capacitance		C_{iss}	$V_{DS} = -15$ V, $V_{GS} = 0$ V, $f = 1$ MHz	—	280	—	pF
Output capacitance		C_{oss}		—	80	—	
Reverse transfer capacitance		C_{rss}		—	45	—	
Total Gate Charge		Q_g	$V_{DS} = -15$ V, $I_D = -2.0$ A $V_{GS} = -10$ V	—	5.3	—	nC
Gate-Source Charge		Q_{gs}		—	4.1	—	
Gate-Drain Charge		Q_{gd}		—	1.2	—	
Switching time	Turn-on time	t_{on}	$V_{DD} = -15$ V, $I_D = -1$ A	—	16	—	ns
	Turn-off time	t_{off}	$V_{GS} = 0 \sim -4$ V, $R_G = 10$ Ω	—	35	—	
Drain-source forward voltage		V_{DSF}	$I_D = 2$ A, $V_{GS} = 0$ V (Note2)	—	0.8	1.2	V

Note 2: Pulse test


Switching Time Test Circuit

(a) Test Circuit

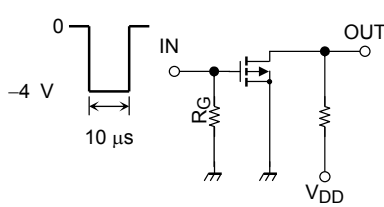


$V_{DD} = -15\text{ V}$
 $R_G = 10\ \Omega$
 $D.U. \leq 1\%$
 $V_{IN}: t_r, t_f < 5\text{ ns}$
 Common Source
 $T_a = 25^\circ\text{C}$

(b) V_{IN}

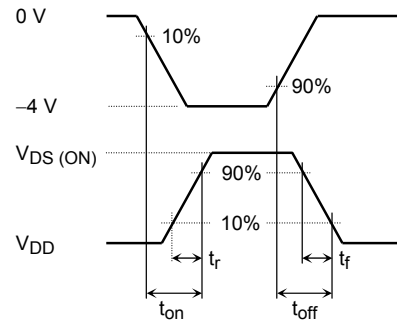


(c) V_{OUT}

Marking



Equivalent Circuit (top view)









Notice on Usage






V_{th} can be expressed as the voltage between gate and source when the low operating current value is $I_D = 1\text{ mA}$ for this product. For normal switching operation, $V_{GS (on)}$ requires a higher voltage than V_{th} and $V_{GS (off)}$ requires a lower voltage than V_{th} . (The relationship can be established as follows: $V_{GS (off)} < V_{th} < V_{GS (on)}$.)



Take this into consideration when using the device.

Handling Precaution

When handling individual devices that are not yet mounted on a circuit board, make sure that the environment is protected against electrostatic discharge. Operators should wear antistatic clothing, and containers and other objects that come into direct contact with devices should be made of antistatic materials.

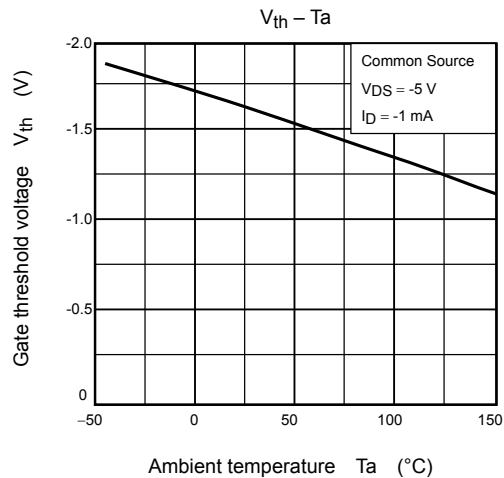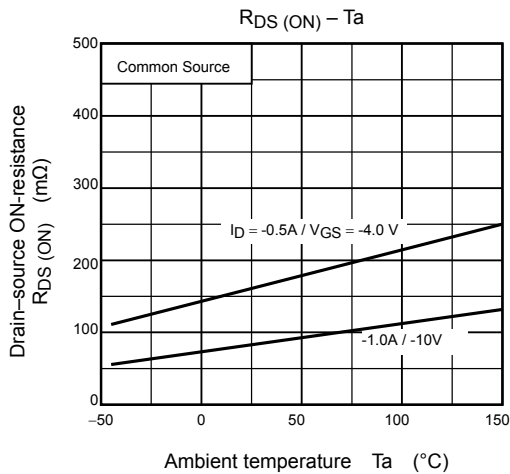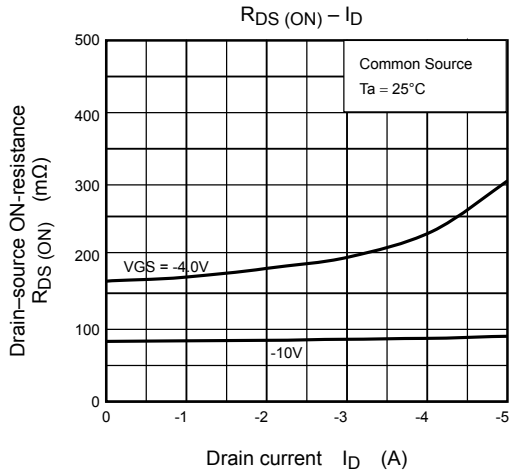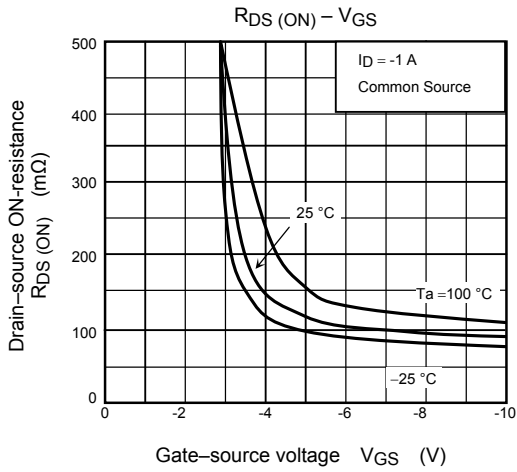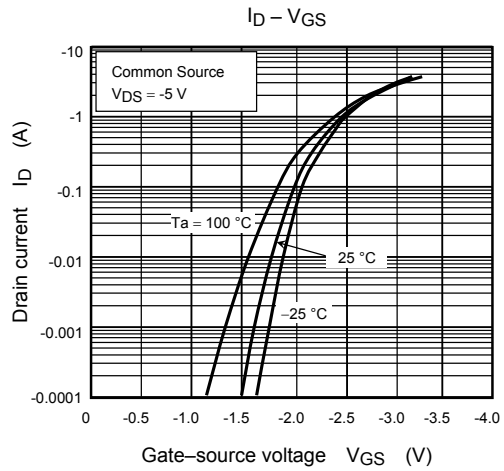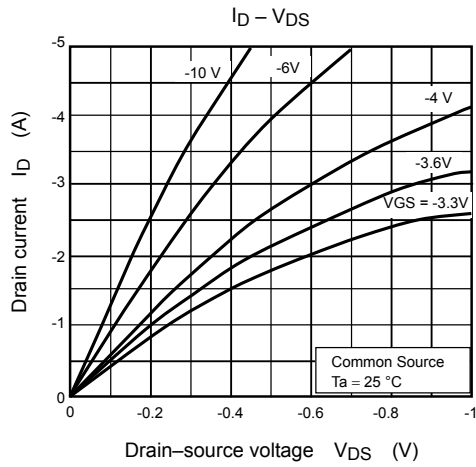

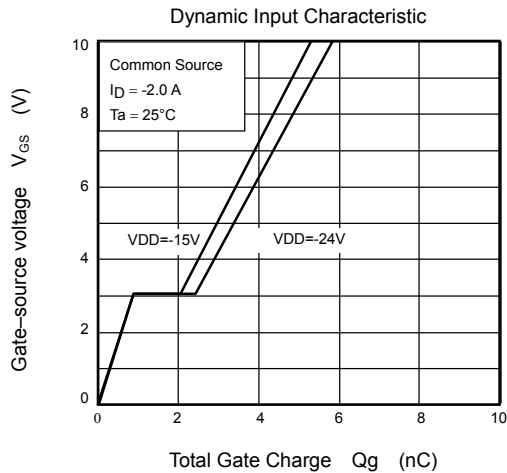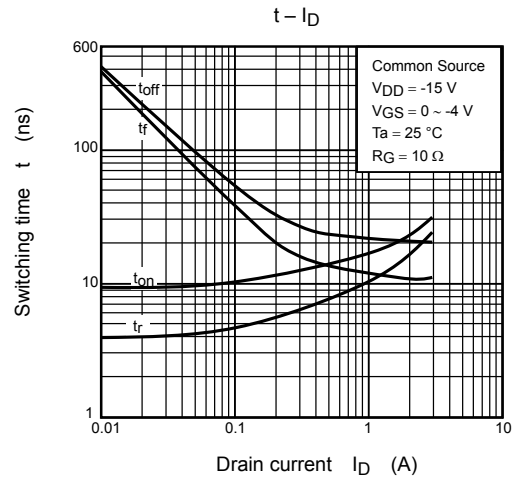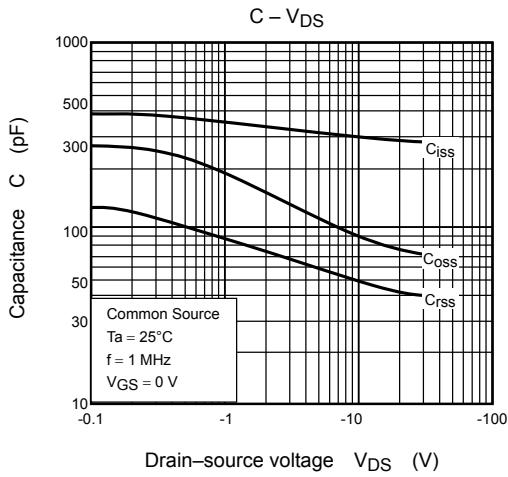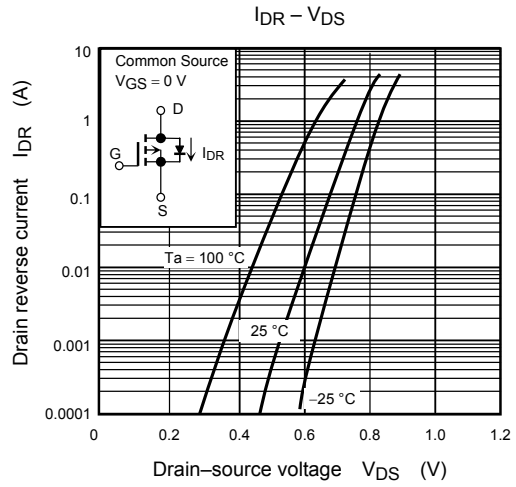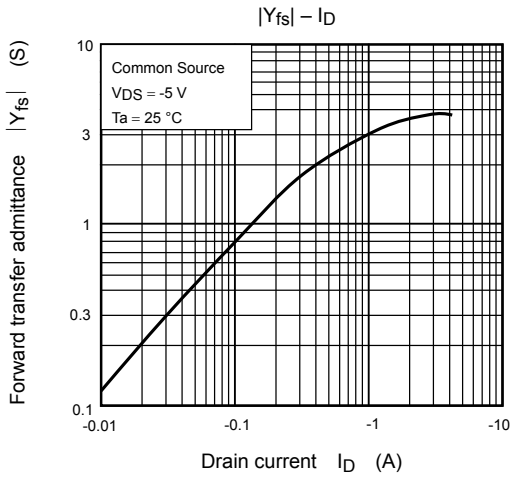

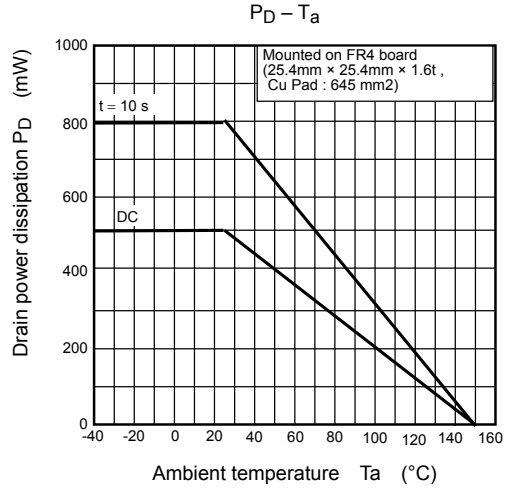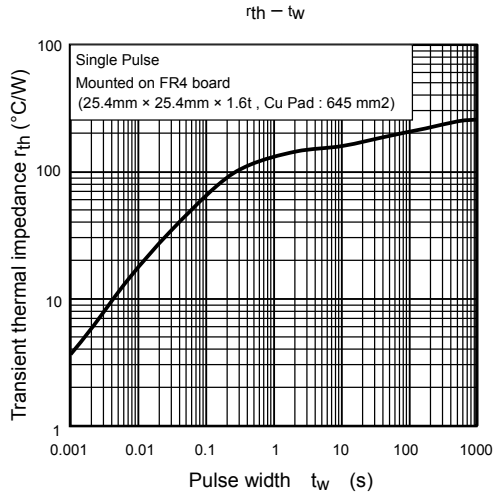

RESTRICTIONS ON PRODUCT USE

20070701-EN

- The information contained herein is subject to change without notice.
- TOSHIBA is continually working to improve the quality and reliability of its products. Nevertheless, semiconductor devices in general can malfunction or fail due to their inherent electrical sensitivity and vulnerability to physical stress. It is the responsibility of the buyer, when utilizing TOSHIBA products, to comply with the standards of safety in making a safe design for the entire system, and to avoid situations in which a malfunction or failure of such TOSHIBA products could cause loss of human life, bodily injury or damage to property.
In developing your designs, please ensure that TOSHIBA products are used within specified operating ranges as set forth in the most recent TOSHIBA products specifications. Also, please keep in mind the precautions and conditions set forth in the "Handling Guide for Semiconductor Devices," or "TOSHIBA Semiconductor Reliability Handbook" etc.
- The TOSHIBA products listed in this document are intended for usage in general electronics applications (computer, personal equipment, office equipment, measuring equipment, industrial robotics, domestic appliances, etc.). These TOSHIBA products are neither intended nor warranted for usage in equipment that requires extraordinarily high quality and/or reliability or a malfunction or failure of which may cause loss of human life or bodily injury ("Unintended Usage"). Unintended Usage include atomic energy control instruments, airplane or spaceship instruments, transportation instruments, traffic signal instruments, combustion control instruments, medical instruments, all types of safety devices, etc.. Unintended Usage of TOSHIBA products listed in this document shall be made at the customer's own risk.
- The products described in this document shall not be used or embedded to any downstream products of which manufacture, use and/or sale are prohibited under any applicable laws and regulations.
- The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by TOSHIBA for any infringements of patents or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any patents or other rights of TOSHIBA or the third parties.
- Product names mentioned herein may be trademarks of their respective companies.
- Please contact your sales representative for product-by-product details in this document regarding RoHS compatibility. Please use these products in this document in compliance with all applicable laws and regulations that regulate the inclusion or use of controlled substances. Toshiba assumes no liability for damage or losses occurring as a result of noncompliance with applicable laws and regulations.