

Silicon NPN Power Transistors

2SD1911

DESCRIPTION

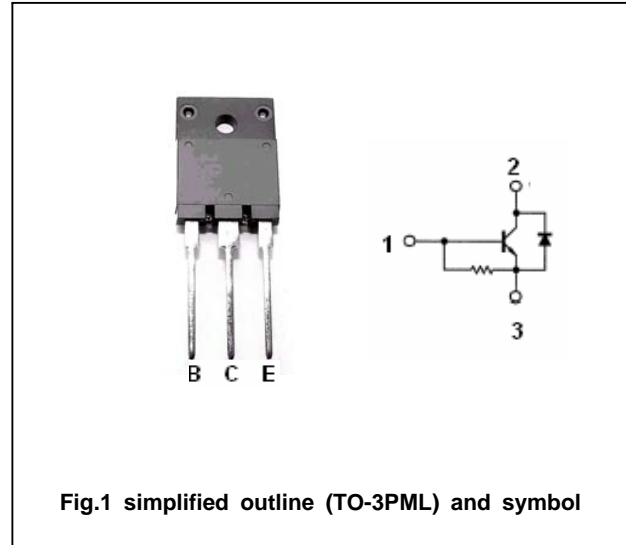
- With TO-3PML package
- High breakdown voltage
- High speed switching
- Built-in damper diode

APPLICATIONS

- For use in TV horizontal output applications

PINNING

PIN	DESCRIPTION
1	Base
2	Collector
3	Emitter

Absolute maximum ratings($T_a=25^\circ\text{C}$)

SYMBOL	PARAMETER	CONDITIONS	VALUE	UNIT
V_{CBO}	Collector-base voltage	Open emitter	1500	V
V_{CEO}	Collector-emitter voltage	Open base	600	V
V_{EBO}	Emitter-base voltage	Open collector	6	V
I_C	Collector current		5	A
I_{CM}	Collector current-peak		10	A
P_C	Collector power dissipation	$T_C=25^\circ\text{C}$	50	W
T_j	Junction temperature		150	$^\circ\text{C}$
T_{stg}	Storage temperature		-55~150	$^\circ\text{C}$

Silicon NPN Power Transistors

2SD1911

CHARACTERISTICS

T_j=25°C unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP.	MAX	UNIT
V _{CEO(SUS)}	Collector-emitter sustaining voltage	I _C =0.1A, I _B =0	600			V
V _{CE(sat)}	Collector-emitter saturation voltage	I _C =4.5A; I _B =1.2A			5.0	V
V _{BE(sat)}	Base-emitter saturation voltage	I _C =4.5A; I _B =1.2A			1.5	V
I _{CBO}	Collector cut-off current	V _{CB} =800V; I _E =0			10	μ A
I _{EBO}	Emitter cut-off current	V _{EB} =6V; I _C =0	50		200	mA
h _{FE}	DC current gain	I _C =1A; V _{CE} =5V	8		25	
V _F	Diode forward voltage	I _F =5A			2.0	V

Silicon NPN Power Transistors

2SD1911

PACKAGE OUTLINE

