


- Ultra-small-size, 6-element (LTM)
- Mini-resin-molded, 4-element (LTU)
- Ultra-small-size, 4-element (LTM_U)



OUTLINES & DIMENSIONS

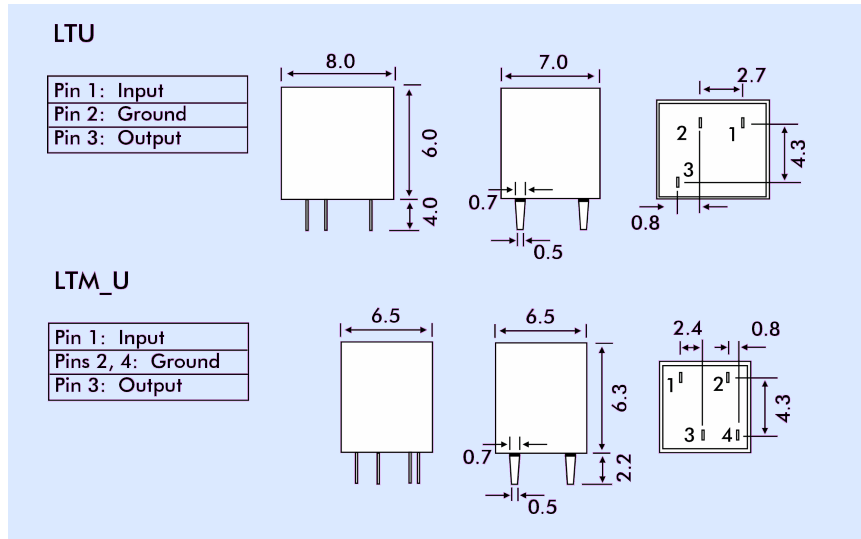

ELECTRICAL SPECIFICATION OF LTU / LTM_U / LTUM

Part Number	Insertion Loss	Pass Band Ripple	Bandwidth		Stop Band Att. ±100kHz	Input/Output Impedance
			6dB	50dB		
	dB max.	dB max.	kHz max.	kHz max.	dB max.	Ω
LTU455B / LTM455BU	4	2	±15.0	±30.0	27.0	1500
LTU455C / LTM455CU	4	2	±12.5	±24.0	27.0	1500
LTU455D / LTM455DU	4	2	±10.0	±20.0	27.0	1500
LTU455E / LTM455EU	6	2	±7.5	±15.0	27.0	1500
LTU455F / LTM455FU	6	2	±6.0	±12.5	27.0	2000
LTU455G / LTM455GU	6	2	±4.5	±10.0	25.0	2000
LTU455H / LTM455HU	6	2	±3.0	±9.0	25.0	2000
LTU455I / LTM455IU	6	2	±2.0	±7.5	25.0	2000
LTU455HT / LTM455HT	6	2	±3.0	±9.0	35.0	2000
LTU455IT / LTM455IT	6	2	±2.0	±7.5	35.0	2000

Other frequencies and specifications are available upon request
Centre frequency 450kHz is also available.