

## MICRO-0.3-I

### GENERAL SPECIFICATIONS OUTDOOR MODELS

#### MICRO-0.3-I-OUTD

AURORA UNO

The new Aurora 300 Watt micro-inverter product offers something new to Power-One customers. The ability to individually link all modules within a specific installation is an alternative to the traditional Aurora string inverters Power-One is famous for.


Micro-inverters have some advantages over string inverters. They allow you to control the panels output individually and offer Maximum Power Point Tracking (MPPT) for each single module.

They also allow you to control individual panels in different ways and reduce the losses in efficiency in a variety of challenging conditions.



## Features

- 'Electrolyte-free' power converter to further increase the life expectancy and long term reliability
- Outdoor enclosure for unrestricted use under any environmental conditions
- Increased energy harvesting thanks to the MPPT algorithm which works at the level of each solar panel in any light condition
- No DC input current ripple
- The HF isolation allows it to fit any application that requires the grounding of either one of the input terminations
- 95.5% of efficiency
- Ease of installation by the implementation of a package inclusive of proprietary wireless communication hub and grid interface
- Reduced susceptibility to fault. In case of a component failure only the energy produced from one PV module will be lost
- Up to 10 micro inverters directly connectable in a string

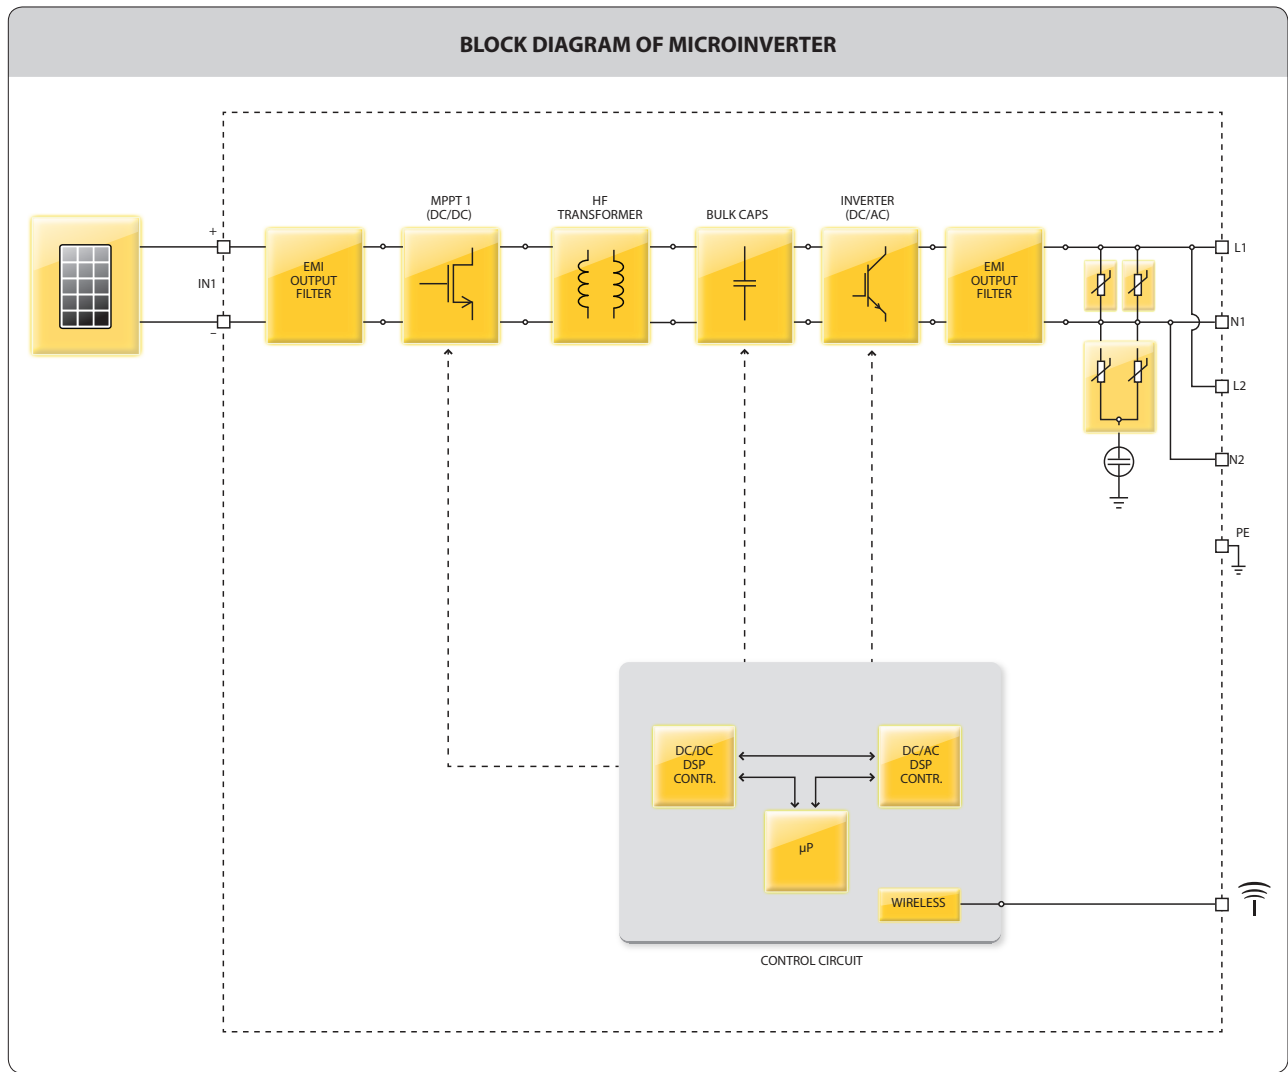

## Block Diagram

PARAMETER	MICRO-0.3-I
<b>Input Side</b>	
Maximum Input Power ( $P_{dcmax,STC}$ )	320 Wp
Operating Input Range ( $V_{dcmin} \dots V_{dcmax}$ )	25...60 V
MPPT Input range ( $V_{MPPTmin,r} \dots V_{MPPTmax,r}$ )	30...50 V
Absolute Maximum Input Voltage ( $V_{max,abs}$ )	65 V
Absolute Maximum Input Current ( $I_{dcmax,abs}$ )	10.0 A
Number of DC Inputs Pairs	1
DC Connection Type	MC4
<b>Output Side</b>	
AC Grid Connection ( $V_{acmin} \dots V_{acmax}$ )	Single phase
Rated Power ( $P_{ac,r}$ )	300 W
Rated Grid Voltage ( $V_{ac,r}$ )	230 / 240 Vac
AC Voltage Range ( $V_{acmin} \dots V_{acmax}$ )	180...264 Vac <sup>1</sup>
Maximum Output Current ( $I_{ac,max}$ )	1.5 A
Rated Frequency ( $f_r$ )	50/60 Hz
Frequency Range ( $f_{min} \dots f_{max}$ )	47...53 / 57...63 Hz <sup>2</sup>
Nominal Power Factor ( $\cos\phi_{ac,r}$ )	> 0.95
Maximum number of units per string	10
<b>Output Protection</b>	
Anti-islanding protection	According to local standard
Output Over Voltage Protection - Varistor	2(L - N) / 2 (L - PE)
<b>Operating Performance</b>	
Maximum Efficiency ( $\eta_{max}$ )	95.5%
Weighted Efficiency (EURO/CEC)	95.0% / 95.0%
Stand-by Consumption	< 0.05 W
<b>Communication</b>	
Local Monitoring System	Wireless
Remote Control	Wireless
<b>Environmental</b>	
Ambient Temperature Range	-40...+70°C / -40...158°F
Relative Humidity	0...100 % condensing
Noise Emission	< 30 db(A) @ 1 m
Maximum Operating Altitude without Derating	2000 m / 6560 ft
<b>Physical</b>	
Environmental Protection Rating	IP 65
Cooling	Natural
Dimension (H x W x D)	210mm x 160mm x 50mm / 8.3" x 6.3" x 2.0"
Weight	< 1.5 kg / 3.3 lb
<b>Safety</b>	
Isolation Level	HF Transformer
Marking	CE, cCSAus
Safety and EMC Standard	EN 50178, EN61000-6-2, EN61000-6-4, EN61000-3-11, EN61000-3-12
Grid Standard	VDE0126-1-1, Enel Guideline, AS4777, G83/1, UL1741, IEEE 1547, FCC
<b>Available Products Variants</b>	
Standard	MICRO-0.3-I-OUTD

<sup>1</sup> The AC Voltage Range may vary depending on specific country grid standard

<sup>2</sup> The Frequency Range may vary depending on specific country grid standard

# www.power-one.com

## Power-One Renewable Energy Worldwide Sales Offices

<b>Country</b>	<b>Name/Region</b>	<b>Telephone</b>	<b>Email</b>
<b>Australia</b>	Asia Pacific	+61 2 9735 3111	sales.australia@power-one.com
<b>China</b>	Asia Pacific	+86 755 2988 5888 ext.5588	sales.china@power-one.com
<b>Singapore</b>	Asia Pacific	+65 6896 3363	sales.singapore@power-one.com
<b>France</b>	Europe	00 800 00287672 Choix n°4	sales.france@power-one.com
<b>Germany</b>	Europe	+49 7641 955 2020	sales.germany@power-one.com
<b>Italy</b>	Europe	+39 055 9195 396	sales.italy@power-one.com
<b>Spain</b>	Europe	+34 629253564	sales.spain@power-one.com
<b>United Kingdom</b>	Europe	+44 1903 823 323	sales.UK@power-one.com
<b>Dubai</b>	Middle East	+971 50 100 4142	sales.dubai@power-one.com
<b>Canada</b>	North America	+1 877 261-1374	sales.canada@power-one.com
<b>USA East</b>	North America	+1 877 261-1374	sales.usaeast@power-one.com
<b>USA Central</b>	North America	+1 877 261-1374	sales.usacentral@power-one.com
<b>USA West</b>	North America	+1 877 261-1374	sales.usawest@power-one.com