
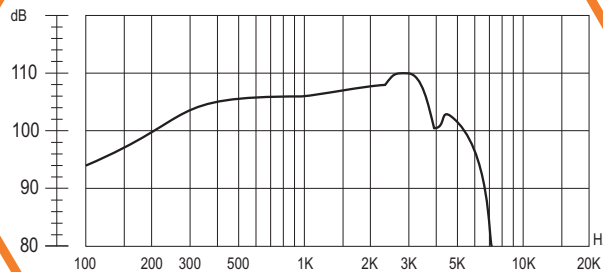
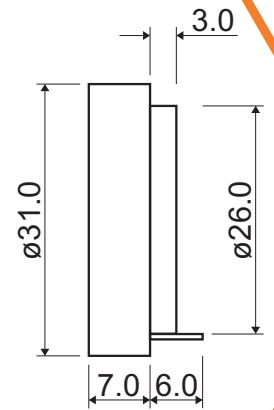


SoniCrest
SPEAKER SOUND GENERATORS

HSR31A



Dimension

Unit : mm
 Tolerance : $\pm 0.3\text{mm}$

Frequency Response

Applied Voltage : 1mW, Sine Wave
 Based on IEC-R318 Standard

● **Specification** (all data taken at 25°C unless otherwise specified)

Coil Impedance (Ω)	Rated Power (mW)	Maximum Input Power (mW)	★Sensitivity at 1kHz (dB)	★Frequency Range (Hz)	Total Harmonic Distortion (THD)	Operating Temperature (°C)	Storage Temperature (°C)
150 \pm 20%	10	20	106 \pm 3	300 ~ 3400	< 5%	-20 ~ +55	-20 ~ +55

HSR31A-150

The specification are only for 150 Ω version. Specification for other impedance is available upon request.
 ★Value Applied 1mW Input Power and Based on IEC-R318 Standard.

www.jlworld.com