
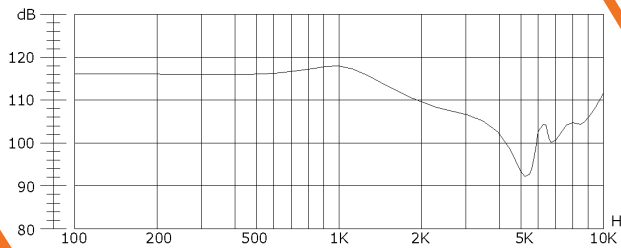




# SoniCrest SPEAKER SOUND GENERATORS

## HSR40D



### Dimensions

Unit : mm

Tolerance : ±0.3mm

### Frequency Response

Applied Voltage: 179mV, Sine Wave  
Based on IEC-R318 Standard

### Specification (all data taken at 25°C unless otherwise specified)

Coil Impedance (Ω)	Rated Power (mW)	Maximum Input Power (mW)	*Sensitivity at 1KHz (dB)	*Frequency Range (Hz)	Total Harmonic Distortion (Hz)	Operating Temperature (°C)	Storage Temperature (°C)
32 ± 15%	10	20	118 ± 3	150 ~ 3000	<10%	-20 ~ +50	-20 ~ +50

HSR40D-32

The specification are only for 32Ω version. Specification for other impedance is available upon request.  
\*Value applied: 179mV input voltage, based on IEC-R318 standard.

[www.jlworld.com](http://www.jlworld.com)