

# SI-3000KD Series Surface-Mount, Low Current Consumption, Low Dropout Voltage Linear Regulator ICs

## ■ Features

- Compact surface-mount package (TO263-5)
- Output current: 1.0A
- Low dropout voltage:  $V_{DIF} \leq 0.6V$  (at  $I_o = 1.0A$ )
- Low circuit current consumption:  $I_q \leq 350 \mu A$  (600  $\mu A$  for SI-3010KD, SI-3050KD)
- Low circuit current at output OFF:  $I_q (OFF) \leq 1 \mu A$
- Built-in overcurrent, thermal protection circuits
- Compatible with low ESR capacitors (SI-3012KD and SI-3033KD)

## ■ Absolute Maximum Ratings

( $T_a=25^\circ C$ )

Parameter	Symbol	Ratings		Unit
		SI-3012KD/3033KD	SI-3010KD/3050KD	
DC Input Voltage	$V_{IN}$	17	35 <sup>*1</sup>	V
DC Output Current	$I_o$	1.0		A
Power Dissipation	$P_D$ <sup>*2</sup>	3		W
Junction Temperature	$T_j$	-30 to +125		$^\circ C$
Storage Temperature	$T_{stg}$	-30 to +125		$^\circ C$
Thermal Resistance (Junction to Ambient Air)	$\theta_{j-a}$	33.3		$^\circ C/W$
Thermal Resistance (Junction to Case)	$\theta_{j-c}$	3		$^\circ C/W$

\*1: A built-in input-overvoltage-protection circuit shuts down the output voltage at the Input Overvoltage Shutdown Voltage of the electrical characteristics.

\*2: When mounted on glass-epoxy board of 1600mm<sup>2</sup> (copper laminate area 100%).

## ■ Applications

- Secondary stabilized power supply (local power supply)

## ■ Electrical Characteristics 1 (Low $V_o$ type compatible with low ESR output capacitor)

( $T_a=25^\circ C$ ,  $V_c=2V$  unless otherwise specified)

Parameter	Symbol	Ratings						Unit	
		SI-3012KD (Variable type)			SI-3033KD				
		min.	typ.	max.	min.	typ.	max.		
Input Voltage	$V_{IN}$	2.4 <sup>*3</sup>		*4	*3		*4	V	
Output Voltage (Reference Voltage for SI-3012KD)	$V_o (V_{ADJ})$	1.24	1.28	1.32	3.234	3.300	3.366	V	
	Conditions	$V_{IN}=3.3V, I_o=10mA$			$V_{IN}=5V, I_o=10mA$				
Line Regulation	$\Delta V_{OLINE}$			15			15	mV	
	Conditions	$V_{IN}=3.3$ to 8V, $I_o=10mA$ ( $V_o=2.5V$ )			$V_{IN}=5$ to 10V, $I_o=10mA$				
Load Regulation	$\Delta V_{OLOAD}$			40			50	mV	
	Conditions	$V_{IN}=3.3V, I_o=0$ to 1A ( $V_o=2.5V$ )			$V_{IN}=5V, I_o=0$ to 1A				
Dropout Voltage	$V_{DIF}$			0.4			0.4	V	
	Conditions	$I_o=0.5A$ ( $V_o=2.5V$ )			$I_o=0.5A$				
	Conditions	$I_o=1A$ ( $V_o=2.5V$ )			$I_o=1A$				
Quiescent Circuit Current	$I_q$			350			350	$\mu A$	
	Conditions	$V_{IN}=3.3V, I_o=0A, V_c=2V, R_2=2.4k\Omega$			$V_{IN}=5V, I_o=0A, V_c=2V$				
Circuit Current at Output OFF	$I_q (OFF)$			1			1	$\mu A$	
	Conditions	$V_{IN}=3.3V, V_c=0V$			$V_{IN}=5V, V_c=0V$				
Temperature Coefficient of Output Voltage	$\Delta V_o/\Delta T_a$		$\pm 0.3$			$\pm 0.3$		mV/ $^\circ C$	
	Conditions	$T_j=0$ to $100^\circ C$ ( $V_o=2.5V$ )			$T_j=0$ to $100^\circ C$				
Ripple Rejection	RREJ		55			55		dB	
	Conditions	$V_{IN}=3.3V, f=100$ to 120Hz, $I_o=0.1A$ ( $V_o=2.5V$ )			$V_{IN}=5V, f=100$ to 120Hz, $I_o=0.1A$				
Overcurrent Protection Starting Current <sup>*1</sup>	$I_{S1}$	1.1			1.1			A	
	Conditions	$V_{IN}=3.3V$			$V_{IN}=5V$				
Vc Terminal	Control Voltage (Output ON) <sup>*2</sup>	$V_c, IH$	2		2			V	
	Control Voltage (Output OFF)	$V_c, IL$					0.8		
	Control Current (Output ON)	$I_c, IH$			0.8			40	
		Conditions	$V_c=2V$			$V_c=2V$			$\mu A$
	Control Current (Output OFF)	$I_c, IL$	-5	0		-5	0		$\mu A$
	Conditions	$V_c=0V$			$V_c=0V$				

\*1:  $I_{S1}$  is specified at the 5% drop point of output voltage  $V_o$  under the condition of Output Voltage parameter.

\*2: Output is OFF when the output control terminal ( $V_c$  terminal) is open. Each input level is equivalent to LS-TTL level. Therefore, the device can be driven directly by LS-TTLs.

\*3: Refer to the Dropout Voltage parameter.

\*4:  $V_{IN} (max)$  and  $I_o (max)$  are restricted by the relation  $P_D = (V_{IN} - V_o) \times I_o$ . Please calculate these values referring to the Copper laminate area vs. Power dissipation data.

## Electrical Characteristics 2 (High Vo Type)

Parameter	Symbol	Ratings						Unit
		SI-3010KD (Variable type)			SI-3050KD			
		min.	typ.	max.	min.	typ.	max.	
Input Voltage	$V_{IN}$	2.4 <sup>*1</sup>		27 <sup>*5</sup>	<sup>*1</sup>		15 <sup>*5</sup>	V
Output Voltage (Reference Voltage $V_{ADJ}$ for SI-3010KD)	$V_O$ ( $V_{ADJ}$ )	0.98	1.00	1.02	4.90	5.00	5.10	V
Line Regulation	Conditions	$V_{IN}=7V, I_O=10mA$			$V_{IN}=7V, I_O=10mA$			
	$\Delta V_{OLINE}$			30			30	mV
Load Regulation	Conditions	$V_{IN}=6$ to 11V, $I_O=10mA$ ( $V_O=5V$ )			$V_{IN}=6$ to 11V, $I_O=10mA$			
	$\Delta V_{OLOAD}$			75			75	mV
Dropout Voltage	$V_{DIF}$			0.3			0.3	V
	Conditions	$I_O=0.5A$ ( $V_O=5V$ )			$I_O=0.5A$			
	Conditions	$I_O=1A$ ( $V_O=5V$ )			$I_O=1A$			
Quiescent Circuit Current	$I_q$			600			600	$\mu A$
	Conditions	$V_{IN}=7V, I_O=0A, V_C=2V$ $R_2=10k\Omega$			$V_{IN}=7V, I_O=0A,$ $V_C=2V$			
Circuit Current at Output OFF	$I_q$ (OFF)			1			1	$\mu A$
	Conditions	$V_{IN}=7V, V_C=0V$			$V_{IN}=7V, V_C=0V$			
Temperature Coefficient of Output Voltage	$\Delta V_O/\Delta T_a$		$\pm 0.5$			$\pm 0.5$		mV/ $^{\circ}C$
	Conditions	$T_J=0$ to 100 $^{\circ}C$ ( $V_O=5V$ )			$T_J=0$ to 100 $^{\circ}C$			
Ripple Rejection	$R_{REJ}$		75			75		dB
	Conditions	$V_{IN}=7V,$ $f=100$ to 120Hz, $I_O=0.1A$ ( $V_O=5V$ )			$V_{IN}=7V,$ $f=100$ to 120Hz, $I_O=0.1A$			
Overcurrent Protection Starting Current <sup>*2</sup>	$I_{S1}$		1.1		1.1			A
	Conditions	$V_{IN}=7V$			$V_{IN}=7V$			
Vc Terminal	Control Voltage (Output ON) <sup>*3</sup>	$V_C, I_H$	2.0		2.0			V
	Control Voltage (Output OFF) <sup>*3</sup>	$V_C, I_L$			0.8		0.8	
	Control Current (Output ON)	$I_C, I_H$			40		40	$\mu A$
	Control Current (Output OFF)	$I_C, I_L$	-5	0		-5	0	
	Conditions	$V_C=2V$			$V_C=2V$			
Conditions	$V_C=0V$			$V_C=0V$				
Input Overvoltage Shutdown Voltage	$V_{OVP}$		33		26			V
	Conditions	$I_O=10mA$			$I_O=10mA$			

\*1: Refer to the Dropout Voltage parameter.

\*2:  $I_{S1}$  is specified at the 5% drop point of output voltage  $V_O$  under the condition of Output Voltage parameter.

\*3: Output is OFF when the output control terminal (Vc terminal) is open. Each input level is equivalent to LS-TTL level. Therefore, the device can be driven directly by LS-TTLs.


\*4: SI-3010KD, SI-3050KD, cannot be used in the following applications because the built-in foldback-type overcurrent protection may cause errors during start-up stage.

(1) Constant current load (2) Positive and negative power supply (3) Series-connected power supply (4)  $V_O$  adjustment by raising ground voltage


\*5:  $V_{IN}$  (max) and  $I_O$  (max) are restricted by the relation  $P_D = (V_{IN} - V_O) \times I_O$ . Please calculate these values referring to the Copper laminate area vs. Power dissipation data as shown hereinafter.

## External Dimensions (TO263-5)


(unit : mm)

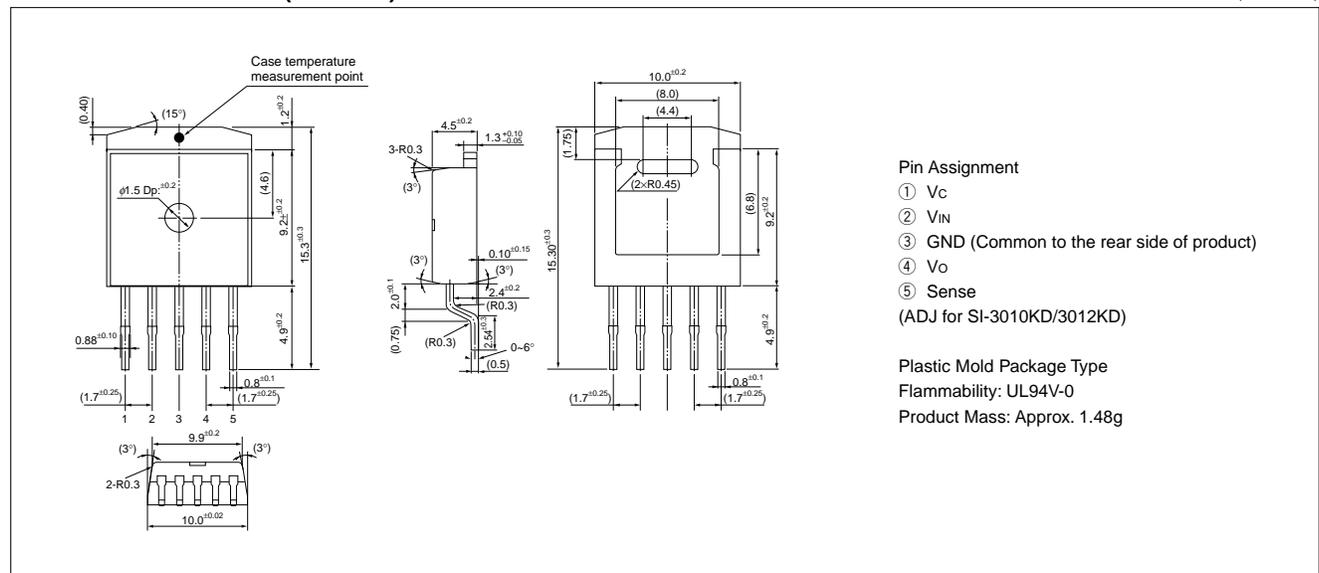

■Block Diagram

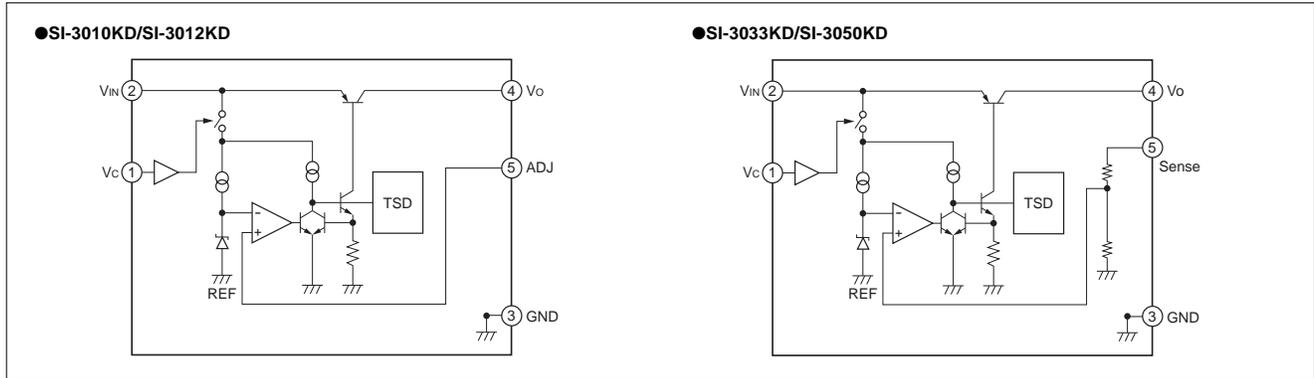


■Typical Connection Diagram

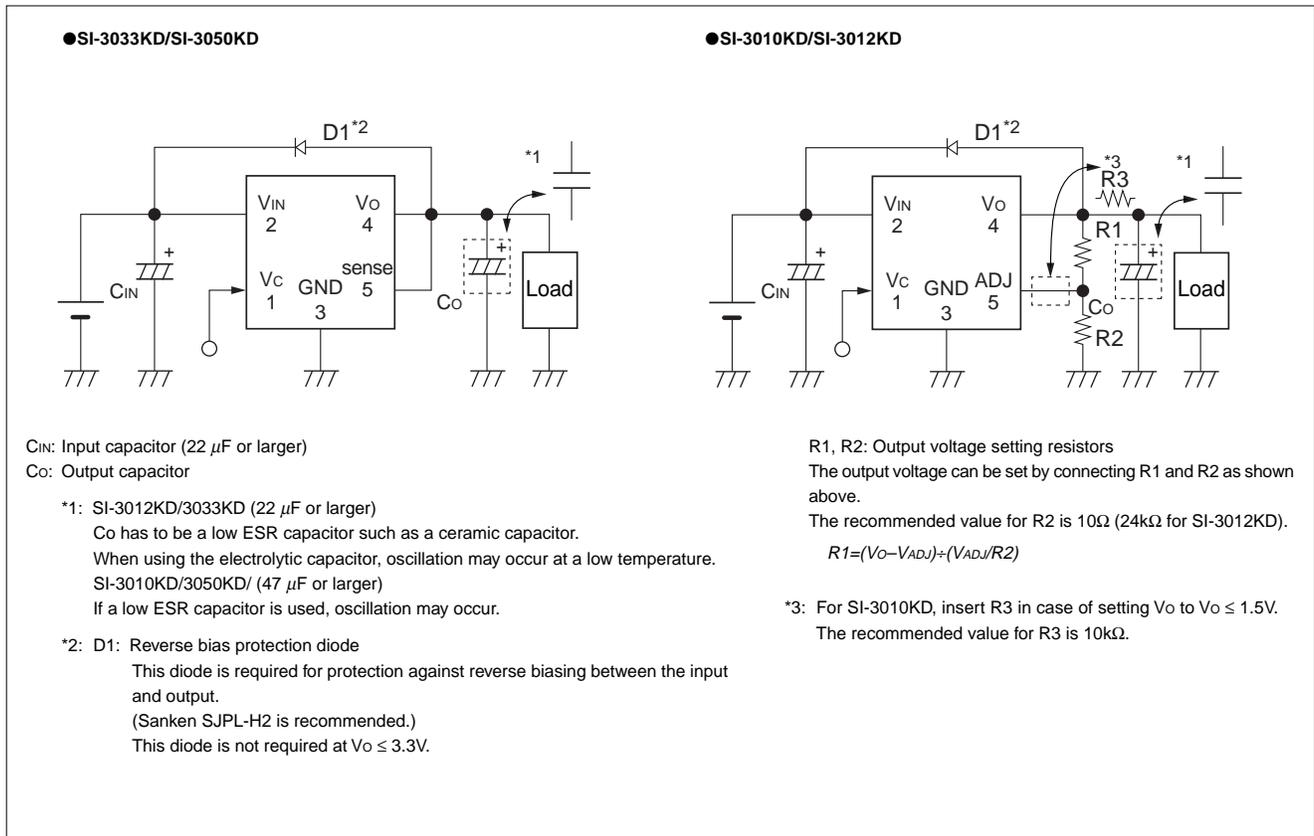

■Reference Data

Copper Laminate Area (on Glass-Epoxy Board) vs. Thermal Resistance (from Junction to Ambient Temperature) (Typical Value)

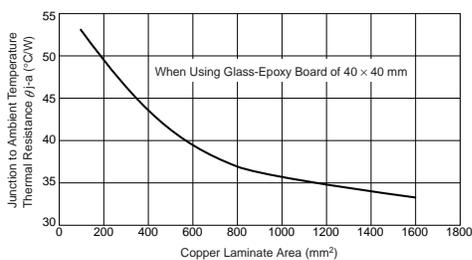

- A higher heat radiation effect can be achieved by enlarging the copper laminate area connected to the inner frame to which a monolithic ICs is mounted.
- Obtaining the junction temperature  
 Measure the case temperature  $T_c$  with a thermocouple, etc. Then, substitute this value in the following formula to obtain the junction temperature.

$$T_j = P_D \times \theta_{j-c} + T_c \quad (\theta_{j-c} = 3^\circ C/W) \quad P_D = (V_{IN} - V_o) \cdot I_{OUT}$$