



ON Semiconductor®

ON Semiconductor
DATA SHEET**LB1973M** — **Bi-CMOS LSI**
Two-channel H-Bridge Driver**Overview**

The LB1973M is a two-channel H-bridge driver that supports for low saturation drive operation. It is optimal for H-bridge drive of stepping motors (AF and zoom) in portable equipment such as camera cell phones.

Features

- Two-channel H-bridge driver
- The range of the operation voltage is wide.(1.8V to 7.5V)
- Small package : MFP10S(225mil)
- Built-in thermal protection

Specifications**Absolute Maximum Ratings** at $T_a = 25^\circ\text{C}$

Parameter	Symbol	Conditions	Ratings	Unit
Maximum supply voltage	$V_{CC \text{ max}}$		-0.3 to +8.0	V
Output voltage	$V_{OUT \text{ max}}$		-0.3 to $V_{CC}+V_{SF}$	V
Input voltage	$V_{IN \text{ max}}$	CONT, IN	-0.3 to +8.0	V
Ground pin source current	I_{GND}	Per channel	1000	mA
Allowable power dissipation	$P_d \text{ max1}$	For Unit	350	mW
	$P_d \text{ max2}$	Mounted on a circuit board.*	870	mW
Operating temperature	T_{opr}		-20 to +85	°C
Storage temperature	T_{stg}		-40 to +150	°C

* Mounted on a Specified board : 114.3mm×76.1mm×1.6mm, glass epoxy

Allowable Operating Ratings at $T_a = 25^\circ\text{C}$

Parameter	Symbol	Conditions	Ratings	Unit
Supply voltage	V_{CC}		1.8 to 7.5	V
High-level input voltage	V_{IH}		1.3 to 7.5	V
Low-level input voltage	V_{IL}		-0.3 to +0.5	V

LB1973M



Electrical Characteristics at Ta = 25°C, VCC = 1.9V

Parameter	Symbol	Conditions	Ratings			Unit
			min	typ	max	
Source current	I _{CCO1}	V _{CC} = 1.9V, IN1 to IN4 = 0V		0.01	1	μA
	I _{CCO2}	V _{CC} = 3V, IN1 to IN4 = 0V		0.01	1	μA
	I _{CC1}	IN1 = 1.9V, IN2 to IN4 = 0V		18	25	mA
	I _{CC2}	IN1 = 3V, IN2 to IN4 = 0V, V _{CC} = 3V		19	26	mA
Output saturation voltage1 (single connection)	V _{OUT11}	I _{OUT} = 270mA, V _{CC} = 1.9V to 3.6V, V _{OUT} = Upper Tr and Under Tr IN1 = 1.3V, IN2 to IN4 = 0V Supplementation: Standard similar as for IN2 to IN4 = 1.3V		0.2	0.3	V
	V _{OUT12}	I _{OUT} = 350mA, V _{CC} = 1.9V to 3.6V, V _{OUT} = Upper Tr and Under Tr IN1 = 1.3V, IN2 to IN4 = 0V Supplementation: Standard similar as for IN2 to IN4 = 1.3V		0.25	0.4	V
Output saturation voltage2 (parallel connection)	V _{OUT21}	I _{OUT} = 270mA, V _{CC} = 1.9V to 3.6V, V _{OUT} = Upper Tr and Under Tr OUT1-3, OUT2-4 short. IN1 and IN3 = 1.3V, IN2 and IN4 = 0V Supplementation: Standard similar as for IN2 and IN4 = 1.3V		0.12	0.2	V
	V _{OUT22}	I _{OUT} = 500mA, V _{CC} = 1.9V to 3.6V, V _{OUT} = Upper Tr and Under Tr OUT1-3, OUT2-4 short. IN1 and IN3 = 1.3V, IN2 and IN4 = 0V Supplementation: Standard similar as for IN2 and IN4 = 1.3V		0.2	0.35	V
Input current	I _{IN}	V _{IN} = 1.9V		32	70	μA
Thermal shutdown operation temperature	T _{tsd}			140		°C
Temperature hysteresis width	ΔT			20		°C
Spark killer Diode						
Reverse current	I _{S(Leak)}	V _{CC-OUT} = 8V, V _{IN} = 0V			10	μA
Forward voltage	V _{SF}	I _{OUT} = 400mA, V _{IN} = 0V			1.7	V


Package Dimensions

unit : mm (typ)

3086B

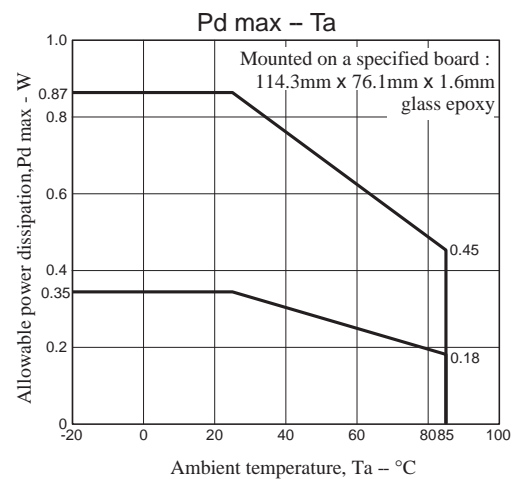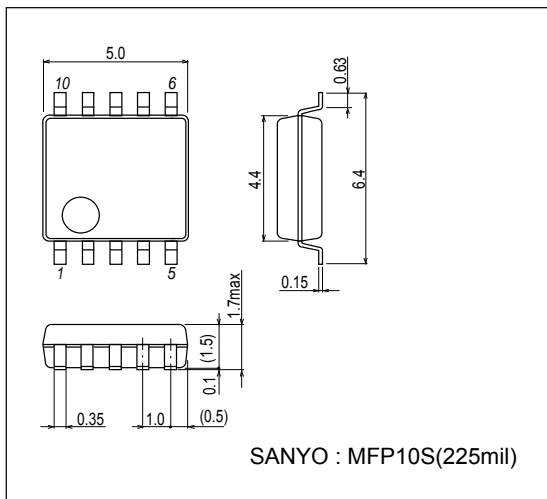


Pin Assignment

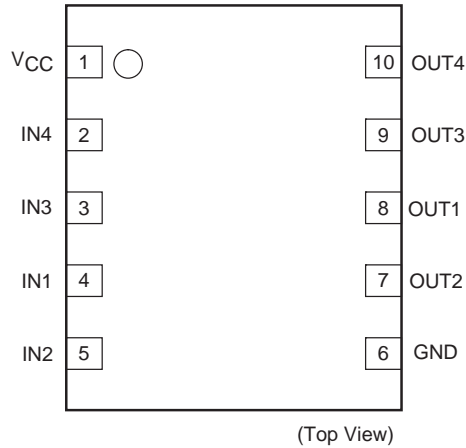

Truth Table


Input				Output				Mode
IN1	IN2	IN3	IN4	OUT1	OUT2	OUT3	OUT4	
Low	Low	Low	Low	Off	Off	Off	Off	Standby mode
High	Low	-	-	High	Low	-	-	Channel 1, forward
Low	High			Low	High			Channel 1, reverse
-	-	High	Low	-	-	High	Low	Channel 2, forward
		Low	High			Low	High	Channel 2, reverse
High	High	-	-	The logic output for the first high-level input is produced.				
-	-	High	High					

Block Diagram

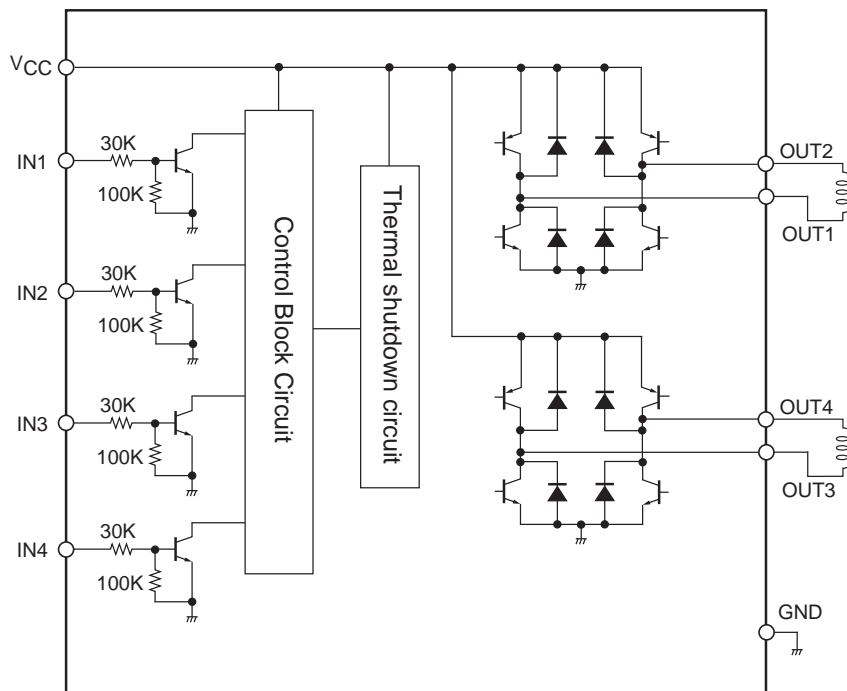






Timing Chart

(1) Stepper motor timing chart
Timing chart for 2-phase drive

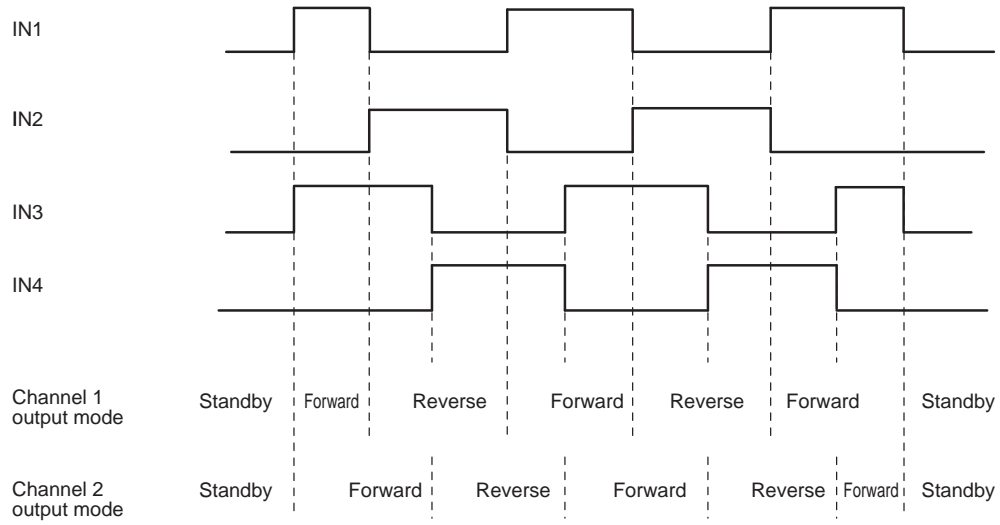

(2) Timing chart for 1-2 phase drive (Fastdecay mode)

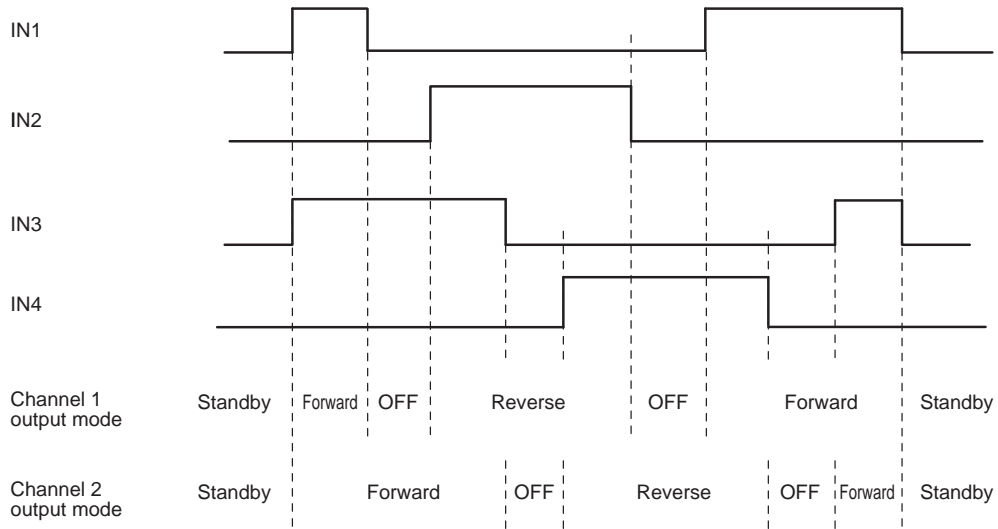

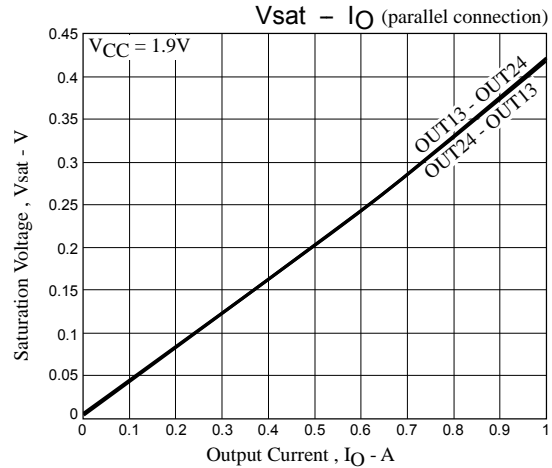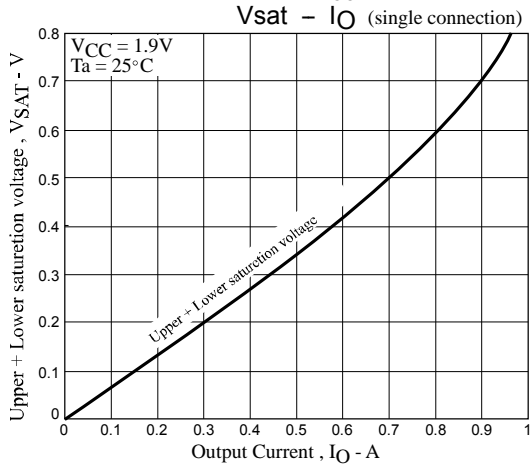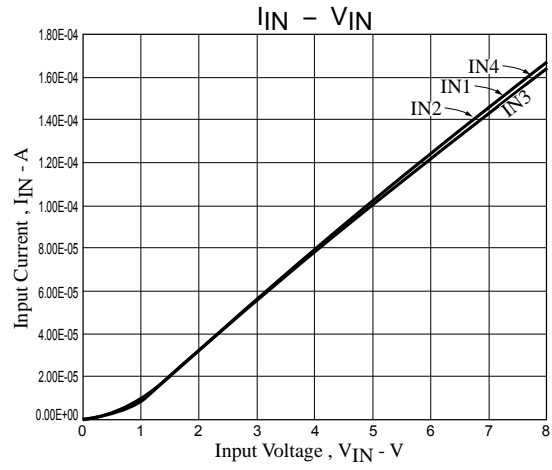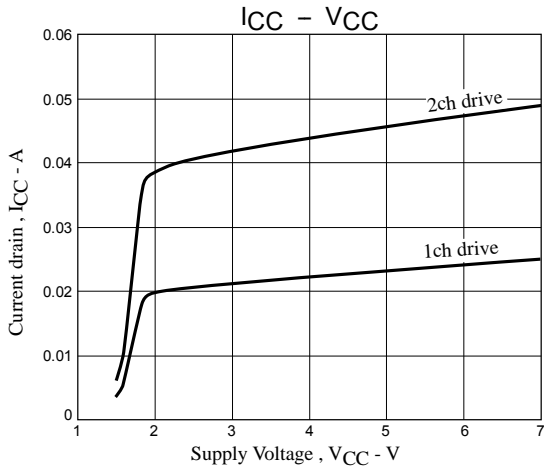

ON Semiconductor and the ON logo are registered trademarks of Semiconductor Components Industries, LLC (SCILLC). SCILLC reserves the right to make changes without further notice to any products herein. SCILLC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does SCILLC assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. SCILLC strives to supply high-quality high-reliability products and recommends adopting safety measures when designing equipment to avoid accidents or malfunctions. Such measures include but are not limited to protective circuits and error prevention circuits for safe design, redundant design, and structural design. "Typical" parameters which may be provided in SCILLC data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals," must be validated for each customer application by customer's technical experts. SCILLC shall not be held liable for any claim or suits with regard to a third party's intellectual property rights which has resulted from the use of the technical information and products mentioned above. SCILLC does not convey any license under its patent rights nor the rights of others. SCILLC products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the SCILLC product could create a situation where personal injury or death may occur. Should Buyer purchase or use SCILLC products for any such unintended or unauthorized application, Buyer shall indemnify and hold SCILLC and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that SCILLC was negligent regarding the design or manufacture of the part. SCILLC is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

PUBLICATION ORDERING INFORMATION

LITERATURE FULFILLMENT:
 Literature Distribution Center for ON Semiconductor
 P.O. Box 5163, Denver, Colorado 80217 USA
Phone: 303-675-2175 or 800-344-3860 Toll Free USA/Canada
Fax: 303-675-2176 or 800-344-3867 Toll Free USA/Canada
Email: orderlit@onsemi.com

N. American Technical Support: 800-282-9855 Toll Free
 USA/Canada
Europe, Middle East and Africa Technical Support:
 Phone: 421 33 790 2910
Japan Customer Focus Center
 Phone: 81-3-5773-3850

ON Semiconductor Website: www.onsemi.com
Order Literature: <http://www.onsemi.com/orderlit>

For additional information, please contact your local Sales Representative