

GENERAL DESCRIPTION

Metallized polypropylene dielectric capacitor with controlled self-healing.

Reinforced metallization developed for high impulse currents.

APPLICATIONS

- IGBT protection
- IGBT clamping

PACKAGING

- Parallelepipedic plastic case with thermosetting resin

ELECTRICAL CHARACTERISTICS

Capacitance Range C_n	0.10 μ F to 2.5 μ F
Tolerance on C_n	$\pm 5\%$: FSB1...5 $\pm 10\%$: FSB6
Rated DC Voltage V_{ndc}	850 to 2000 V
Stray Inductance	≤ 25 nH
RMS Current	I_{rms} max. = up to 28A The currents shown in the tables are maximum. It is necessary to respect the thermal limits of the dielectric 85°C see "Hot spot temperature calculation"
Insulation Resistance	$R_i \times C \geq 30,000$ s
Impulse Current	$I^2.t$ max. = up to 1.69 A ² s Spikes or peak currents in the capacitors may cause a deterioration of the bonding between the metallization and the connections. These bonds are capable of withstanding only a limited amount of energy for each spike. The table shows the maximum energy permitted in the form ($I^2.t$), where I is in Ampere, and t is in seconds.
Note: The formula ($I^2.t$) replaces dv/dt which is less easy to use as it is not an expression of energy ($I = C.dv/dt$). This type of capacitor has been designed to withstand high ($I^2.t$) values.	
Variation of Capacitance with Temperature	$\frac{\Delta C}{C} \leq \pm 2\%$ between -40 and +85°C
Climatic Category	40/085/56 (IEC 68)
Test Voltage Between Terminals @ 25°C	1.6 V_{ndc} during 10s
Withstanding Voltage Between Terminals and Case @ 25°C	@ 3 kVrms @ 50Hz during 1 min.


Medium Power Film Capacitors



FSB


GENERAL DESCRIPTION

BOX KIND: P0; 18; 19; 26; R68 FSB1..5
2 TERMINALS SOLUTION

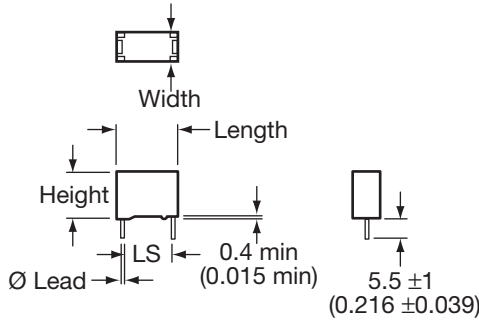

General Tolerance: $\pm 0.5\text{mm}$ (0.020)

BOX KIND: R68 FSB5
4 TERMINALS SOLUTION

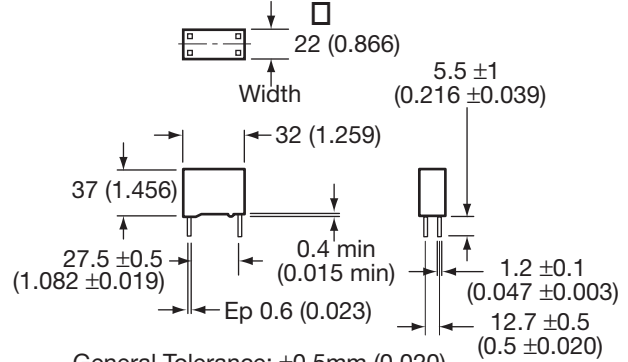

General Tolerance: $\pm 0.5\text{mm}$ (0.020)

PROTECTION

DIMENSIONS: millimeters (inches)

Box Kind	Length mm ± 0.40 (inches)	Width mm ± 0.40 (inches)	Height mm ± 0.30 (inches)	Dimensions lead mm $+10\%$ -0.05 (inches)	LS mm ± 0.40 (inches)
P0	31.1 (1.230)	13.0 (0.051)	22.4 (0.880)	\varnothing 0.80 (0.031)	27.5 (1.083)
18	31.1 (1.230)	14.6 (0.580)	25.7 (1.010)	\varnothing 0.80 (0.031)	27.5 (1.083)
19	31.1 (1.230)	17.3 (0.068)	29.8 (1.170)	\varnothing 0.80 (0.031)	27.5 (1.083)
26	31.1 (1.230)	20.8 (0.820)	31.3 (1.230)	\varnothing 1.00 (0.039)	27.5 (1.083)
R68 2 Terminals Solution	32.5 (1.280)	22.0 (0.870)	37.0 (1.460)	\varnothing 1.00 (0.039)	27.5 (1.083)
R68 4 Terminals Solution	32.5 (1.280)	22.0 (0.870)	37.0 (1.460)	1.20 x 0.60 (0.047 x 0.023)	27.5 (1.083)

References	Capacitance (μF)	Box Kind	(I ² t) (A ² s)	I _{rms} (A)	R _s (m Ω)	R _{th} (hotspot/amb.)
U_{dc} = 1200V		V_{peak} = 1600V		V_{rms} = 560V		V_s = 2000V
FSB16U0154J--	0.15	P0	0.05	3	14.3	45.9
FSB26U0274J--	0.27	18	0.15	7.6	8.4	36.8
FSB36U0394J--	0.39	19	0.31	11	6.2	32.2
FSB46U0474J--	0.47	26	0.41	12	5.6	29.4
FSB56U0684J--	0.68	R68 (2 terminals)	0.94	12	3.8	23.7
FSB56U0684JJC	0.68	R68 (4 terminals)	0.94	16.7	3.8	23.7
U_{dc} = 1600V		V_{peak} = 2000V		V_{rms} = 630V		V_s = 2300V
FSB16M0134J--	0.13	P0	0.05	4.6	13.3	44.9
FSB26M0184J--	0.18	18	0.1	6.4	9.9	35.9
FSB36M0244J--	0.24	19	0.18	8.5	7.8	32.4
FSB46M0334J--	0.33	26	0.35	11.7	5.6	28.6
FSB56M0434J--	0.43	R68 (2 terminals)	0.59	12	4.6	23.8
FSB56M0434JJC	0.43	R68 (4 terminals)	0.59	15.2	4.6	23.8
U_{dc} = 2000V		V_{peak} = 2400V		V_{rms} = 700V		V_s = 2600V
FSB16N0104J--	0.1	P0	0.05	4.2	14.3	44.6
FSB26N0134J--	0.13	18	0.08	5.5	11.3	35.7
FSB36N0184J--	0.18	19	0.15	7.6	8.5	32.1
FSB46N0224J--	0.22	26	0.22	9.3	6.8	29.1
FSB56N0304J--	0.3	R68 (2 terminals)	0.41	12	5.3	23.8
FSB56N0304JJC	0.3	R68 (4 terminals)	0.41	12.7	5.3	23.8




Medium Power Film Capacitors



FSB

FSB6

Plastic case resin filled
Dimensions: millimeters (inches)

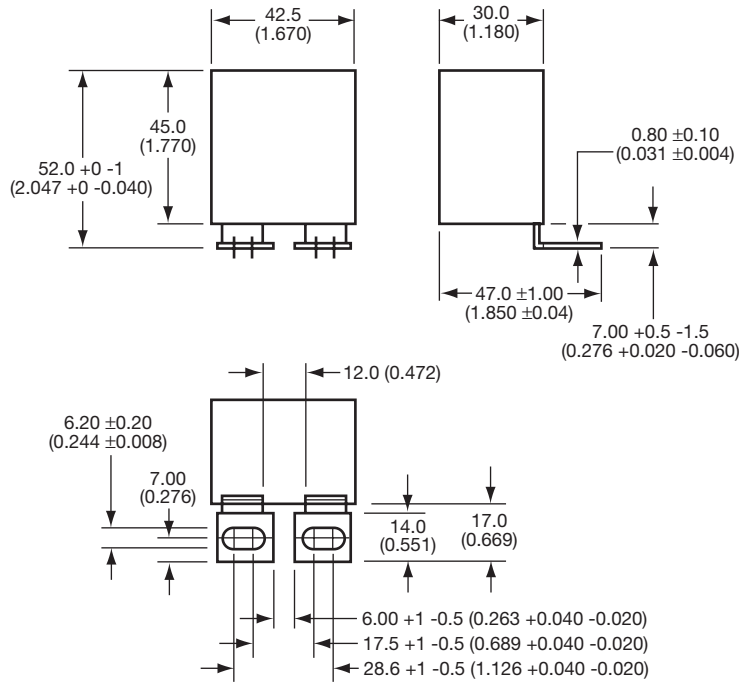

GENERAL TOLERANCES: $\pm 0.50\text{mm}$ (± 0.020 inches)

PROTECTION

Part Number	Capacitance (μF)	(I ² t) (A ² s)	I _{rms max.} (A)	R _s (m Ω)	R _{th} (°C/W)
FSB 850V	V_{ndc} = 850V	V_{peak} = 1200V	V_{rms} = 450V	V_s = 1500V	
FSB66B0205K--	2	0.99	25	3.4	19.1
FSB66B0225K--	2.2	1.19	28	3.1	18.6
FSB66B0255K--	2.5	1.54	28	2.7	17.8
FSB 1200V	V_{ndc} = 1200V	V_{peak} = 1600V	V_{rms} = 560V	V_s = 2000V	
FSB66U0105K--	1	1.47	25	3.6	17.2
FSB66U0125K--	1.2	1.69	26	3.4	17.5
FSB66U0155K--	1.5	1	26	3.4	17.5
FSB 2000V	V_{ndc} = 2000V	V_{peak} = 2400V	V_{rms} = 700V	V_s = 2600V	
FSB66N0474K--	0.47	0.41	22	6.3	19.4
FSB66N0564K--	0.56	0.62	23	5.2	17.9
FSB66N0684K--	0.68	0.91	24	4.4	17.3





STANDARDS

IEC 61071-1, IEC 61071-2: Power electronic capacitors


TANGENT OF LOSS ANGLE (TANδ₀) FOR POLYPROPYLENE DIELECTRIC

Polypropylene has a constant dielectric loss factor of 2x10⁻⁴ irrespective of temperature and frequency (up to 1 MHz).

IGBT SNUBBER

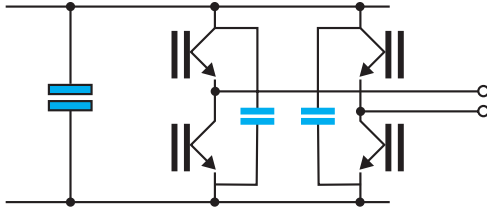

With



L = stray inductance IGBT + capacitor

R = serial resistance IGBT + capacitor

HOT SPOT TEMPERATURE CALCULATION

$$\theta_{\text{hot spot}} = \theta_{\text{ambient}} + (P_d + P_t) \times R_{th}$$

with P_d (Dielectric losses) = $Q \times \text{tg}\delta_0$
 $\Rightarrow [\frac{1}{2} \times C_n \times (V_{\text{ripple peak to peak}})^2 \times f] \times (2 \times 10^{-4})$
 P_t (Thermal losses) = $R_s \times (I_{\text{rms}})^2$
 R_{th} : $R_{th \text{ ambient / hot spot}}$ in °C/W

where C_n in Farad I_{rms} in Ampere f in Hertz
 V in Volt R_s in Ohm θ in °C

Due to the design of the capacitor and its technology, the thermal impedance between the terminations and the core of the capacitor is low, it is necessary to take care that the capacitor is never overheated by use of wrongly sized connections.

Do not use the capacitor as a heat sink.

Due to the complexity of the IGBT / capacitor thermal exchanges, we recommend that thermal measurements shall be made on the different components. We would be pleased to advise you on specific problems.

WORKING TEMPERATURE

(according to the power to be dissipated) -40°C to +85°C

MARKING

- TPC logo
- Capacitance and tolerance in clear
- Nominal DC voltage in clear
- RMS current in clear
- Date of manufacture (IEC coding)

$$I_{\text{eff}} = \sqrt{\left[\frac{C\beta_0^2 \times U_0}{2j\beta} \right]^2 \times \frac{1}{T} \times \left[\frac{e^{-2\alpha \times T}}{\beta^2 + \alpha^2} \times [\beta \sin(2\beta \times T) - \alpha \times \cos(2\beta \times T)] + \frac{1}{\alpha} \times e^{-2\alpha \times T} + \frac{\alpha}{\beta^2 + \alpha^2} - \frac{1}{\alpha} \right]}$$

with $\beta_0 = \sqrt{\frac{1}{LC}}$; $\alpha = \frac{R}{2L}$; $\beta = \sqrt{\beta_0^2 - \alpha^2}$