

MT6736 Series


Specifications:

Parameters	Units	MT6736A04NP
▶ Min Sound Pressure Level at 10cm	dB(A)	72
Rated Voltage	V _{o-p}	3.6
Operating Voltage	V _{o-p}	2 - 5
Resonance Frequency	Hz	3200
▶ Max Operating Current	mA	80
Coil Resistance	Ω	18 ± 2
Operating Temperature	°C	-20 - +70
Case Material	-	Noryl
Weight	g	1.0



Unit: mm • Tolerance: ±0.5mm


▶ Value applying rated voltage (1/2 duty square wave, resonance frequency)

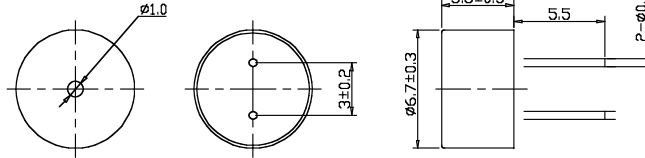

MT9040 Series


Specifications:

Parameters	Units	MT9040A03NP
▶ Min Sound Pressure Level at 10cm	dB(A)	82
Rated Voltage	V _{o-p}	3
Operating Voltage	V _{o-p}	2 - 5
Resonance Frequency	Hz	2731
▶ Max Operating Current	mA	70
Coil Resistance	Ω	20 ± 3
Operating Temperature	°C	-20 - +70
Case Material	-	Noryl
Weight	g	0.6



Unit: mm • Tolerance: ±0.5mm

▶ Value applying rated voltage (1/2 duty square wave, resonance frequency)

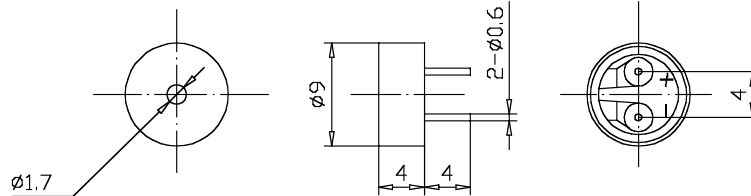

MT9040G Series

Specifications:

Parameters	Units	MT9040GA01NP	MT9040GA03NP
▶ Min Sound Pressure Level at 10cm	dB(A)	85	85
Rated Voltage	V _{o-p}	1.5	3
Operating Voltage	V _{o-p}	1 - 3	2 - 4
Resonance Frequency	Hz	2731	2731
▶ Max Operating Current	mA	80	90
Coil Resistance	Ω	5.5 ± 1	15 ± 3
Operating Temperature	°C	-20 - +70	-20 - +70
Case Material	-	Noryl	Noryl
Weight	g	1.0	1.0



Unit: mm • Tolerance: ±0.5mm

▶ Value applying rated voltage (1/2 duty square wave, resonance frequency)

