

Surface Mount Power Splitter/Combiner

SCP-2-1+ SCP-2-1

2 Way-0° 50Ω

0.1 to 400 MHz




Maximum Ratings

Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
Power Input (as a splitter)	1W max.
Internal Dissipation	0.125W max.


Pin Connections

SUM PORT	1
PORT 1	5
PORT 2	6
GROUND	2,3,4,7,8

Outline Drawing

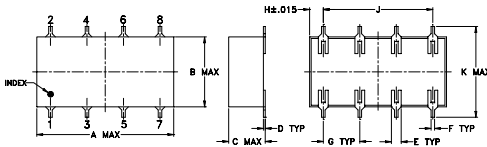

PCB Land Pattern




Suggested Layout,
Tolerance to be within ±.002

Outline Dimensions (inch/mm)

A	B	C	D	E	F	G
.75	.38	.20	.010	.050	.020	.200
19.05	9.65	5.08	0.25	1.27	0.51	5.08
H	J	K	M	N	P	wt
.075	.600	.450	.470	.100	.150	grams
1.91	15.24	11.43	11.94	2.54	3.81	1.6

Demo Board MCL P/N: TB-50+ Suggested PCB Layout (PL-060)

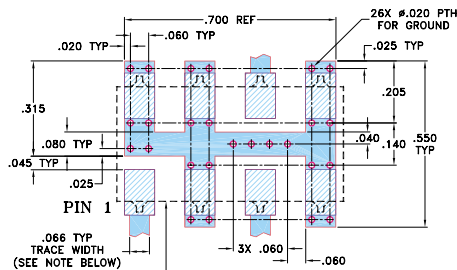

- NOTES: 1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS .030" ± .002". COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
- DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
 - DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

Features

- wideband, 0.1 to 400 MHz
- low insertion loss, 0.2 dB typ.
- good isolation, 30 dB typ.
- good amplitude unbalance, 0.05 dB typ.

Applications

- VHF/UHF
- instrumentation
- communication receivers & transmitters

CASE STYLE: YY101
PRICE: \$10.45 ea. QTY(10-49)

+ RoHS compliant in accordance with EU Directive (2002/95/EC)

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications.




Electrical Specifications

FREQ. RANGE (MHz)	ISOLATION (dB)			INSERTION LOSS (dB) ABOVE 3.0 dB			PHASE UNBALANCE (Degrees)			AMPLITUDE UNBALANCE (dB)								
	L	M	U	L	M	U	L	M	U	L	M	U						
f _L -f _U	Typ. Min.	Typ. Min.	Typ. Min.	Typ. Max.	Typ. Max.	Typ. Max.	Max.	Max.	Max.	Max.	Max.	Max.						
0.1-400	25	15	30	20	25	20	0.3	1.2	0.2	0.6	0.4	1.1	2.0	2.0	3.0	0.15	0.2	0.3


L = low range [f_L to 10 f_L] M = mid range [10 f_L to f_U/2] U = upper range [f_U/2 to f_U]

Typical Performance Data

Frequency (MHz)	Insertion Loss (dB)		Amplitude Unbalance (dB)	Isolation (dB)	Phase Unbalance (deg.)	VSWR S	VSWR 1	VSWR 2
	S-1	S-2						
0.10	3.57	3.60	0.03	22.88	0.28	1.54	1.91	1.81
0.21	3.39	3.43	0.03	27.70	0.11	1.24	1.42	1.40
0.44	3.35	3.35	0.01	31.60	0.08	1.13	1.25	1.25
0.78	3.31	3.31	0.01	33.21	0.09	1.10	1.19	1.19
1.00	3.30	3.30	0.01	33.43	0.06	1.09	1.18	1.17
5.88	3.18	3.22	0.04	33.40	0.20	1.10	1.11	1.10
10.75	3.19	3.23	0.04	33.49	0.18	1.11	1.10	1.09
20.50	3.20	3.23	0.04	33.70	0.03	1.12	1.09	1.09
30.25	3.20	3.21	0.01	33.64	0.11	1.12	1.09	1.08
80.00	3.25	3.27	0.02	32.14	0.02	1.13	1.07	1.07
160.00	3.30	3.31	0.02	28.71	0.12	1.14	1.06	1.06
240.00	3.37	3.39	0.02	27.98	0.10	1.13	1.04	1.04
320.00	3.44	3.46	0.02	29.46	0.15	1.13	1.06	1.06
360.00	3.49	3.50	0.00	29.42	0.29	1.17	1.08	1.08
400.00	3.58	3.57	0.01	28.04	0.34	1.22	1.11	1.13

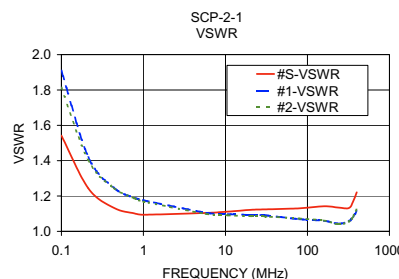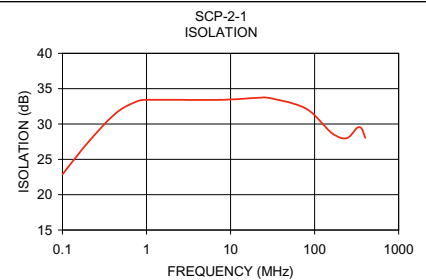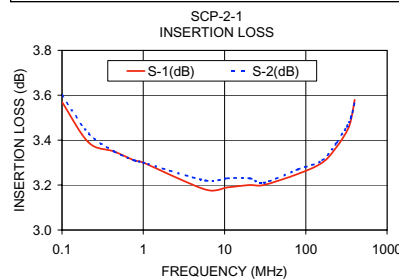

electrical schematic

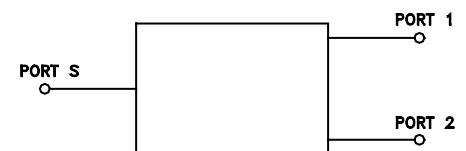

Mini-Circuits®
ISO 9001 ISO 14001 CERTIFIED

ALL NEW
minicircuits.com

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site



The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com

RF/IF MICROWAVE COMPONENTS

REV. B
M102713
SCP-2-1
HY/TD/CP
070522