

PCI-5S

u-blox 5 GPS module

Product description

The PCI-5S enables simple integration of GPS functionality into MIDs, UMPCs, laptops and similar applications. The PCI-5S is a ready-to-use solution, composed of a GPS chipset incorporated into the PCI Express Mini Card platform. It features the high performance u-blox 5 positioning engine and includes a USB 2.0 interface.




50.95 x 30 x 3.0 mm

Highlights

- 50-channel u-blox5 engine with over 1 million effective correlators
- < 1 second Time-To-First-Fix for hot and aided starts
- -160 dBm SuperSense® indoor GPS acquisition and tracking sensitivity
- Accelerated startup at weak signals with KickStart feature
- A-GPS: AssistNow Online and AssistNow Offline; OMA SUPL compliant
- High immunity to jamming
- SBAS (WAAS, EGNOS, MSAS, GAGAN)
- 1 USB V2.0
- Mini PCI Card form factor

Block Diagram

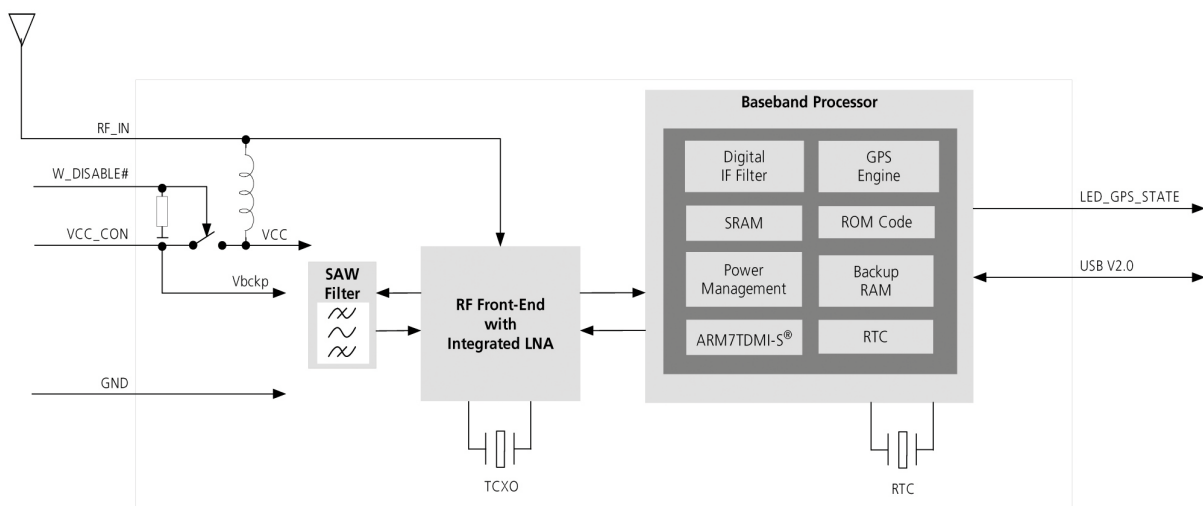

PCI-5S Block Schematic

Electrical data

Power supply	3.3V supply rail: 2.7 to 3.6V 1.5V supply rail: Not used
Power consumption	123 mW @ 3.0V Eco mode
Backup power	1.5V to 3.6V, typ. 5 μ A
Antenna	Active and passive

Environmental data

Operating Temp.	-40°C to 85°C
Storage Temp.	-40°C to 85°C
	RoHS compliant (lead-free)

Support products

EVK-5H	u-blox5 GPS Evaluation Kit
--------	----------------------------

An easy-to-use kit to get familiar with the u-blox5 positioning technology, and to evaluate functionality and to visualize GPS performance.

Ordering information

PCI-5S-1	ROM-based u-blox5 PCI Express MiniCard
----------	--

Available as samples and tape on reel (250 pieces)

Legal Notice

u-blox reserves all rights to this document and the information contained herein. Products, names, logos and designs described herein may in whole or in part be subject to intellectual property rights. Reproduction, use, modification or disclosure to third parties of this document or any part thereof without the express permission of u-blox is strictly prohibited.

The information contained herein is provided "as is". No warranty of any kind, either express or implied, is made in relation to the accuracy, reliability, fitness for a particular purpose or content of this document. This document may be revised by u-blox at any time. For most recent documents, please visit www.u-blox.com.

Copyright © 2009, u-blox AG

Interfaces

Antenna Conn.	Hirose U.FL-R-SMT
Serial interfaces	1 USB V2.0 full speed 12 Mbit/s (Through PCI connector)
Digital I/O	LED_GPS_STATE Radio state indicator

Receiver performance data

Receiver type	50-channel u-blox5 engine GPS L1 C/A code SBAS: WAAS, EGNOS, MSAS, GAGAN
Max. update rate	4 Hz
Accuracy ¹	Position 2.5 m CEP SBAS 2.0 m CEP
Acquisition ¹	Cold starts: 29 s Warm starts: 29 s Aided starts ² : < 1 s Hot starts: < 1 s
Sensitivity	Acquisition: -160 dBm Tracking: -160 dBm Cold starts ³ : -144 dBm
Multipath suppression	Intelligent multipath detection and suppression
GPS protocols	NMEA, UBX Binary
A-GPS	Supports AssistNow Online and AssistNow Offline, OMA SUPL compliant
Operational limits	Velocity: 500 m/s (972 knots) Altitude: 50,000 m

¹ All SV @ -130 dBm

² Dependent on aiding data connection speed and latency

³ Demonstrated with a good active antenna

Contact us

HQ Switzerland +41 44 722 7444 info@u-blox.com	China +86 10 68 133 545 info_cn@u-blox.com
---	--

EMEA +41 44 722 7477 info@u-blox.com	Japan +81 3 5775 3850 info_jp@u-blox.com
---	--

Americas +1 703 483 3180 info_us@u-blox.com	Korea +82 02 542 0861 info_kr@u-blox.com
---	--

APAC – Singapore +65 6734 3811 info_ap@u-blox.com	Taiwan +886 2 2657 1090 info_tw@u-blox.com
---	--